
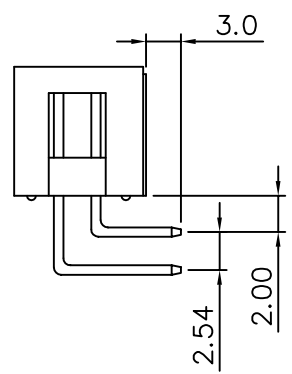


Recommended P.C.Board layout
Bottom View

SPECIFICATIONS
 Current Rating: 3 Amp Max
 Dielectric Withstanding Voltage: 1000V AC
 R.M.S. For One Minute
 Contact Resistance: 20Milliohms Max.
 Insulation Resistance: 5000 Megohms Min.
 At 1000V DC
 Operating Temperature: -55°C To +105°C
 Contact : SQ 0.64mm, Brass, Gold Plating
 Insulation : PBT(UL 94V-0)

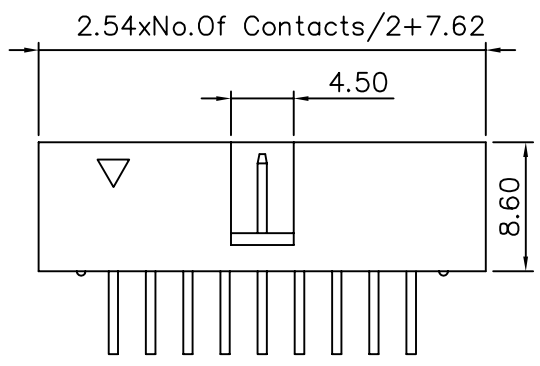

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.30 .XX ±0.20 AWG.
03526		MEI		
		RAN		
		DRAWING BY		
		HZF		
SCALE	NONE	REV.	A	UNIT mm

AREA	REVISIONS	CHK	DATE