

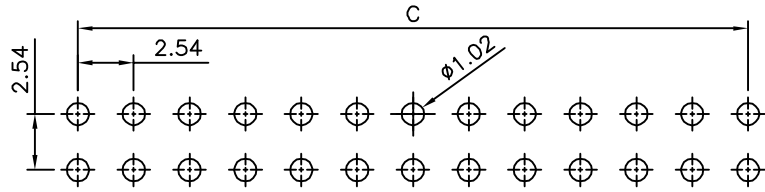
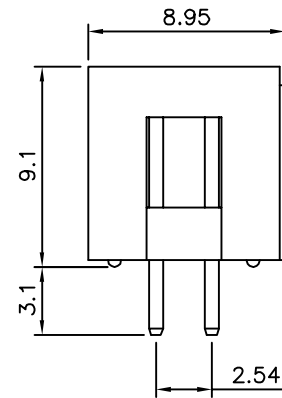


SPECIFICATION

Current Rating:3.0 Amp Max.
 Withstand Voltage:1000V AC RMS For 1 Minute
 Insulation Resistance:1000 Megohms Min. At 1000V DC
 Operation Temperature:-55°C~+105°C
 Housing:PBT(UL94V-0),Gray
 ⚠ Terminal:Copper Alloy,Gold Flash
 RoHS Compliant

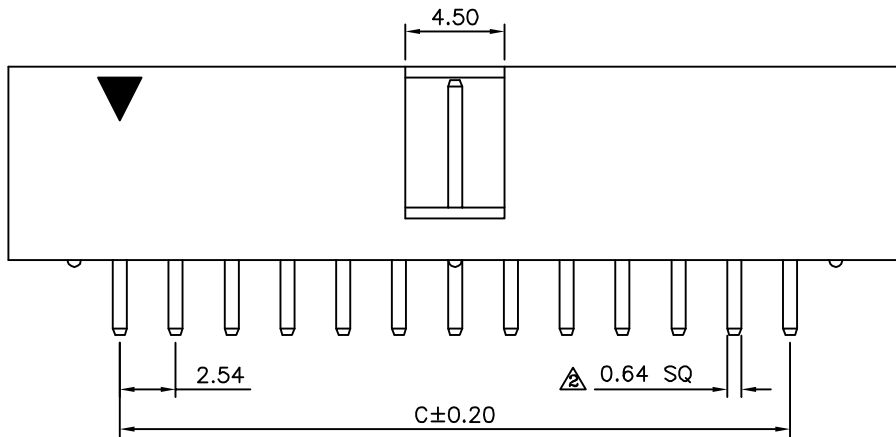

Recommended P.C.B. Layout(Top View)

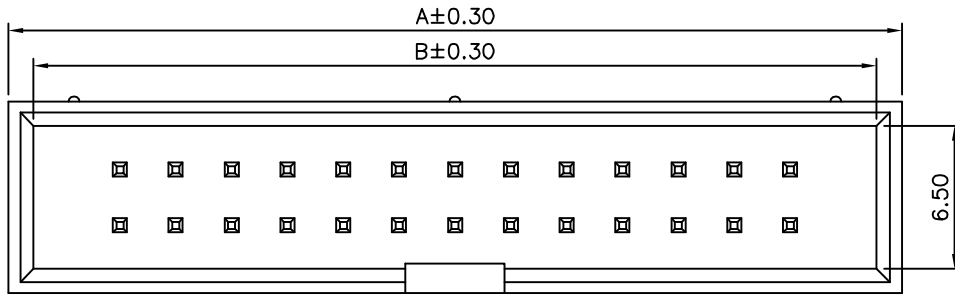

Pos.	A	B	C
06	15.24	12.94	5.08
08	17.78	15.48	7.62
10	20.32	18.02	10.16
12	22.86	20.56	12.70
14	25.40	23.10	15.24
16	27.94	25.64	17.78
20	33.02	30.72	22.86
24	38.10	35.80	27.94
26	40.64	38.34	30.48
30	45.72	43.42	35.56
34	50.80	48.50	40.64
40	58.42	56.12	48.26
44	63.50	61.20	53.34
50	71.12	68.82	60.96

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

03555

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

QQJ

SCALE

NONE


REV.

B2

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 .X ±0.30
 .XX ±0.20
 .XXX ±0.10
 ANG.

UNIT

mm



NO.	REV.	REVISIONS	CHK	DATE
⚠	B2	Modify Data	HZF	10/11/2010
⚠	B1	MODIFY DIM	HZF	07/15/2008
⚠	B0	NEW RELEASE	BECKY	06/20/2005