

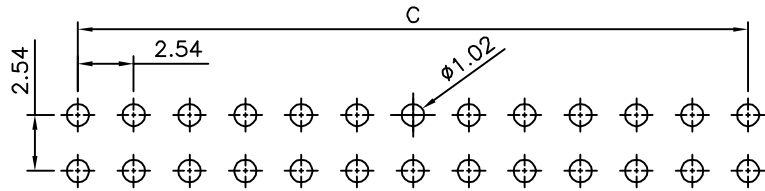
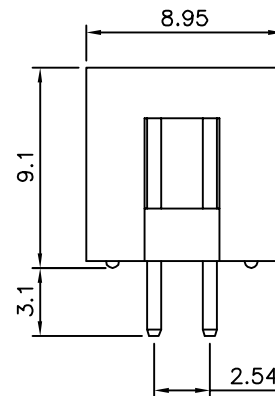


SPECIFICATION

Current Rating:3.0 Amp Max.
 Withstand Voltage:1000V AC RMS For 1 Minute
 Insulation Resistance:1000 Megohms Min. At 1000V DC
 Operation Temperature:-55°C~+105°C
 Housing:PBT(UL94V-0),Gray
 ⚠ Terminal:Copper Alloy,Gold Flash
 RoHS Compliant

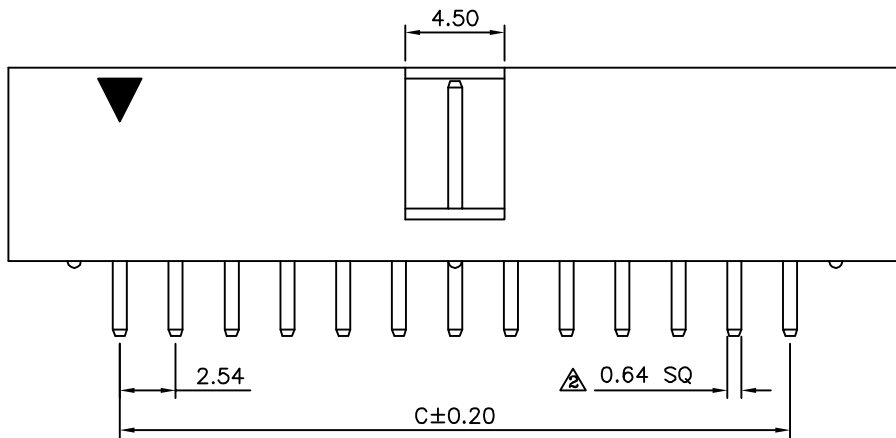

Recommended P.C.B. Layout(Top View)

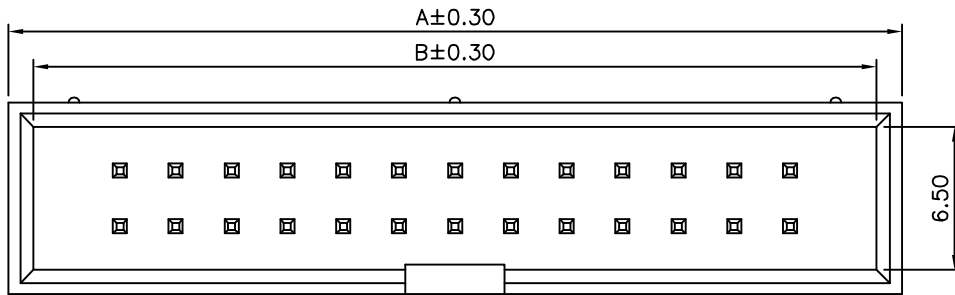

| Pos. | A | B | C |
|------|-------|-------|-------|
| 06 | 15.24 | 12.94 | 5.08 |
| 08 | 17.78 | 15.48 | 7.62 |
| 10 | 20.32 | 18.02 | 10.16 |
| 12 | 22.86 | 20.56 | 12.70 |
| 14 | 25.40 | 23.10 | 15.24 |
| 16 | 27.94 | 25.64 | 17.78 |
| 20 | 33.02 | 30.72 | 22.86 |
| 24 | 38.10 | 35.80 | 27.94 |
| 26 | 40.64 | 38.34 | 30.48 |
| 30 | 45.72 | 43.42 | 35.56 |
| 34 | 50.80 | 48.50 | 40.64 |
| 40 | 58.42 | 56.12 | 48.26 |
| 44 | 63.50 | 61.20 | 53.34 |
| 50 | 71.12 | 68.82 | 60.96 |

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

03561

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

QQJ

SCALE


NONE

REV.

B2

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 .X ±0.30
 .XX ±0.20
 .XXX ±0.10
 ANG.

UNIT mm



| NO. | REV. | REVISIONS | CHK | DATE |
|------|------|-------------|-------|------------|
| ⚠ B2 | | Modify Data | HZF | 10/11/2010 |
| ⚠ B1 | | MODIFY DIM | HZF | 07/15/2008 |
| ⚠ B0 | | NEW RELEASE | BECKY | 06/20/2005 |