

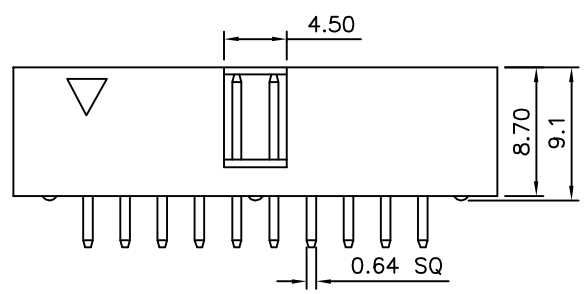


**SPECIFICATION**  
 Current Rating: 1 Amp  
 Withstand Voltage: 500V For One Minute  
 Insulation Resistance: 1000 Megaohms At 500V DC  
 Operation Temperature: -55°C ~ +105°C  
 Insulator: PBT+30%G.F.(UL94V-0), Black  
 Contact: Brass, Gold Plated Over Nickel  
 RoHS Compliant

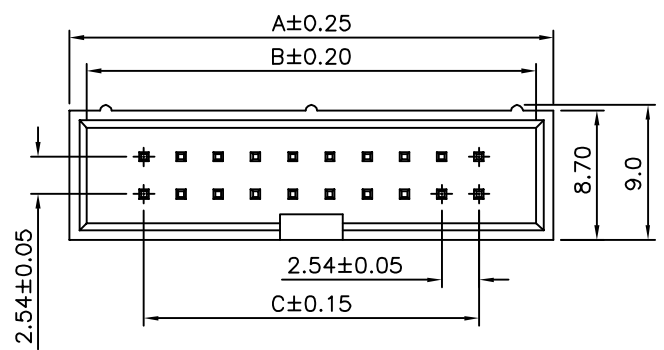

Pin	A	B	C
10	20.32	18.00	10.16
14	25.40	23.08	15.24
16	27.94	25.62	17.78
20	33.02	30.70	22.86
24	38.10	35.78	27.94
26	40.64	38.32	30.48
30	45.72	43.40	35.56
34	50.80	48.48	40.64
40	58.42	56.10	48.26
50	71.12	68.80	60.96
60	83.82	81.50	73.66
64	88.90	86.58	78.74

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. $\pm 0.25$ .X $\pm 0.20$ .XX $\pm 0.10$
03562		EMILY		
		CHECKED BY HZF		
SCALE NONE		DRAWING BY GAO		
		REV.	B1	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△	B1	Modify Data	HZF	02/18/2013
△	B0	NEW RELEASE	HZF	05/07/2010