

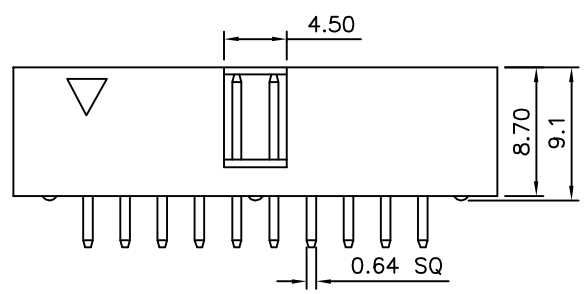


**SPECIFICATION**  
 Current Rating:1 Amp  
 Withstand Voltage:500V For One Minute  
 Insulation Resistance:1000 Megaohms  
 At 500V DC  
 Operation Temperature:-55°C~+105°C  
 Insulator:PBT+30%G.F.(UL94V-0),Black  
 Contact:Brass,Gold Plated Over Nickel  
 RoHS Compliant

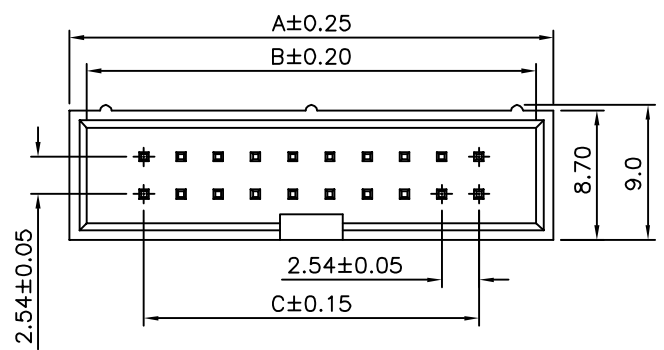

Pin	A	B	C
10	20.32	18.00	10.16
14	25.40	23.08	15.24
16	27.94	25.62	17.78
20	33.02	30.70	22.86
24	38.10	35.78	27.94
26	40.64	38.32	30.48
30	45.72	43.40	35.56
34	50.80	48.48	40.64
40	58.42	56.10	48.26
50	71.12	68.80	60.96
60	83.82	81.50	73.66
64	88.90	86.58	78.74

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.25 .X ±0.20 .XX ±0.10
03563		EMILY		
		CHECKED BY		
		HZF		
		DRAWING BY		
		GAO		
SCALE	NONE	REV.	B1	UNIT
				mm

NO.	REV.	REVISIONS	CHK	DATE
△	B1	Modify Data	HZF	02/18/2013
△	B0	NEW RELEASE	HZF	05/07/2010