


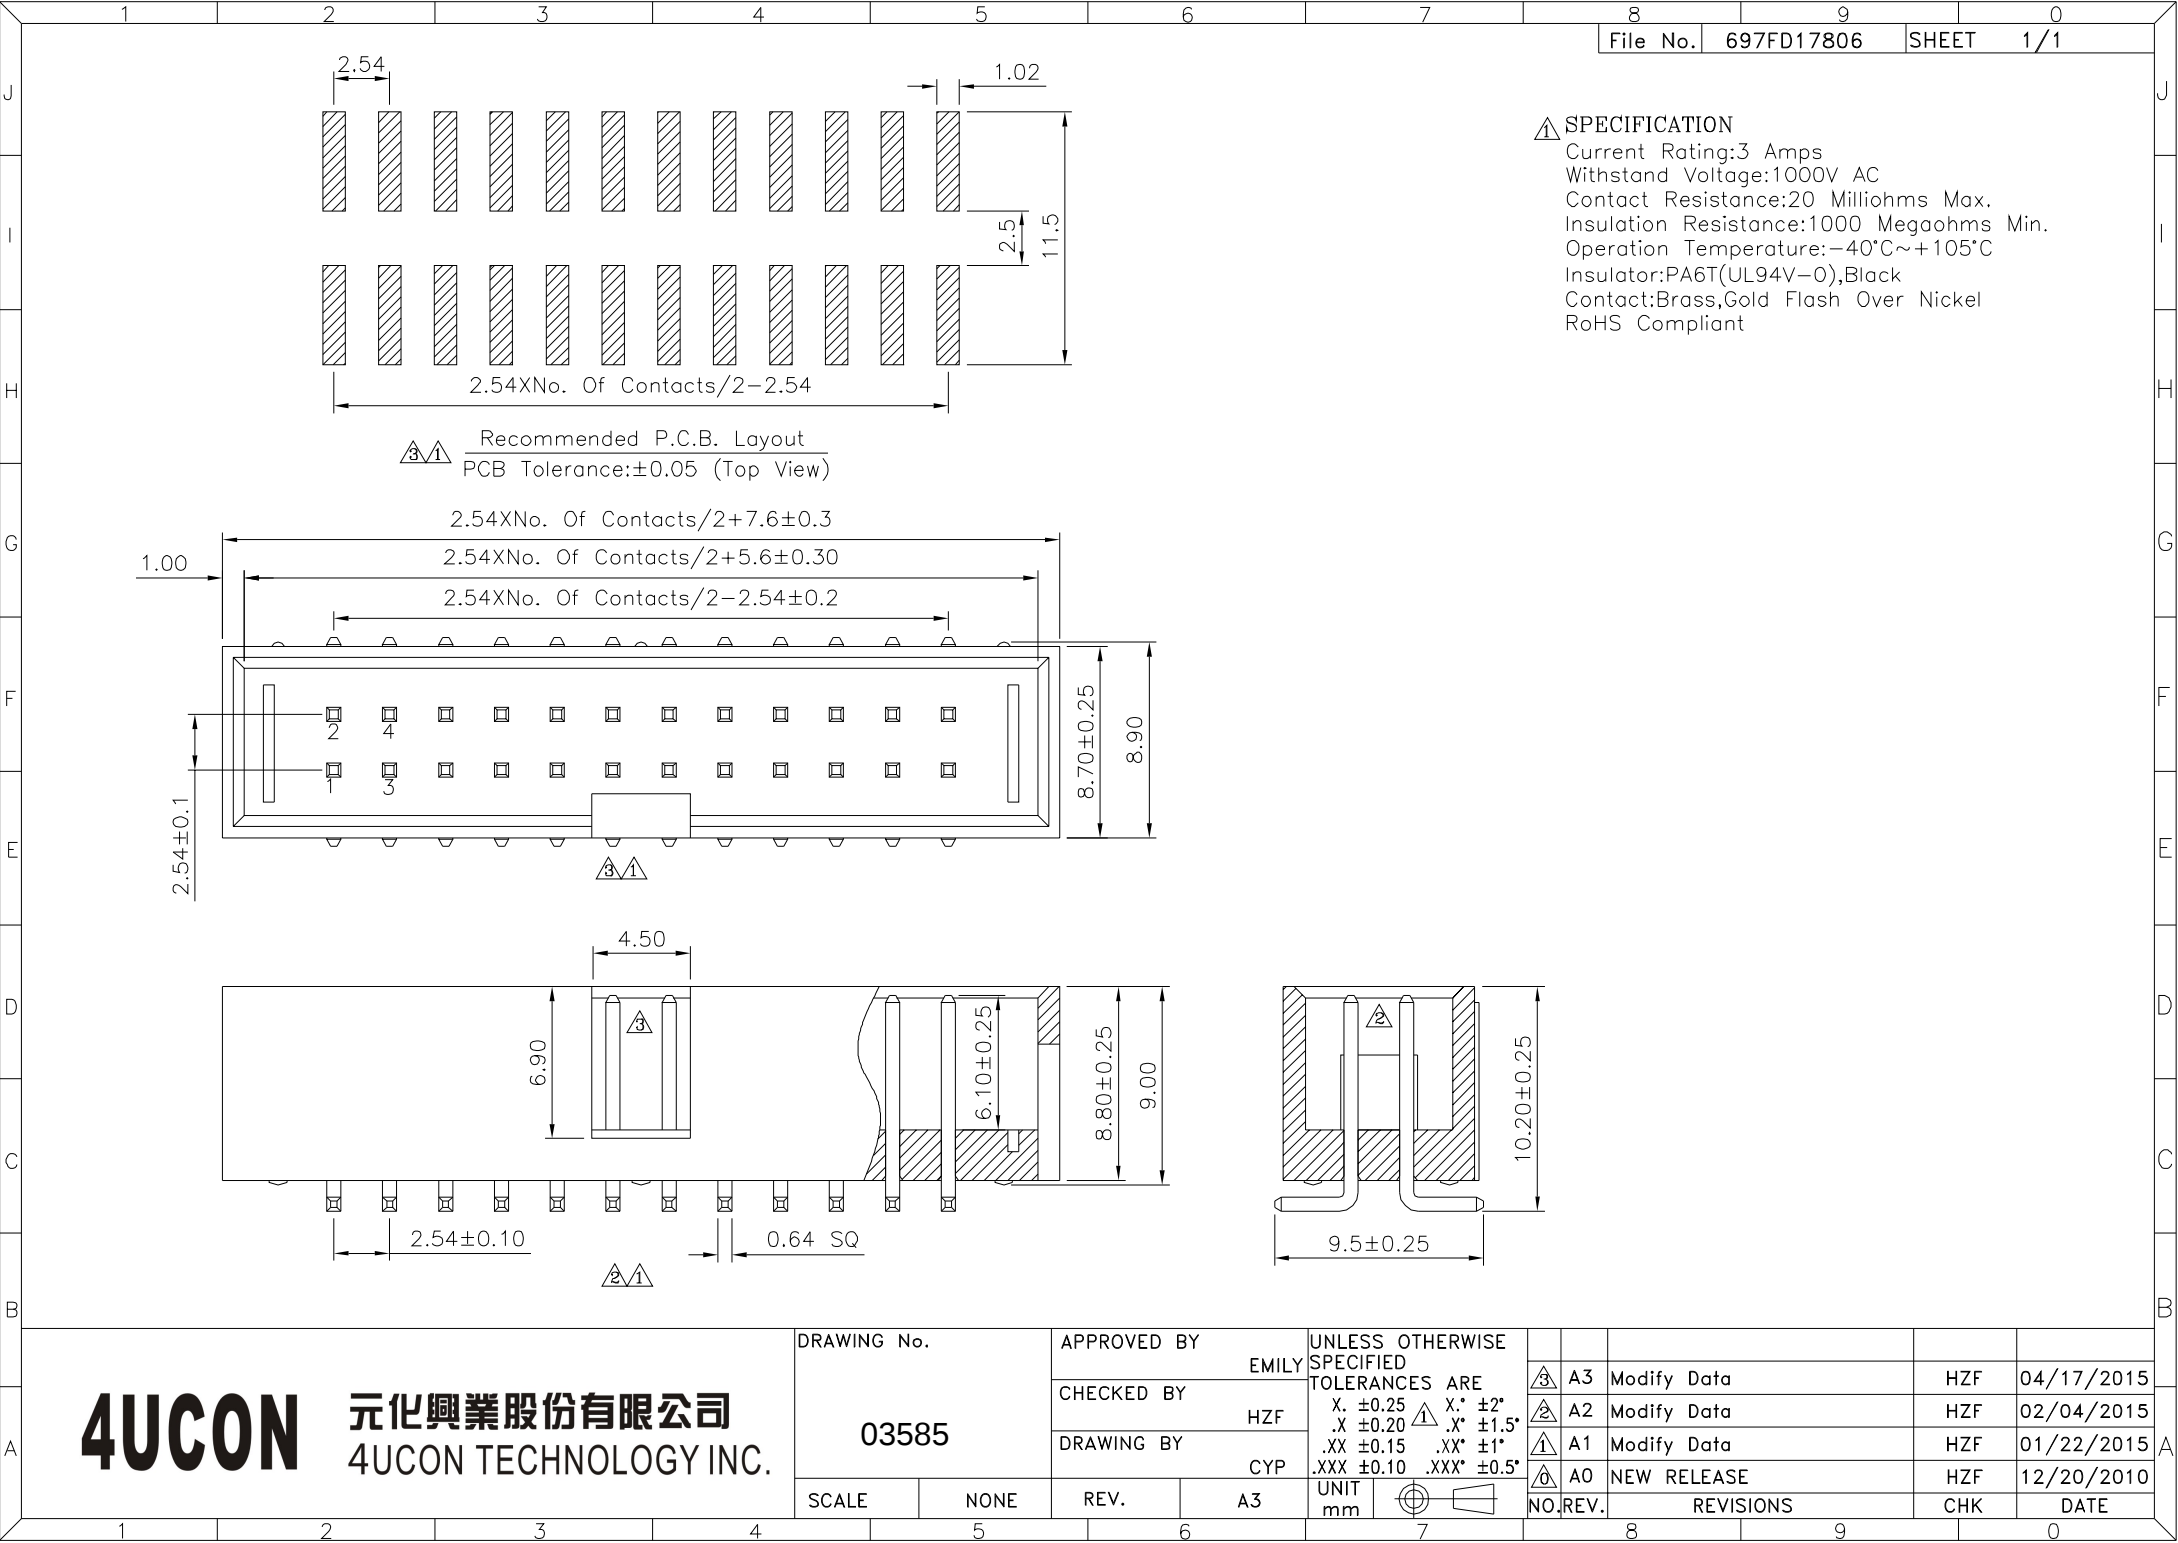

△ SPECIFICATION
Current Rating:3 Amps
Withstand Voltage:1000V AC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Insulator:PA6T(UL94V-0),Black
Contact:Brass,Gold Flash Over Nickel
RoHS Compliant

△△ Recommended P.C.B. Layout
PCB Tolerance:±0.05 (Top View)

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY	
		EMILY	
		CHECKED BY	
03585		HZF	
		DRAWING BY	
		CYP	
SCALE	NONE	REV.	A3

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE					
X. ±0.25 X.* ±2°				△ A3	Modify Data
.X ±0.20 △ .X* ±1.5°				△ A2	Modify Data
.XX ±0.15 .XX* ±1°				△ A1	Modify Data
.XXX ±0.10 .XXX* ±0.5°				△ A0	NEW RELEASE
UNIT	mm			NO. REV.	REVISIONS
				CHK	DATE