


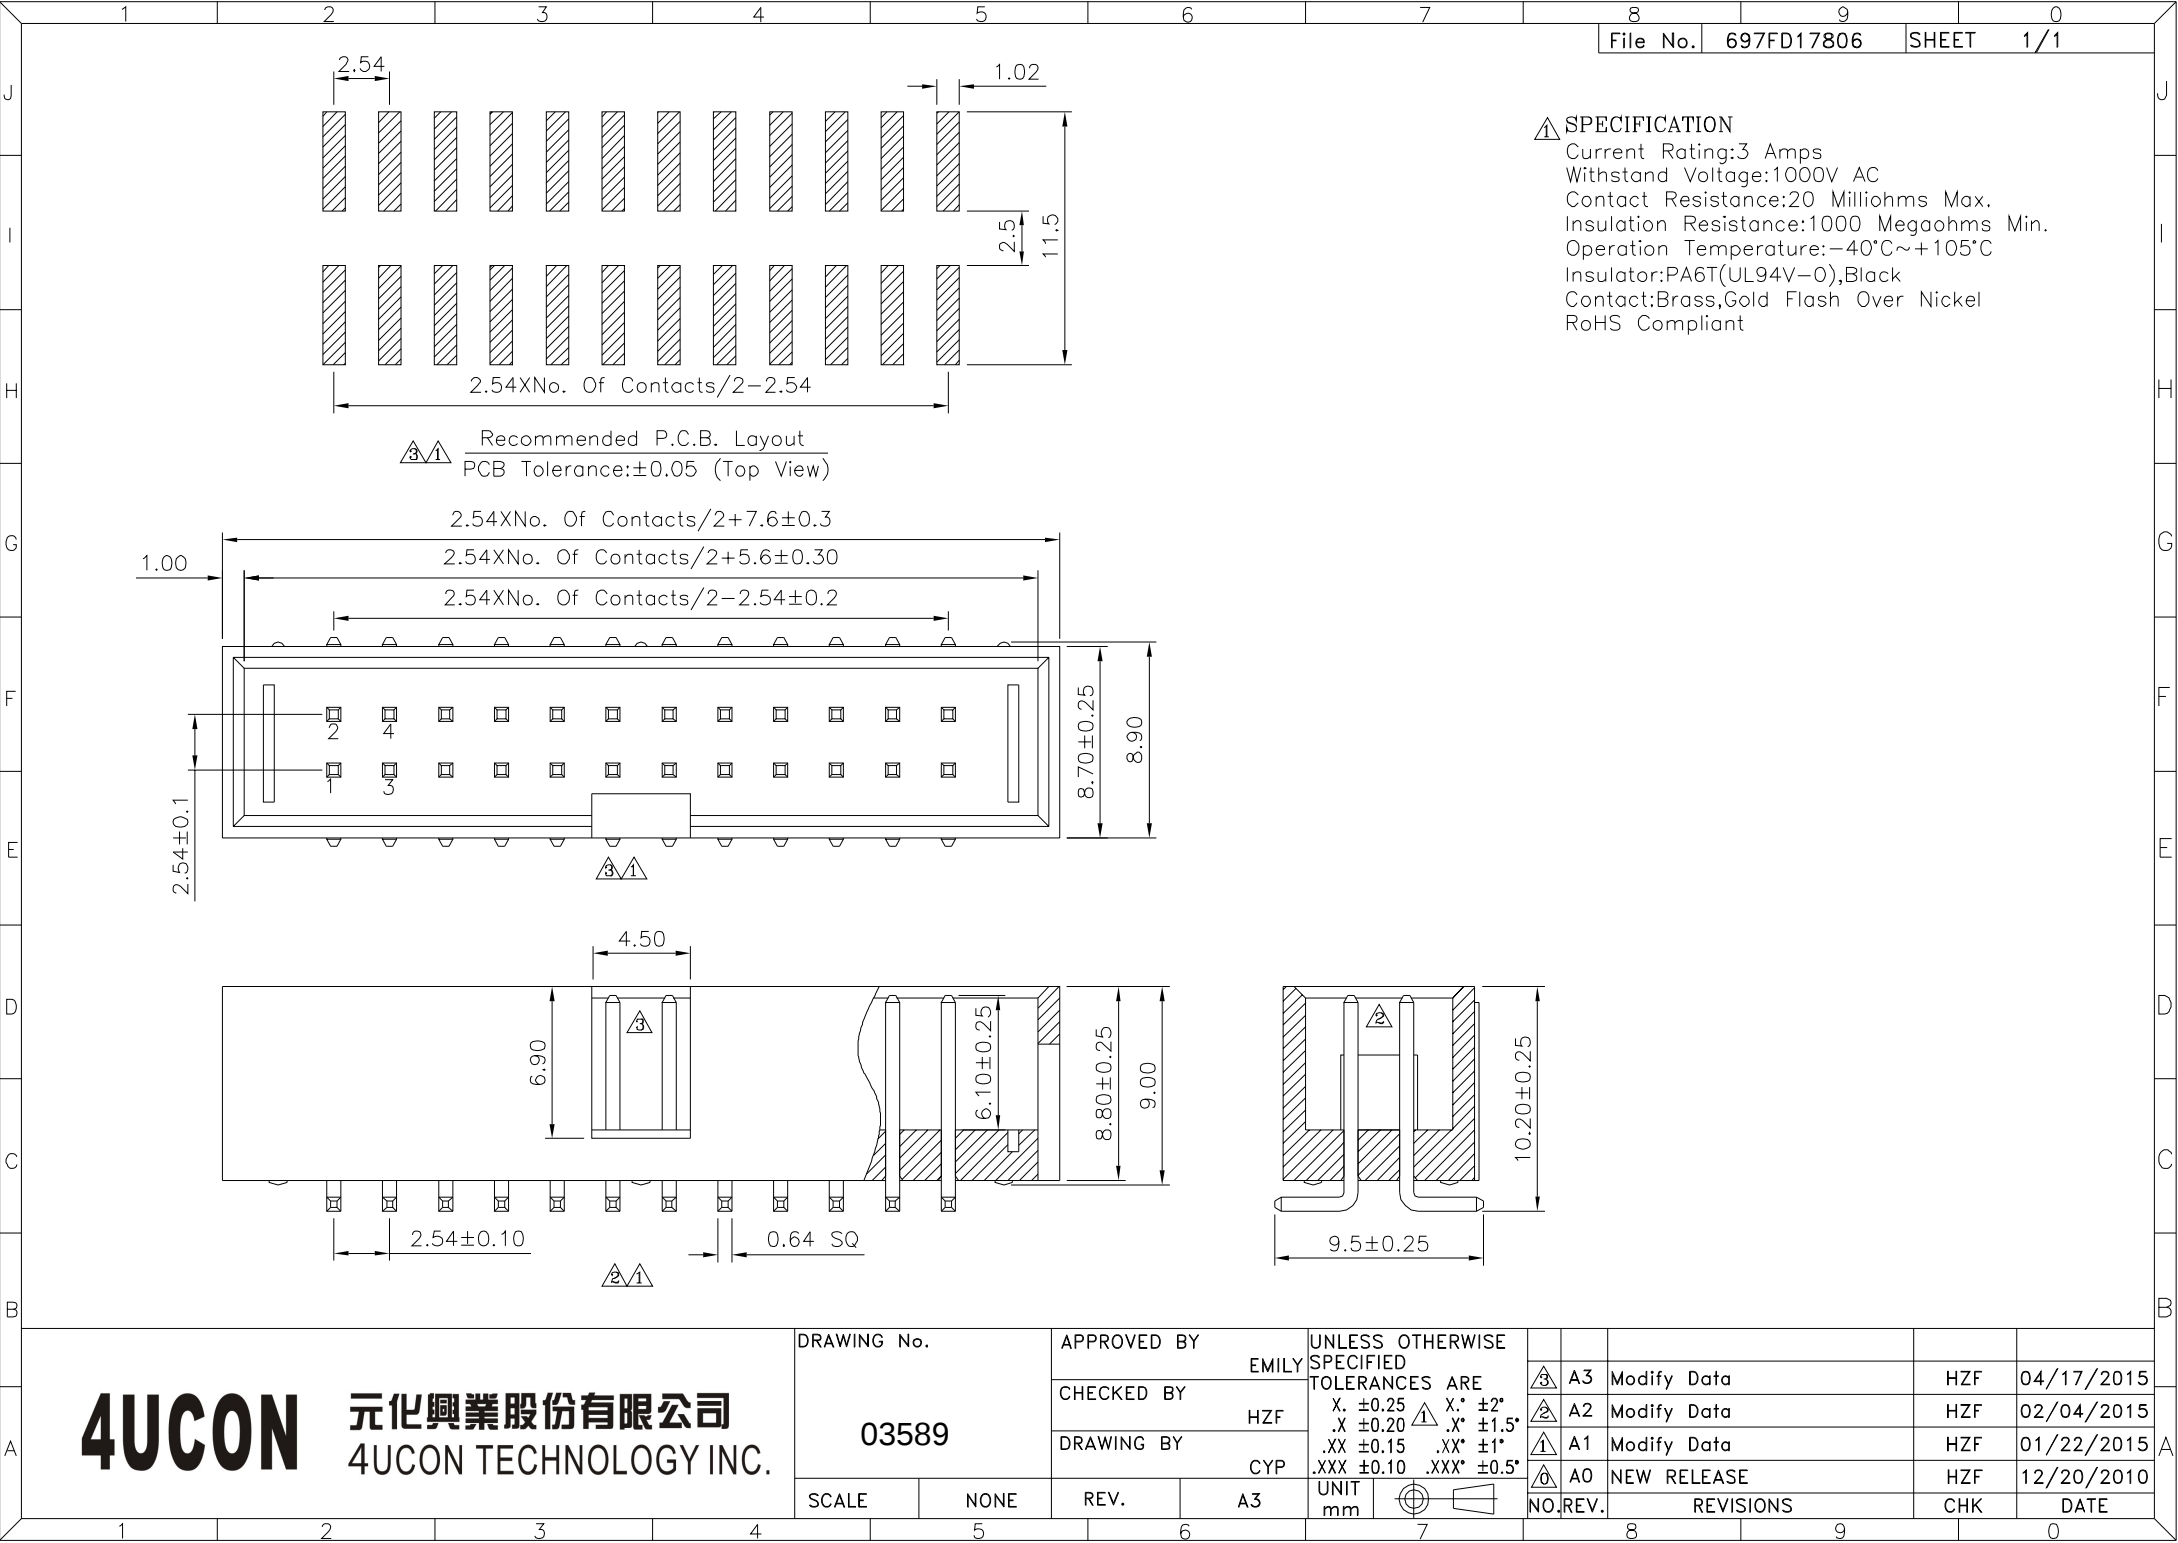

△ SPECIFICATION
Current Rating:3 Amps
Withstand Voltage:1000V AC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Insulator:PA6T(UL94V-0),Black
Contact:Brass,Gold Flash Over Nickel
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY	
		EMILY	
		CHECKED BY	
03589		HZF	
		DRAWING BY	
		CYP	
SCALE	NONE	REV.	A3

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE					
X. ± 0.25	$\triangle$ X.* $\pm 2^\circ$	$\triangle$ A3	Modify Data	HZF	04/17/2015
.X ± 0.20	.X* $\pm 1.5^\circ$	$\triangle$ A2	Modify Data	HZF	02/04/2015
.XX ± 0.15	.XX* $\pm 1^\circ$	$\triangle$ A1	Modify Data	HZF	01/22/2015
.XXX ± 0.10	.XXX* $\pm 0.5^\circ$	$\triangle$ A0	NEW RELEASE	HZF	12/20/2010
UNIT					
mm		NO.	REV.	REVISIONS	CHK
					DATE