

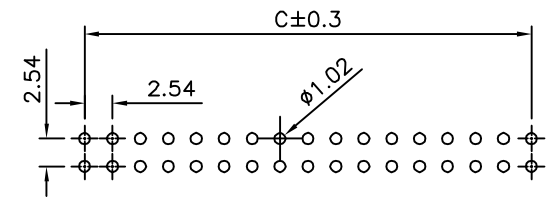
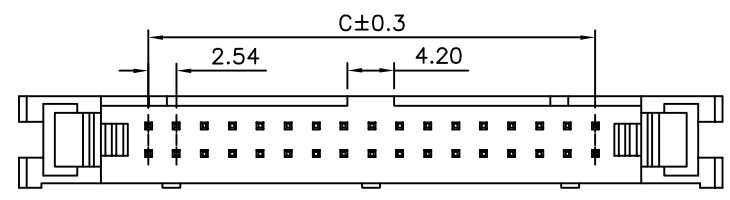
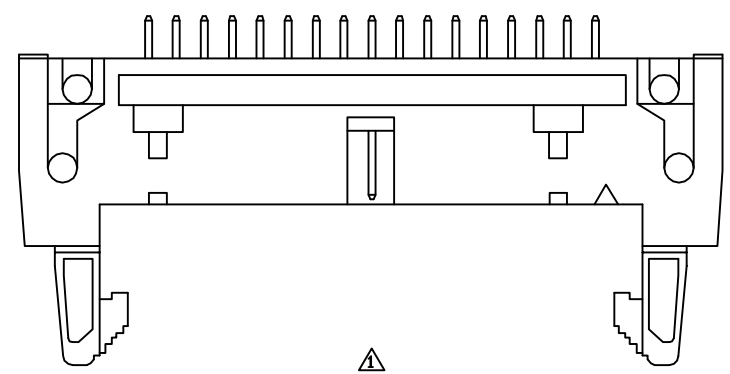



**△ SPECIFICATION**  
 Current Rating:1.5 Amp  
 Dielectric Withstanding Voltage:500V AC  
 Contact Resistance:10 Milliohms Max.  
 Insulation Resistance:1000 Megaohms Min.  
 Operation Temperature:-40°C~+105°C  
 Housing:PBT(UL94V-0),Black  
 Contact:Brass,Gold Flash Over Nickel  
 RoHS Compliant

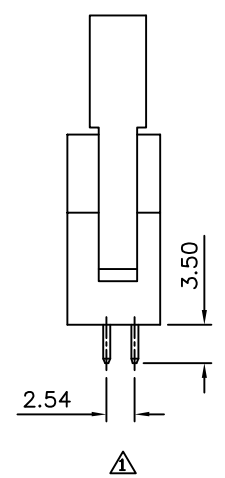

△ Recommended P.C.B. Layout

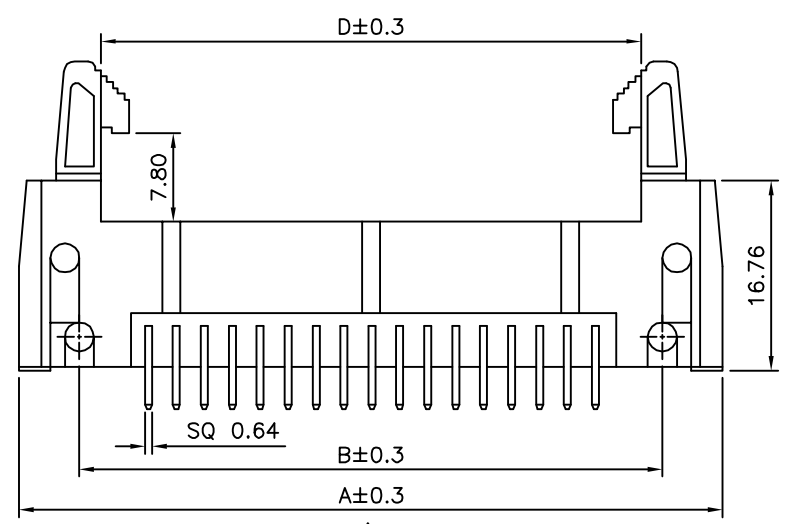

△ New Ejector

△

Pin	A	B	C	D
10	32.00	21.84	10.16	17.96
14	37.08	26.92	15.24	23.04
16	39.62	29.46	17.78	25.58
20	44.70	34.54	22.86	30.33
24	49.78	39.62	27.94	35.74
26	52.32	42.16	30.48	38.28
30	57.40	47.24	35.56	43.36
34	62.48	52.32	40.64	48.44
40	70.10	59.94	48.26	56.06
50	82.80	72.64	60.96	68.76
60	95.50	85.34	73.66	81.46
64	100.58	90.42	78.74	86.54

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No. 03839  
 APPROVED BY EMILY  
 CHECKED BY HZF  
 DRAWING BY CYP  
 SCALE NONE REV. A2  
 UNIT mm

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
 △.X ±0.50 X.\* ±2.0°  
 .XX ±0.20 .X\* ±1.0°  
 .XXX ±0.10 .XX\* ±0.5°

NO.	REV.	REVISIONS	CHK	DATE
△A2		Modify Data	HZF	04/17/2015
△A1		Modify Data	HZF	11/15/2012
△A0		NEW RELEASE		