

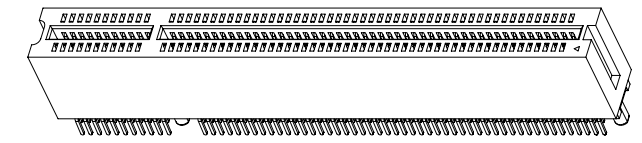
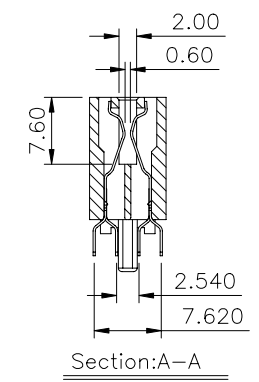

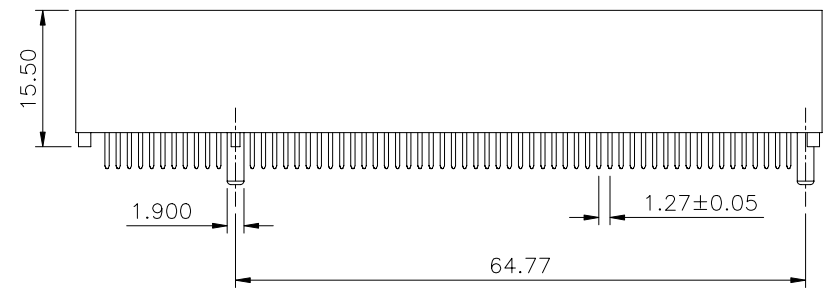


△ SPECIFICATION
 Voltage Rating:250V
 Current Rating:1A
 Contact Resistance Terminal:30 Milliohms Max.
 Dielectric Withstanding Voltage:500V AC/Min
 Insulation Resistance:1000 Megaohms Min.
 Housing:Nylon66, UL94V-0
 Contact:Brass
 Plating:Mating Area:Gold Flash Over Nickel
 Solder Area:Tin Over Nickel
 RoHS Compliant

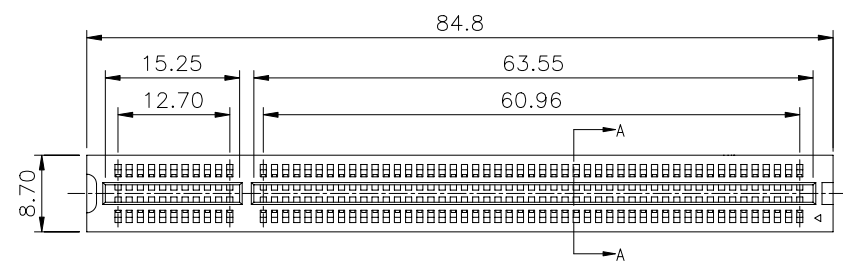

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X.±0.20 .X±0.15 .XX±0.10 .XXX±0.05					
04508		MEI			△3	B3	Modify Dim.	HZF	04/14/2009
		CHECKED BY	HZF		△2	B2	Modify P/N	HZF	04/13/2009
		DRAWING BY	XYH		△1	B1	Modify Specifications	HZF	10/15/2008
SCALE	NONE	REV.	B3	UNIT	mm	NO.REV.	REVISIONS	CHK	DATE