

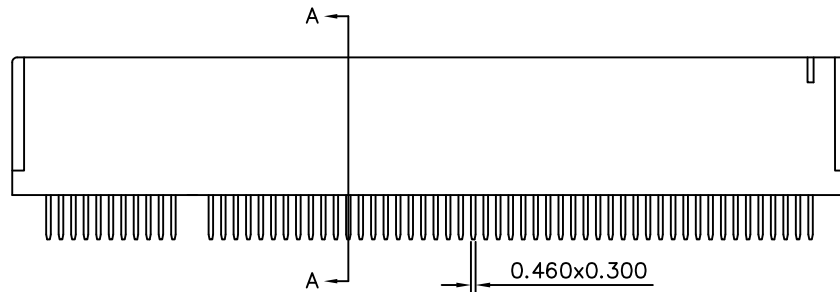


SPECIFICATIONS

Current Rating: 1 Amp
 Voltage Rating: 250V AC RMS
 Withstand Voltage: 500V AC RMS 60Hz For 1 Minute
 Insulation Resistance: 1000 Megohms Min. At 500V DC
 Contact Resistance: 30 Milliohms Max. At 1 Amp DC
 Temperature Range: -55°C To +105°C
 Retention Force: 460 Grams Min. Per Contact
 Insertion Force: 230 Grams Max. Per Contact Pair
 Withdrawal Force: 15 Grams Min. Per Contact Pair
 Insulator: Glass-Reinforced Thermoplastic
 Contact: Copper Alloy
 Finish: Mating-Selected Gold Over Nickel
 Solder Area-Tin Lead Over Nickel

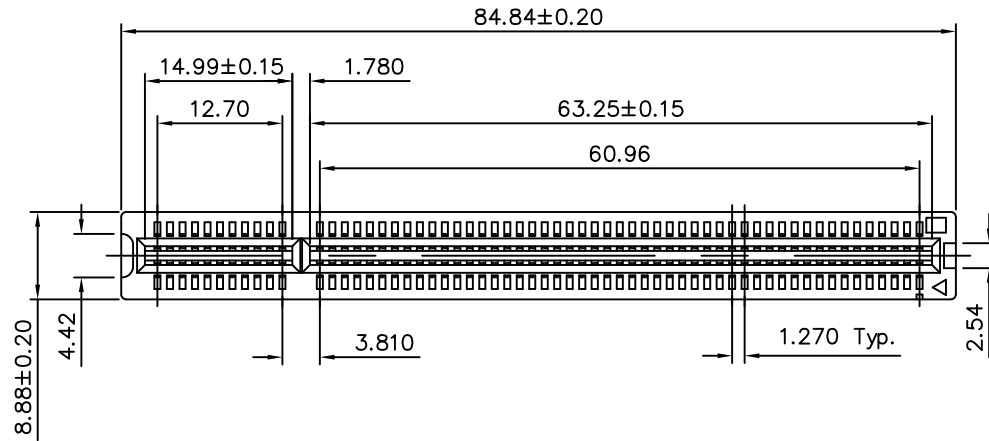

Section A-A

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

04515

APPROVED BY

MEI

CHECKED BY

BECKY

DRAWING BY

TCF


SCALE

NONE

REV.

A1

UNIT
mm



UNLESS OTHERWISE SPECIFIED

TOLERANCES ARE

.X ±0.15

.XX ±0.10

.XXX ±0.05

△ A1

Add Dim.: 1.0~1.6

BECKY

07/04/2006

△ A0

NEW RELEASE

MEI

NO. REV.

REVISIONS

CHK

DATE