
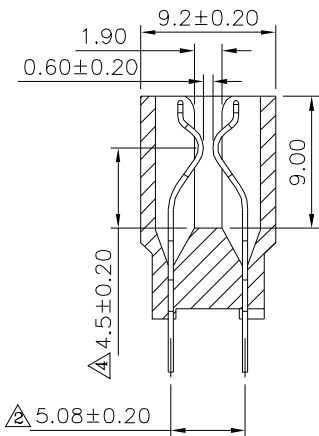
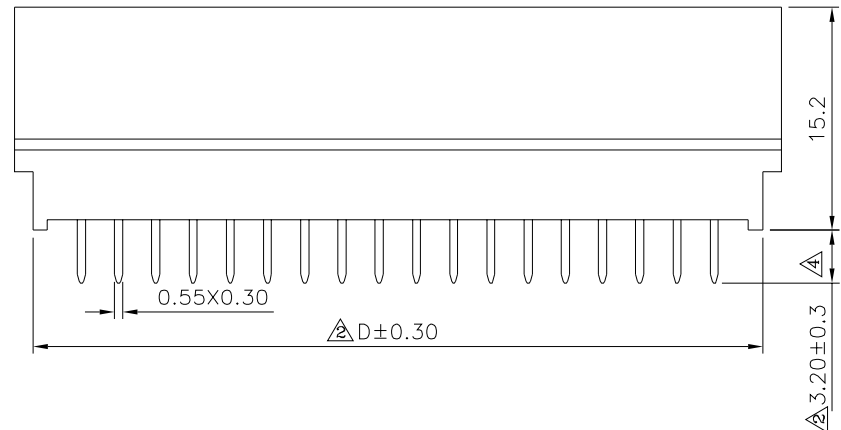
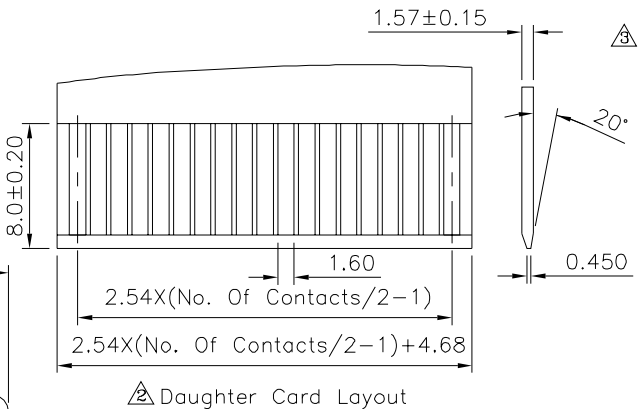


SPECIFICATION

Current Rating:3A
Dielectric Withstanding Voltage:1000V AC/Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:5000 Megaohms Min. At 500V DC
Operation Temperature:-55°C~+85°C
Insertion Force:340g Max. Per Pair
Withdrawal Force:28g Min. Per Pair
Insulator:PBT+G.F.(UL94V-0)
Contact:Brass,Gold Plated On Contact Area,
Tin Plated On Solder Tails,Over Nickel
RoHS Compliant

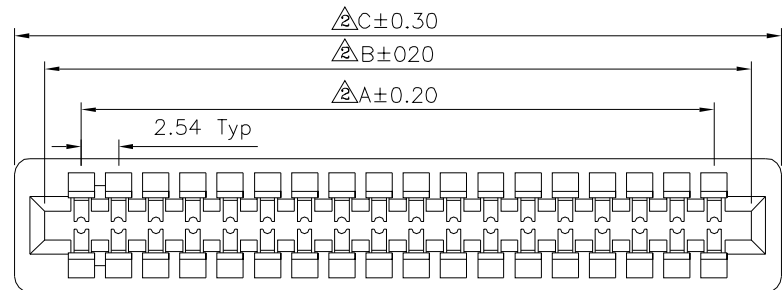

Pin	A	B	C	D	Pin	A	B	C	D
06	5.08	10.16	14.22	12.12	44	53.34	58.42	62.48	60.38
08	7.62	12.70	16.76	14.66	46	55.88	60.96	65.02	62.92
10	10.16	15.24	19.30	17.20	48	58.42	63.50	67.56	65.46
12	12.70	17.78	21.84	19.74	50	60.96	66.04	70.10	68.00
14	15.24	20.32	24.38	22.28	52	63.50	68.58	72.64	70.54
16	17.78	22.86	26.92	24.82	54	66.04	71.12	75.18	73.08
18	20.32	25.40	29.46	27.36	56	68.58	73.66	77.72	75.62
20	22.86	27.94	32.00	29.90	58	71.12	76.20	80.26	78.16
22	25.40	30.48	34.54	32.44	60	73.66	78.74	82.80	80.70
24	27.94	33.02	37.08	34.98	62	76.20	81.28	85.34	83.34
26	30.48	35.56	39.62	37.52	64	78.74	83.82	87.88	85.78
28	33.02	38.10	42.16	40.06	66	81.28	86.36	90.42	88.32
30	35.56	40.64	44.70	42.60	68	83.82	88.90	92.96	90.86
32	38.10	43.18	47.24	45.14	70	86.36	91.44	95.50	93.40
34	40.64	45.72	49.78	47.68	72	88.90	93.98	98.04	95.94
36	43.18	48.26	52.32	50.22	80	99.06	104.14	108.20	106.10
38	45.72	50.80	54.86	52.76	86	106.68	111.76	115.82	113.72
40	48.26	53.34	57.40	55.30	92	114.30	119.38	123.44	121.34
42	50.80	55.88	59.94	57.84	98	121.92	127.00	131.06	128.96
					100	124.46	129.54	133.60	131.50

4UCON

元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

04594

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY


HAO

REV.

A4

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ± 0.38
.XX ± 0.25
ANG.

UNIT
mm



A4

Modify Data

HZF

06/13/2020

A3

Modify Data

HZF

01/19/2015

A2

Modify Data

HZF

12/15/2014

A1

Modify Data

HZF

12/26/2012

A0

NEW RELEASE

HZF

06/05/2012

NO. REV.

REVISIONS

CHK

DATE