

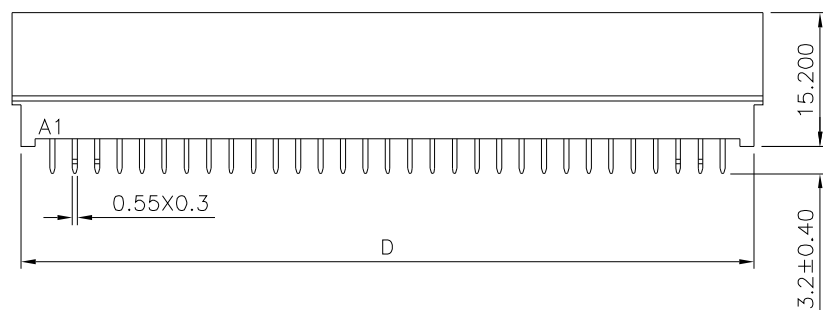
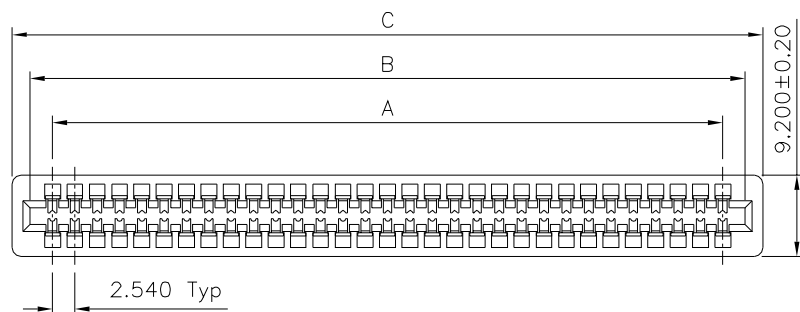


Recommended P.C.B. Layout

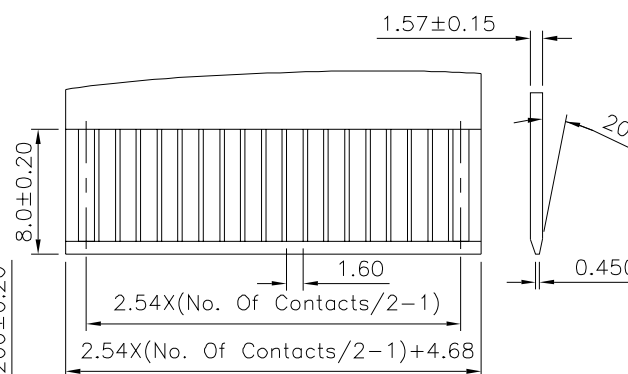

Daughter Card Layout

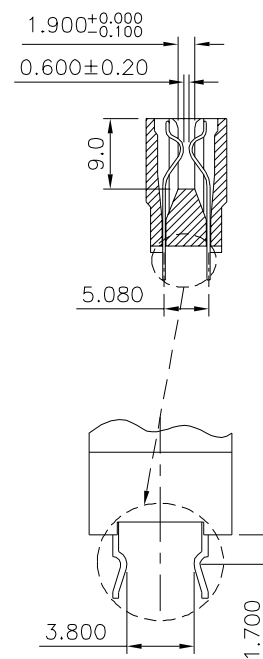

Detail Of Kinked

SPECIFICATION

Current Rating:3 Amp
Dielectric Withstanding Voltage:1000V AC RMS
Contact Resistance:20 Milliohms Max.
Insulation Resistance:5000 Megaohms Min. At 500V DC
Temperature Range:-55°C~+85°C
Insertion Force:340 Grams Max. Per Contact Pair
Withdrawal Force:28 Grams Max. Per Contact Pair
Insulator:PBT+G.F.(UL94V-0)
Contact:Brass,Gold Plated On Contact Area,
Tin Plated On Solder Tails,Over Nickel
RoHS Compliant

Kinded Position:

36 Pin	#A2,#A3,#A16,#A17,#B2.#B3.#B16.#B17
62 Pin	#A3,#A29,#B3,#B29

Pin	A	B	C	D	E
36	43.18±0.20	48.26±0.20	52.32±0.20	50.32±0.20	43.18±0.20
62	76.200±0.20	81.280±0.30	85.340±0.30	83.340±0.30	76.200±0.0

4U CON 元化興業股份有限公司
4U CON TECHNOLOGY INC.

DRAWING No.

04597

SCALE	NONE
-------	------

NONE

APPROVED BY

EMILY

CHECKED BY

	HZF
--	-----

DRAWING BY CXB

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
0~10	±0.2
10~30	±0.3
30~100	±0.4
100~300	±0.5
ANG.	±0.5°

UNIT	
------	---

	CO
NO	REV

NEW RELEASE	
	REVISIONS

HZF	05/04/2021
CHK	DATE