



SPECIFICATION



Current Rating:3A
 Dielectric Withstanding Voltage:1000V AC RMS
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:
 5000 Megaohms Min. At 500V DC
 Operation Temperature:-55°C~+105°C
 Insertion Force:340g Max. Per Contact Pair
 Withdrawal Force:28g Min. Per Contact Pair
 △ Contact:Copper Alloy
 Mating Area:Gold Flash Over Nickel
 Solder Area:Tin Plated Over Nickel
 Insulator:PBT+G.F.(UL94V-0)
 RoHS Compliant

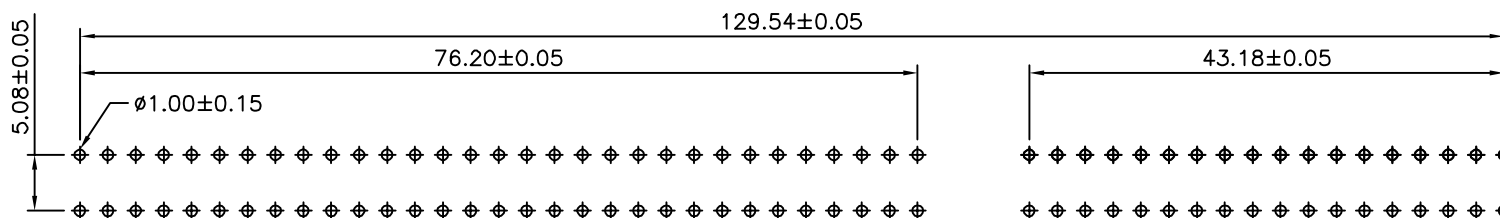

Recommended P.C.B. Layout

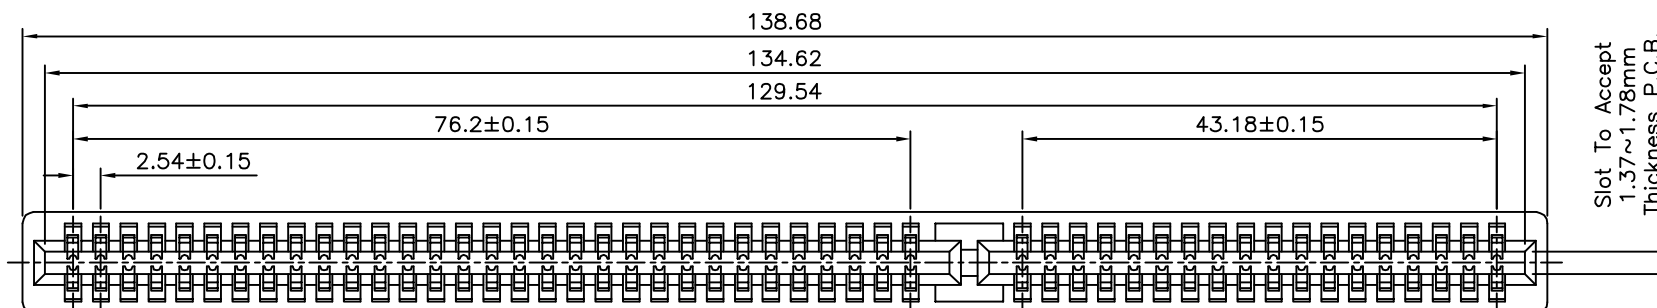

Slot To Accept
 1.37~1.78mm
 Thickness P.C.B.

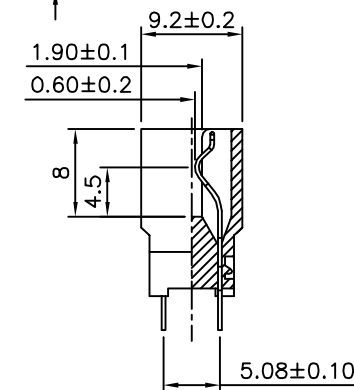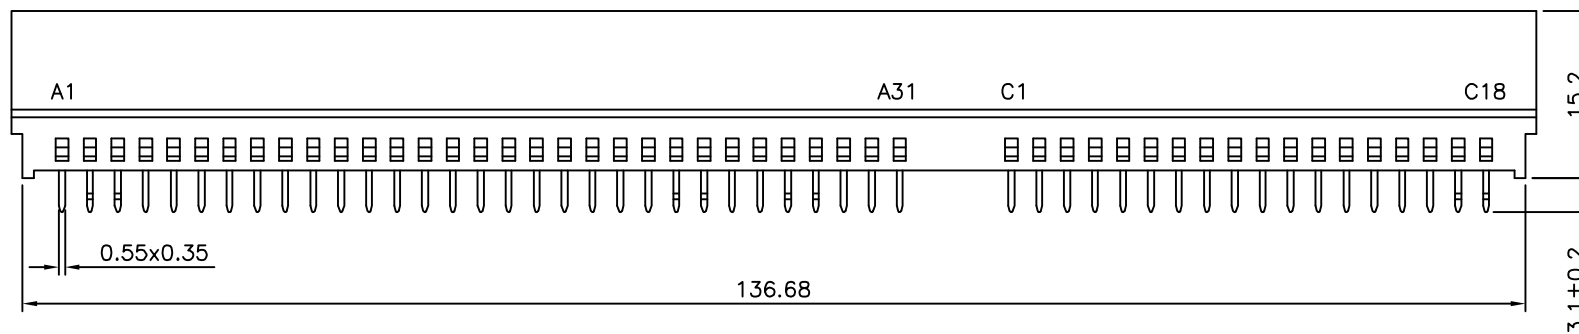

Kinked Position Are#A2,#A3,#A23,#A24,#A27,#A28,#C17&#C18
 And #B2,#B3,#B23,#B24,#B27,#B28,#D17&#D18

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

04604

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

QQJ

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 .X ±0.38
 .XX ±0.25
 ANG.


SCALE

NONE

REV.

A1

UNIT
 mm



NO. REV.

A1 Modify Spec.

A0 NEW RELEASE

REVISIONS

CHK

DATE

A