
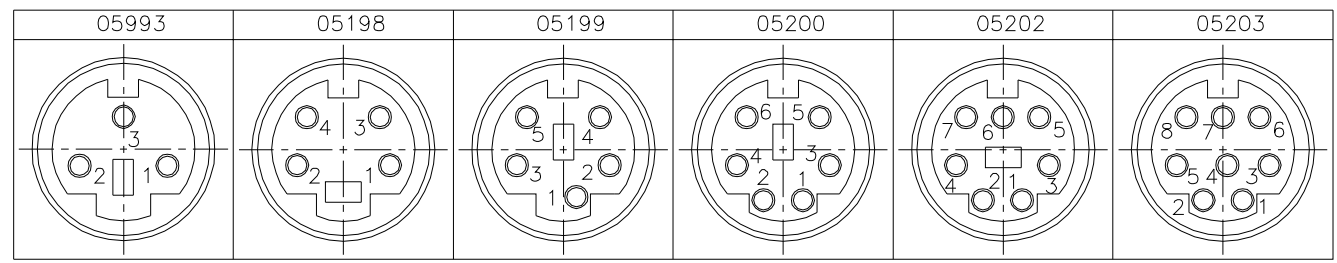
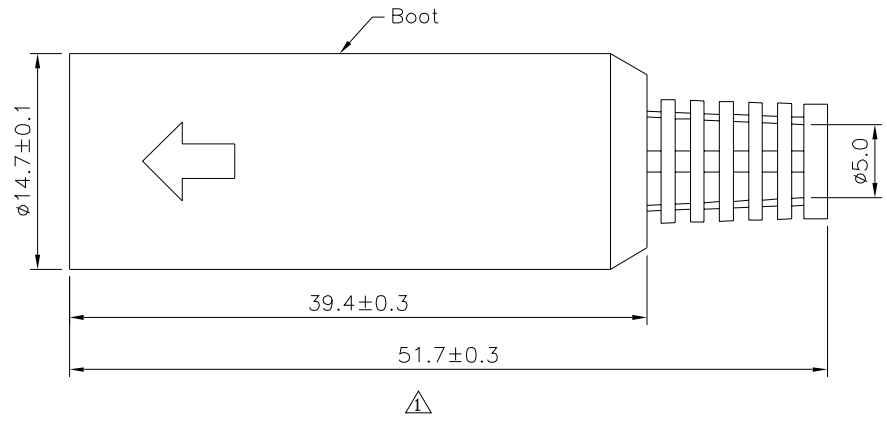


△ SPECIFICATION
 Rating:100V AC 1A Max. Or 12V DC 2A Max.
 Dielectric Strength:250V AC At 1 Minute
 Contact Resistance:30 Milliohms Max.
 Insulation Resistance:50 Megaohms Min. At 250V DC
 Operation Temperature:-20°C~+105°C
 Insertion Force:4.5Kg Max.
 Withdrawal Force:0.9Kg~3Kg
 △ Boot:EVA+PE(2L)
 △ Middle Hood:ABS(PH-88)
 △ Metal Shell:Copper,Nickel Plated
 △ Insulator:PA6+G.F.
 △ Pin Contact:Brass,Silver Plated
 RoHS Compliant

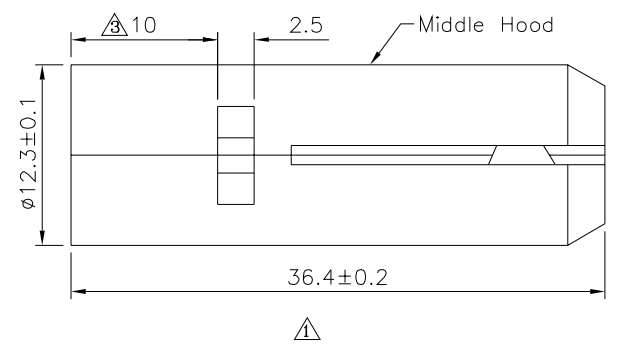

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE △ .X ±0.1 .XX ±0.05 ANG. UNIT mm
05198		MEI		
		CHECKED BY	HZF	
SCALE	NONE	DRAWING BY	CYP	
		REV.	A3	

NO.	REV.	REVISIONS	CHK	DATE
3	A3	Modify Data	HZF	03/07/2018
2	A2	Modify Data	HZF	06/11/2014
1	A1	Modify Data	HZF	03/18/2010
0	A0	NEW RELEASE	HZF	