
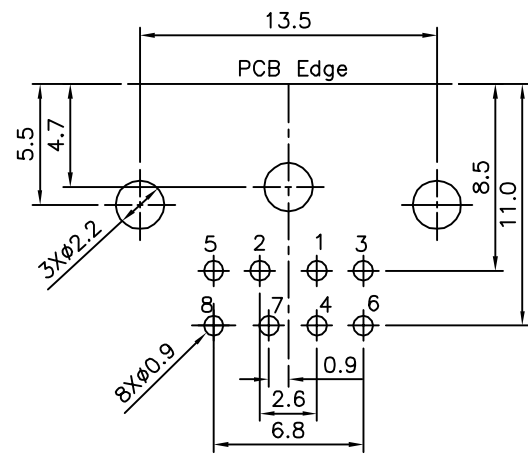


△ SPECIFICATION
 Voltage And Current Rating:DC 12V,2A Max.
 AC 100V,1A Max.
 Withstand Voltage:250V AC For 1 Minute
 Contact Resistance:30 Milliohms Max.
 Insulation Resistance:100 Megaohms Min.
 At 500V DC
 Insertion Force:4.0Kg Max.
 Extraction Force:0.9Kg Min.
 Durability(Life Test):100 Cycles
 RoHS Compliant

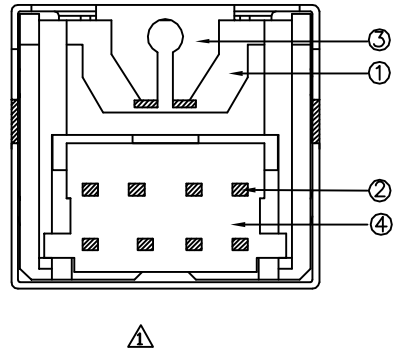

Recommended P.C.B. Layout(Bottom View)

④	Bottom Cover	1	PBT+G.F.	Black
③	Shield	1	Brass	Tin Plated
②	Contact	8	Phosphor Bronze	Gold Plated On Contact Area Tin Plated On Solder Tail, Under Nickel
①	Housing	1	PBT+G.F.	Black
No.	Description	Q'ty	Material	Remark

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X ±0.38 .X ±0.25 .XX ±0.13 .XXX ±0.05
05222		EMILY		
		CHECKED BY		
		HZF		
		DRAWING BY		
		WSS		
SCALE	NONE	REV.	A1	UNIT
				mm

△ A1	Modify Data	HZF	05/16/2011	
△ A0	NEW RELEASE			
NO.	REV.	REVISIONS	CHK	DATE