


**△ SPECIFICATION**

Contact Resistance: 30 Milliohms Max.  
 Insulation Resistance: 100 Megaohms Min. At 500V DC  
 Rated Voltage And Current: DC 12V 2A Max., AC 100V 1A Max.  
 Withstand Voltage: 250V AC For 1 Minute  
 Durability: 100 Cycles  
 Insertion Force: 4.0Kg Max.  
 Extraction Force: 0.9Kg Min.  
 RoHS Compliant

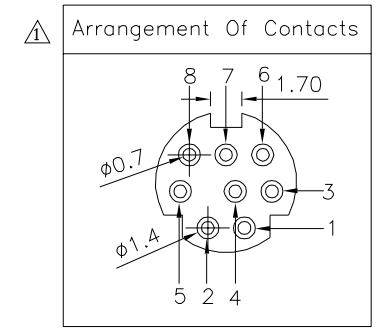

⑤	Spring Shield	Stainless		1
④	Bottom Cover	PBT+G.F.	Black	1
③	Shield	Brass	Tin Plated	1
②	Contact	Phosphor Bronze	Gold Flash On Contact Area, Tin Plated On Solder Tails, Over Nickel	8
①	Housing	PBT+G.F.	Black	1
No.	Name	Material	Finish	Q'ty

△ Recommended P.C.B. Layout (Bottom View)

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No. △ 05223  
 APPROVED BY MEI  
 CHECKED BY HZF  
 DRAWING BY CYP  
 SCALE NONE REV. A1

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
 △ X. ±0.38  
 .X ±0.25  
 .XX ±0.13  
 .XXX ±0.05  
 UNIT mm

△ A1	Modify Data	HZF	12/15/2016	
△ A0	NEW RELEASE			
NO.	REV.	REVISIONS	CHK	DATE