
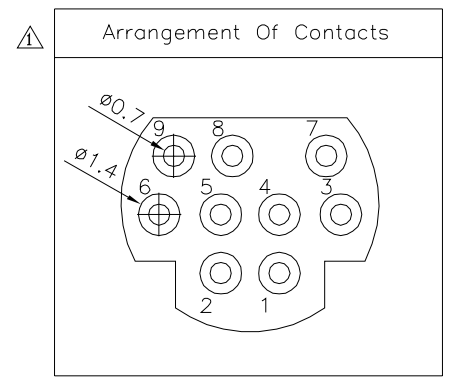
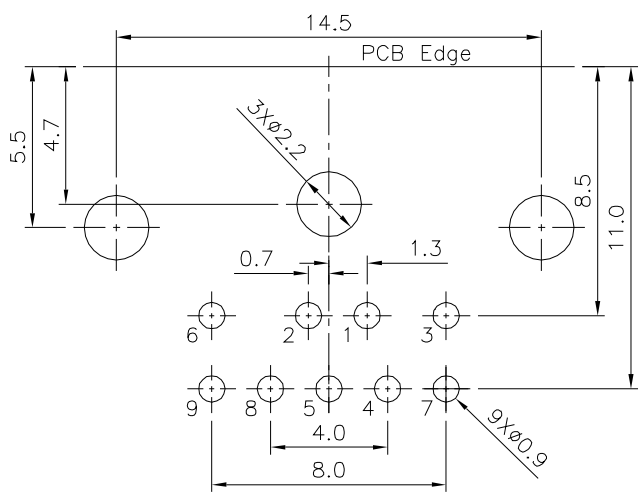


△ SPECIFICATION
 Contact Resistance: 30 Milliohms Max.
 Insulation Resistance: 100 Megohms Min. At 500V DC
 Rated Voltage And Current: DC 12V 2A Max., AC 100V 1A Max.
 Withstand Voltage: 250V AC For 1 Minute
 Durability: 100 Cycles
 Insertion Force: 4.0Kg Max.
 Extraction Force: 0.9Kg Min.
 RoHS Compliant

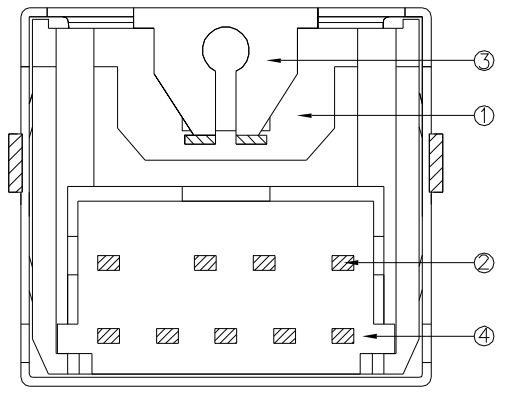

No.	Name	Material	Finish	Q'ty
④	Bottom Cover	PBT+G.F.	Black	1
③	Shield	Brass	Tin Plated	1
②	Contact	Phosphor Bronze	Gold Flash On Contact Area, Tin Plated On Solder Tails, Over Nickel	9
①	Housing	PBT+G.F.	Black	1

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY	
05224		MEI	
		CHECKED BY	
		HZF	
DRAWING BY		SONG	
SCALE	NONE	REV.	A1

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE																		
X. ±0.38																		
△ .X ±0.25																		
.XX ±0.13																		
.XXX ±0.05																		
UNIT	mm																	
<table border="1"> <tr> <th>NO.</th> <th>REV.</th> <th>REVISIONS</th> <th>CHK</th> <th>DATE</th> </tr> <tr> <td>△ A1</td> <td></td> <td>Modify Data</td> <td>HZF</td> <td>02/21/2014</td> </tr> <tr> <td>△ A0</td> <td></td> <td>NEW RELEASE</td> <td>HZF</td> <td>11/10/2006</td> </tr> </table>				NO.	REV.	REVISIONS	CHK	DATE	△ A1		Modify Data	HZF	02/21/2014	△ A0		NEW RELEASE	HZF	11/10/2006
NO.	REV.	REVISIONS	CHK	DATE														
△ A1		Modify Data	HZF	02/21/2014														
△ A0		NEW RELEASE	HZF	11/10/2006														