
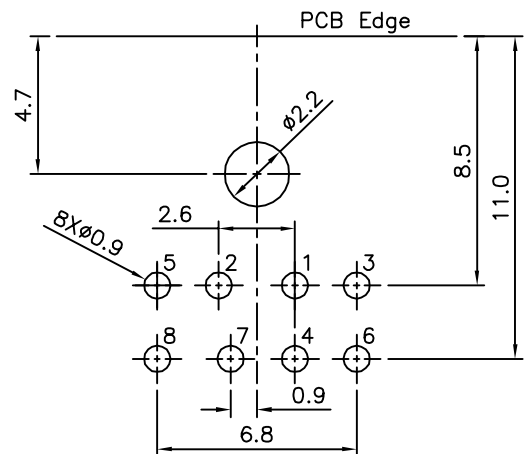
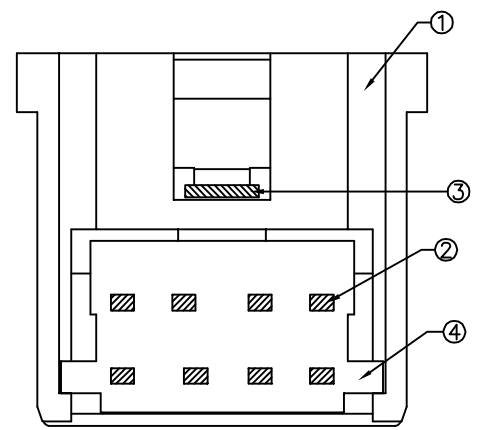


△ SPECIFICATION
 Contact Resistance: 30 Milliohms Max.
 Insulation Resistance: 100 Megohms Min. At 500V DC
 Rated Voltage And Current: DC 12V 2A Max., AC 100V 1A Max.
 Withstand Voltage: 250V AC For 1 Minute
 Durability: 100 Cycles
 Insertion Force: 4.0Kg Max.
 Extraction Force: 0.9Kg Min.
 RoHS Compliant

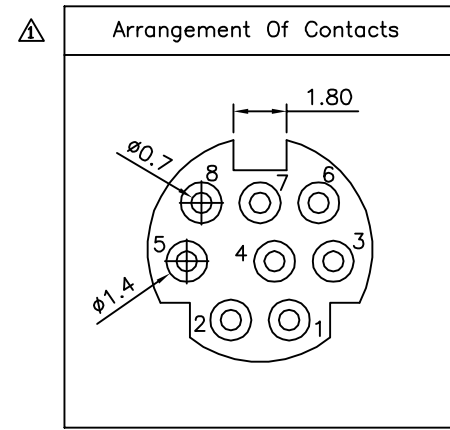

No.	Name	Material	Finish	Q'ty
④	Bottom Cover	PBT+G.F.	Black	1
③	Ground	Brass	Tin Plated	1
②	Contact	Phosphor Bronze	Gold Flash On Contact Area, Tin Plated On Solder Tails, Over Nickel	8
①	Housing	PBT+G.F.	Black	1

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE △ X. ±0.38 .X ±0.25 .XX ±0.13 .XXX ±0.05
05233		EMILY		
		CHECKED BY		
		HZF		
		DRAWING BY		
		SONG		
SCALE	NONE	REV.	A1	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ A1		Modify Data	HZF	10/04/2013
△ A0		NEW RELEASE		