
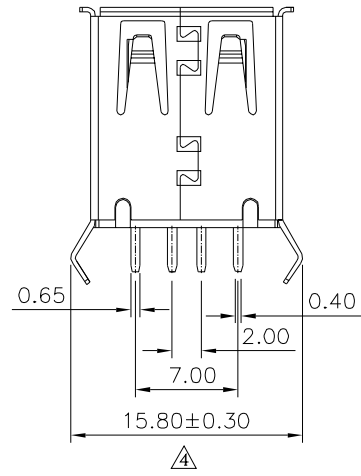
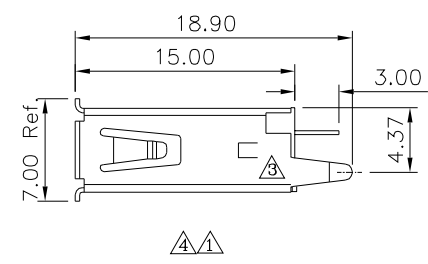


△△ SPECIFICATION
 Current:1.5A Max.
 Voltage:30V Max.
 Withstanding Voltage:500V AC
 Contact Resistance:30 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Temperature Range:-55°C~+85°C
 Mating Force:35N Max.
 Withdrawal Force:10N Min.
 Durability:1500 Cycles Min.
 Contacts:Brass
 Gold Flash On Contact Area,Tin
 Plated On Solder Tails,Over Nickel
△ Insulator/Back Cup:PBT+G.F.(UL94V-0),Black
 Shell:Brass,Nickel Plated Over All
 RoHS Compliant



4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
05240		MEI		
		HZF		
SCALE		REV.		UNIT
NONE		B4		

△	B4	Modify Data	HZF	07/20/2022
△	B3	Modify Data	HZF	08/19/2015
△	B2	Modify Data	HZF	08/11/2014
△	B1	Modify Data	HZF	08/01/2011
△	B0	NEW RELEASE	HZF	06/16/2010
NO.	REV.	REVISIONS	CHK	DATE