
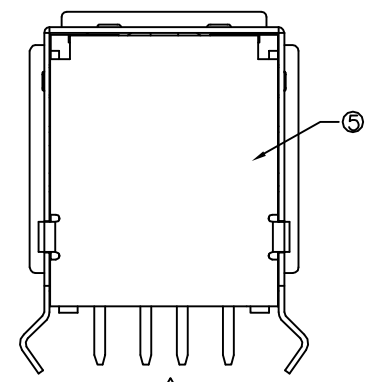
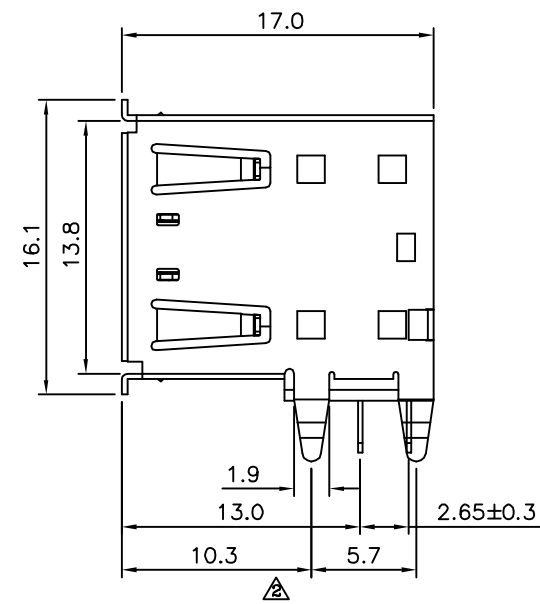


▲ P.C.B. Layout (Bottom View)

▲ SPECIFICATION

Rated Voltage And Current: 1.5A At 250V AC Min.
 Withstand Voltage: 750V AC RMS For 1 Minute (Rev. 1.1)
 Contact Resistance: 30 Milliohms Max.
 Insulation Resistance: 1000 Megaohms Min. At 500V DC
 Operate Temperature: -55°C ~ +85°C
 RoHS Compliant

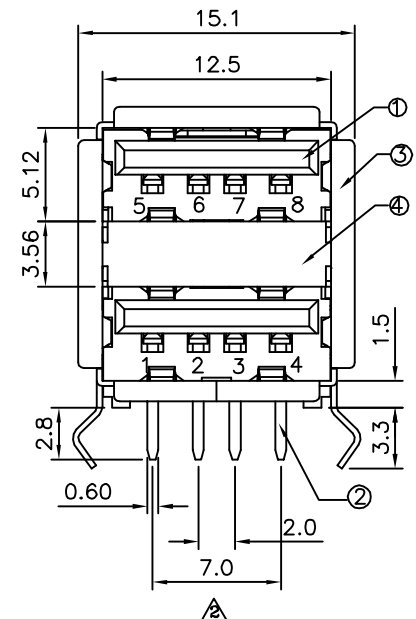

Insulator Color	Item No.
White	05242
Black	05243

No.	Description	Q'ty	Material	Remark
①	Housing	1	PBT+G.F.	---
②	Terminal	8	Phosphor Bronze	Gold Flash On Contact Area, Tin Plated On Solder Tail, Over Nickel
③	Shell	1	Brass	Nickel Plated
④	Spring Clip	1	Brass	Nickel Plated
⑤	Rear Shell	1	Steel	Nickel Plated

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. ▲▲
 05242

APPROVED BY MEI
 CHECKED BY HZF
 DRAWING BY XYH

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 X. ±0.38
 .X ±0.25
 .XX ±0.13
 .XXX ±0.05

SCALE NONE REV. A2 UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
▲	A2	Modify Data	HZF	02/08/2022
▲	A1	Modify Data	HZF	06/12/2009
▲	A0	NEW RELEASE		