
File No.	689QG30802	SHEET	1/1


△4△1△2 SPECIFICATION


Voltage Rating:300V AC
Current Rating:20A/Way Max.
Contact Resistance:20 Milliohms Max.
Withstanding Voltage:2500V AC/Minute
Operation Temperature:−40°C~+105°C
Torque:5.0 Kgf.cm/M3
Wire Range:12~26 AWG
Contacts(Metal Housing):Copper Alloy,Nickel Plated
Terminal Screw:Steel,Galvanized With Cr3+ Plated
Wire Guard:Copper Alloy,Tin Plated
Insulator:Polyamide(UL94V−0),Green
RoHS Compliant

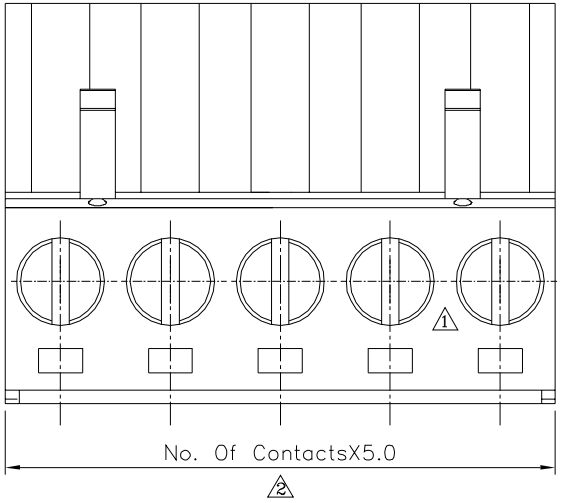

△4

Note	
Length	Tolerance
30mm	±0.30
30~60mm	±0.40
60~120mm	±0.50
120~220mm	±0.60

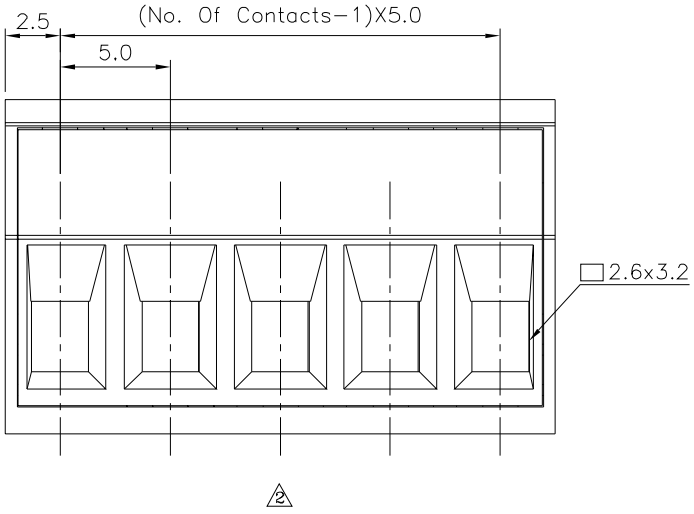

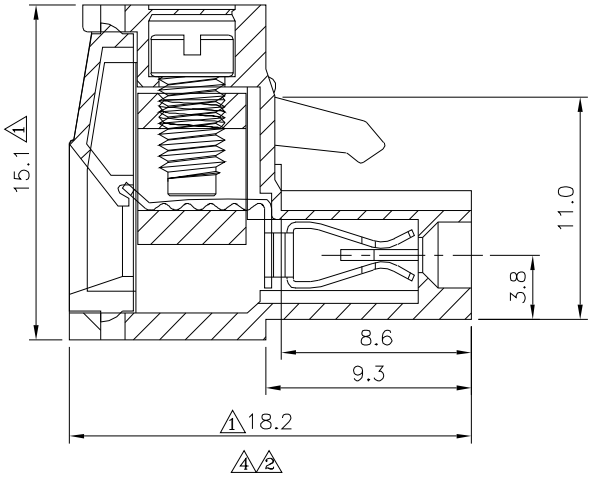

4UCON 元化興業股份有限公司 4UCON TECHNOLOGY INC.	DRAWING No. △1△3	APPROVED BY Jason Wu	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE △4 X. ±0.50 .X ±0.40 .XX ±0.30 ANG. ±1°
	05310	CHECKED BY Leo Han	
		DRAWING BY Michelle Lee	
	SCALE NONE	REV. A4	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△4	A4	Modify Data	HZF	07/30/2026
△3	A3	Modify Data	HZF	06/12/2015
△2	A2	Modify Data	HZF	03/05/2015
△1	A1	Modify Data	HZF	07/13/2010
△0	A0	NEW RELEASE	HZF	05/13/2009