
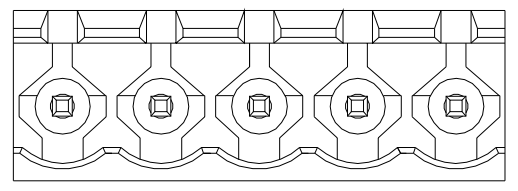
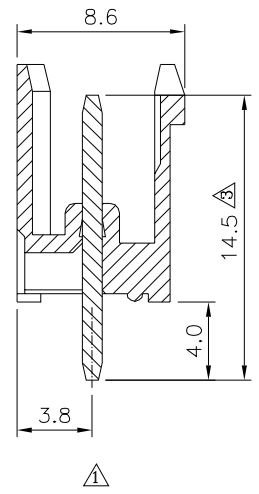


Recommended P.C.B. Layout

**△△ SPECIFICATION**

Voltage Rating:300V AC  
 Current Rating:16A  
 Withstanding Voltage:2500V AC(1 Minute)  
 Using Temperature Range:-40°C~+105°C  
 Solder Pin:Copper Alloy,Tin Plated  
 Insulator Body:Polyamide+G.F.(UL94V-0),Green  
 RoHS Compliant

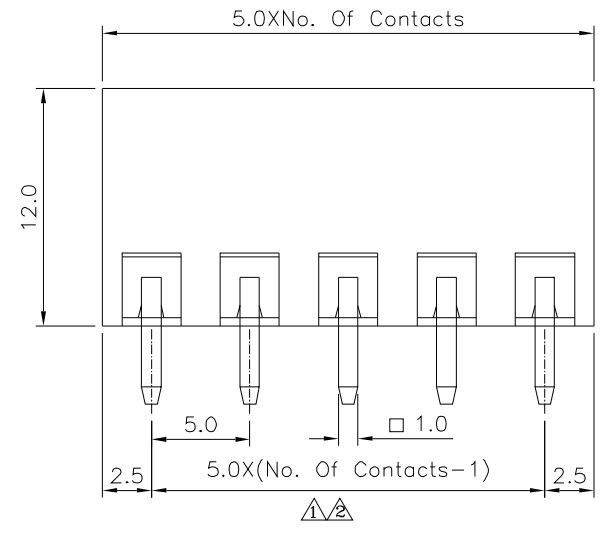

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No. △△		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE △ X. ±0.50 △.X ±0.30 △.XX ±0.20 ANG. ±1°
05316		EMILY		
		CHECKED BY HZF		
SCALE NONE		DRAWING BY HAO		
		REV. A3		

NO.	REV.	REVISIONS	CHK	DATE
△	A3	Modify Data	HZF	10/30/2023
△	A2	Modify Data	HZF	10/24/2015
△	A1	Modify Data	HZF	08/08/2012
△	A0	NEW RELEASE	HZF	08/12/2009

