
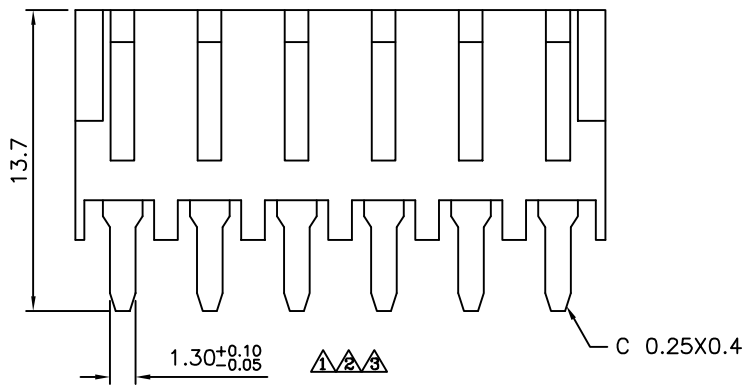
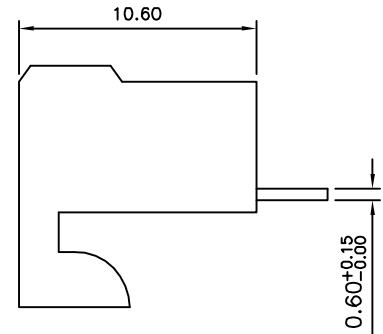


△ Recommended P.C.B. Layout

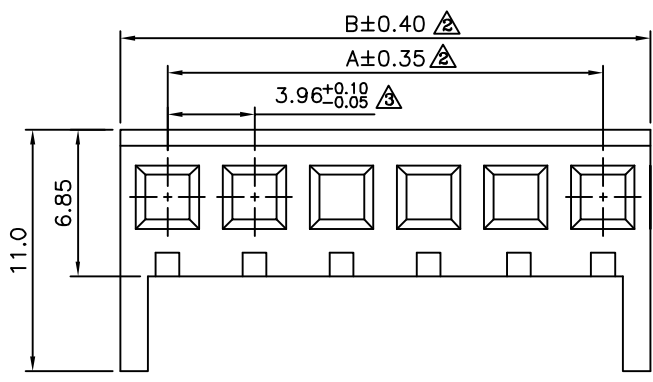

△ SPECIFICATION  
 △ Current:4A Max.  
 Voltage:250V AC Max.  
 Dielectric Withstanding Voltage:1000V AC  
 Contact Resistance:10 Milliohms Max.  
 Insulation Resistance:1000 Megaohms Min.  
 Operating Temperature:0°C~+50°C  
 △ Housing:PA66(UL94V-2),White  
 Contact:Brass,Tin Plated Over Nickel  
 RoHS Compliant

| Pin | A     | B     |
|-----|-------|-------|
| 02  | 3.96  | 8.06  |
| 03  | 7.92  | 12.02 |
| 04  | 11.88 | 15.98 |
| 05  | 15.84 | 19.94 |
| 06  | 19.80 | 23.90 |
| 07  | 23.76 | 27.86 |
| 08  | 27.72 | 31.82 |
| 09  | 31.68 | 35.78 |
| 10  | 35.64 | 39.74 |
| 11  | 39.60 | 43.70 |
| 12  | 43.56 | 47.66 |
| 13  | 47.52 | 51.62 |
| 14  | 51.48 | 55.58 |
| 15  | 55.44 | 59.54 |
| 16  | 59.40 | 63.50 |

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No. 05491  
 APPROVED BY EMILY  
 CHECKED BY HZF  
 DRAWING BY HAO  
 SCALE NONE REV. A3

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
 △ .X ±0.35  
 .XX ±0.10  
 ANG.  
 UNIT mm

| NO.  | REV. | REVISIONS   | CHK | DATE       |
|------|------|-------------|-----|------------|
| △ A3 |      | Modify Data | HZF | 11/07/2014 |
| △ A2 |      | Modify Data | HZF | 08/20/2012 |
| △ A1 |      | Modify Data | HZF | 12/18/2009 |
| △ A0 |      | NEW RELEASE |     |            |