


File No.	613PC20001	SHEET	1/1

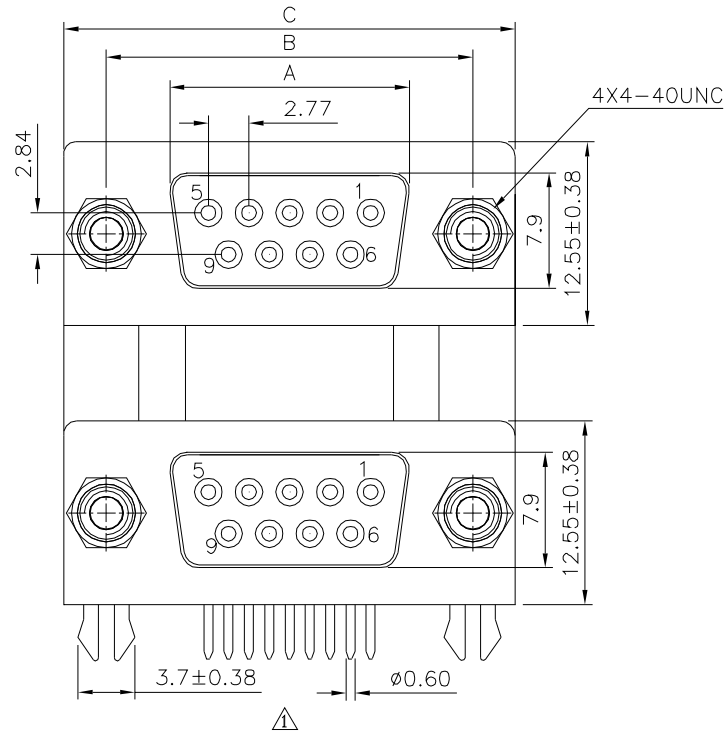


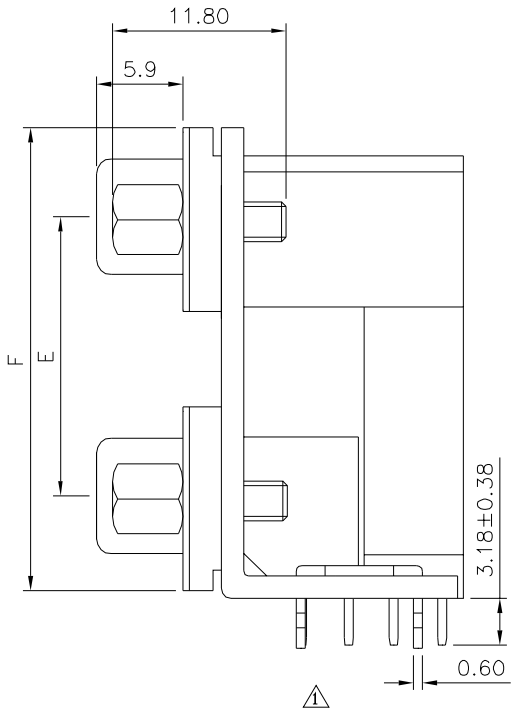

SPECIFICATION

Operation Voltage:250V AC Max.
Current Rating:3A Max.
Dielectric Withstanding Voltage:1000V AC/Minute
Insulation Resistance:1000 Megaohms Min. At 500V DC
Contact Resistance:30 Milliohms Max.
Temperature Range:−55°C~+105°C
Insulator:PBT(UL94V−0)
Contact:Brass
Gold Flash On Contact Area,
Tin Plated On Solder Tails,Over Nickel
Shell:Steel,Nickel Plated
Bracket:Zinc Alloy,Nickel Plated
Rivet Boardlock:Brass,Tin Plated
Screw:Ferroalloy,Nickel Plated
RoHS Compliant

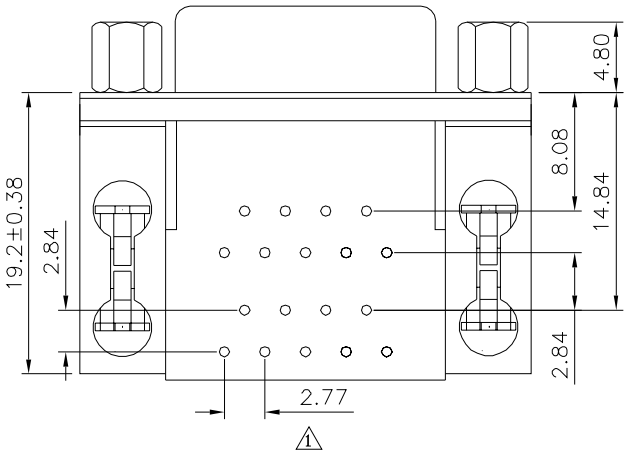

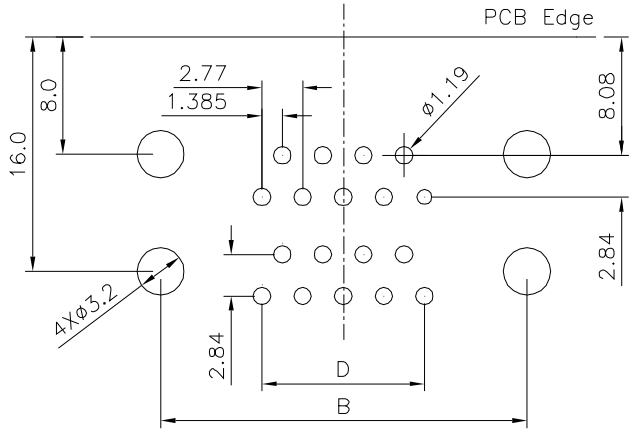

Recommended P.C.B. Layout

Port Spacing Position	E±0.15	F±0.15
15	15.88	28.43
19	19.05	31.60
22	22.86	35.41

Pin	A±0.20	B±0.20	C±0.38	D
0909	16.30	25.00	30.80	11.08
1515	24.60	33.30	39.20	19.39
2525	38.35	47.05	53.05	33.24
3737	54.80	63.50	69.40	49.86

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.	APPROVED BY	CHECKED BY	DRAWING BY
05546	MEI	HZF	CYP

SCALE	NONE	REV.	B1

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
.X ±0.38
.XX ±0.30
.XXX ±0.05
ANG. ±1°
Radius ±0.25
Hole ±0.13
UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
1	B1	Modify Data	HZF	03/20/2025
0	B0	NEW RELEASE	HZF	03/26/2019