






SPECIFICATION

Current Rating:1 Amp
 Dielectric Withstanding Voltage:1000V AC For 1 Minute
 Insulation Resistance:1000 Megaohms Min. At 500V DC
 Contact Resistance:30 Milliohms Max. At 100mA DC
 Operation Temperature:-55°C~+125°C
 Housing:LCP(UL94V-0)
 Contact:Brass

Gold Plated 10u" On Contact Area
 Tin Plated On Solder Tails,Over Nickel
 RoHS Compliant

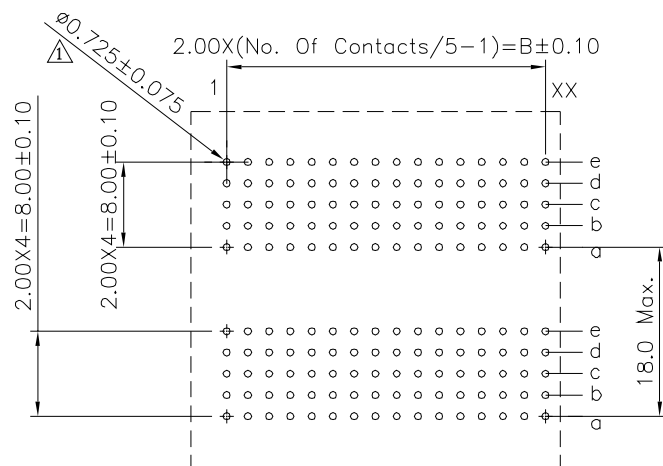

Recommended P.C.B. Layout

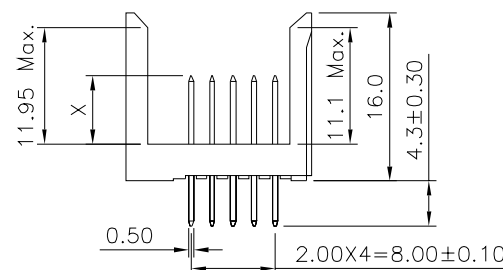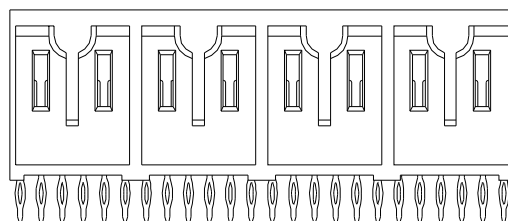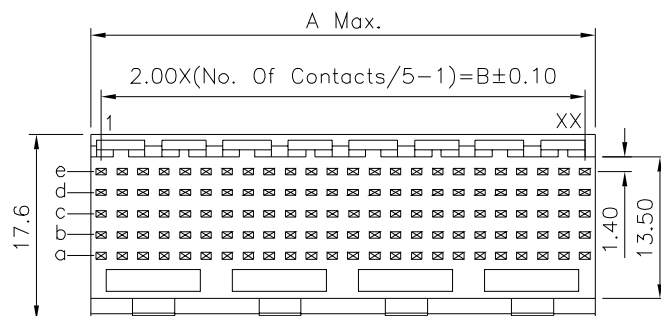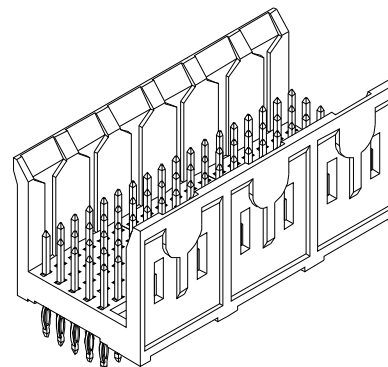

Pin	A	B
30	11.95	10.0
60	23.95	22.0
90	35.95	34.0
120	47.95	46.0
150	59.95	58.0
180	71.95	70.0
210	83.95	82.0
240	95.95	94.0
270	107.95	106.0
300	119.95	118.0
330	131.95	130.0
360	143.95	142.0
390	155.95	154.0

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

05586

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

YBL

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

X. ±0.5
 .X ±0.25
 .XX ±0.15

SCALE

NONE

REV.

A1

UNIT
 mm



NO.

REV.

REVISIONS

CHK

DATE

△ A1 Modify Data HZF 10/15/2013

△ A0 NEW RELEASE HZF 01/02/2009