
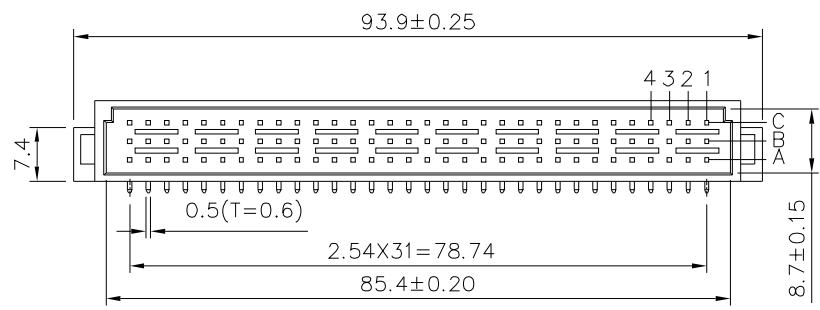



Recommended P.C.B. Layout

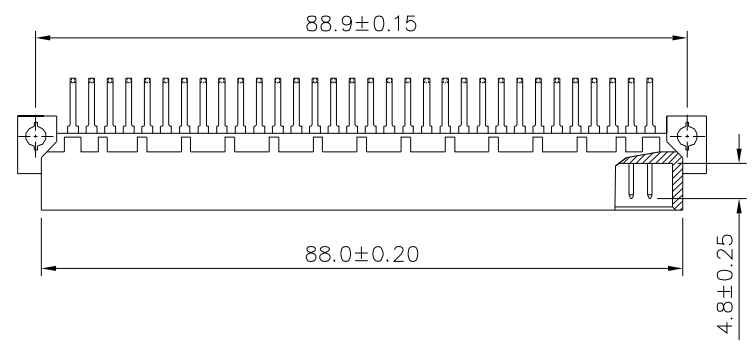

SPECIFICATION

Current Rating:2 Amp
 Dielectric Withstanding Voltage:AC 1000V For 1 Minute
 Insulator Resistance:1000 Megaohms Min. At DC 500V
 Contact Resistance:30 Milliohms Max. At DC 100mA
 Operation Temperature:-55°C~+105°C
 Housing:PBT+30%G.F.(UL94V-0),Gray
 Contact:Brass,Gold Flash On Contact Area,
 Tin Plated On Solder Tails,Over Nickel
 RoHS Compliant

△	Item No.	Pin	Rows With Contacts	Contact Arrange
	05610	96	A+B+C	
	05608	64	A+C	
	05609	48	A+B+C	
	05607	32	A+C	

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
05610		MEI		
		CHECKED BY	HZF	
		DRAWING BY	CYP	.X ±0.15 X.* ±3* .XX ±0.10 .X.* ±2* .XXX ±0.05 .XX.* ±1*
SCALE	NONE	REV.	B1	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△	B1	Modify Data	HZF	05/22/2023
△	B0	NEW RELEASE	HZF	10/13/2022