

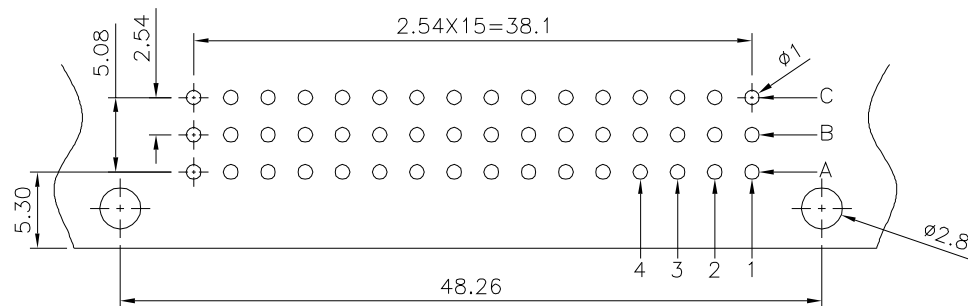
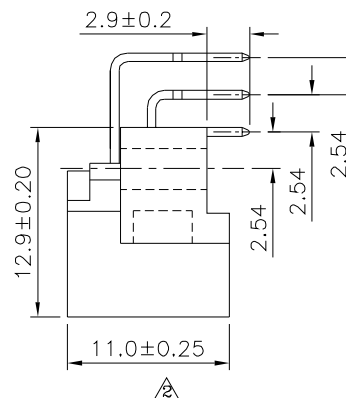


SPECIFICATION

Current Rating:2 Amp
 Withstanding Voltage:1000V AC For 1 Minute
 Contact Resistance:30 Milliohms Max. At 100mA DC
 Insulation Resistance:1000 Megaohms Min. At 500V DC
 Operating Temperature:-55°C~+105°C
 Housing:PBT+30%G.F.(UL94V-0)
 ⚠ Contact:C2680-H,Gold Flash On Contact Area,Tin
 Plated On Solder Tails,Over Nickel
 RoHS Compliant

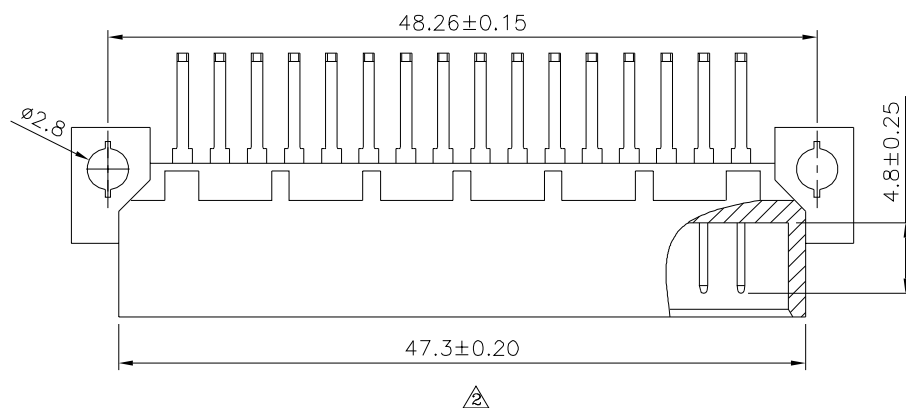

⚠ Recommended P.C.B. Layout

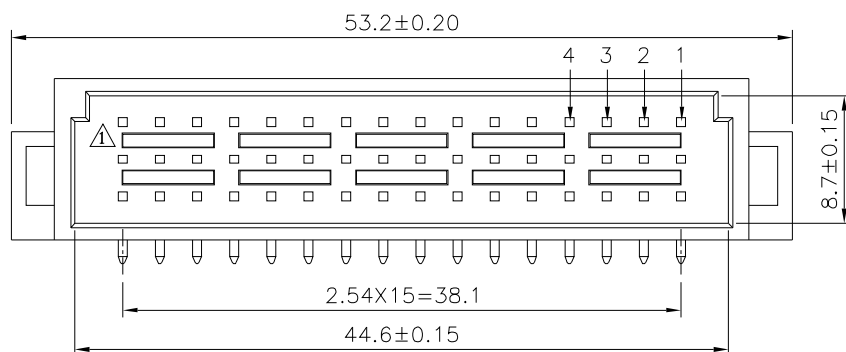

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. ⚠ ⚠

05634

SCALE NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

REV.

A3

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

⚠ .X ±0.15 X.* ±3*
 .XX ±0.10 .X.* ±2*
 .XXX ±0.05 .XX.* ±1*

UNIT

mm



NO.	REV.	REVISIONS	CHK	DATE
⚠	A3	Modify Data	HZF	03/29/2016
⚠	A2	Modify Data	HZF	06/06/2014
⚠	A1	Modify Data	LXX	09/04/2008
⚠	A0	NEW RELEASE	INGRID	06/19/2007