



SPECIFICATIONS:
 Current Rating : 2A
 Dielectric Withstanding Voltage : AC1000V
 For 1 Minute
 Insulation Resistance : 1000Megohms Min.
 At DC 500V
 Contact Resistance : 30 Milliohms At DC 100mA
 Operating Temperature : -55°C To +105°C
 Housing : 30% Glass Filled PBT UL 94V-0
 Contacts : Phosphor Bronze

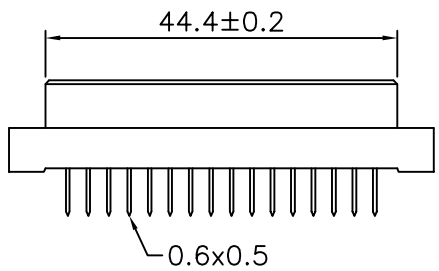

	X Length	1	2	W1	W2
		4.0	2.5	13	17
Pitch	Position	Rows With Contacts		Contact Arrange	
2.54mm	32	a	b		

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. 05648

APPROVED BY MEI
 CHECKED BY RAN
 DRAWING BY HZF

UNLESS OTHERWISE SPECIFIED
 TOLERANCES ARE
 .X ±0.38
 .XX ±0.25
 AWG.

SCALE NONE REV. A UNIT mm

AREA REVISIONS CHK DATE