

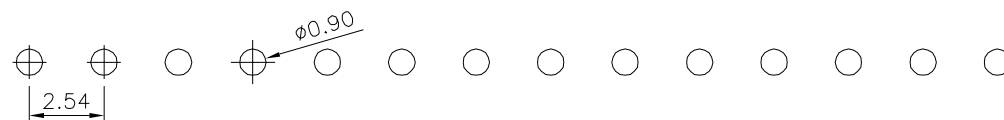

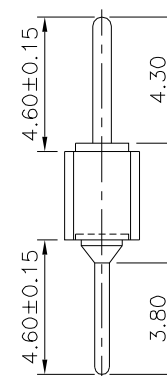


SPECIFICATION

Current Rating: 3 Amps/Contact Max.
 Contact Resistance: 4 Milliohms Max./Contact
 Insulation Resistance: 1000 Megaohms Min. At 100V
 Operating Voltage: 60V AC/DC
 Operating Temperature: -55°C~+105°C
 Pin: Brass, Gold Flash Over All, Over Nickel
 Insulator: PPS(UL94V-0), Black
 RoHS Compliant

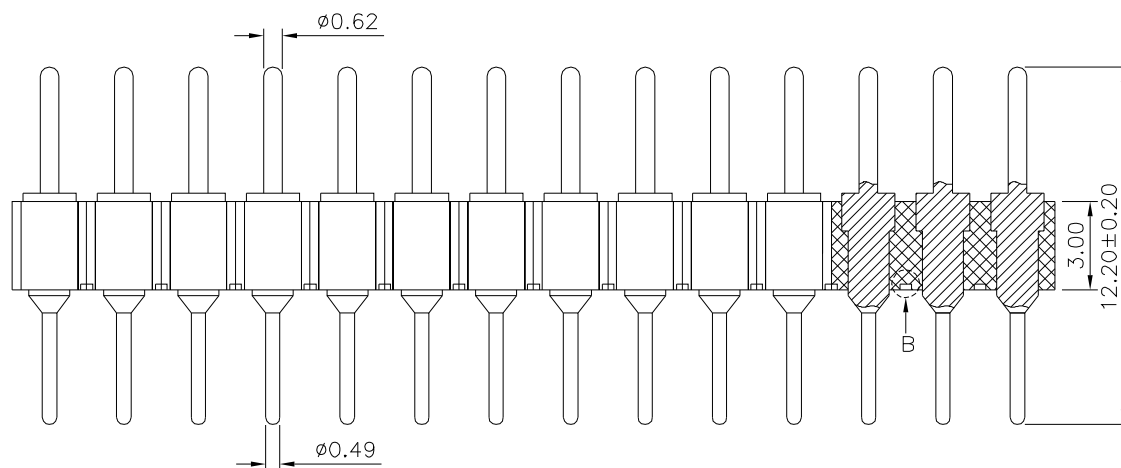

Recommended P.C.B. Layout

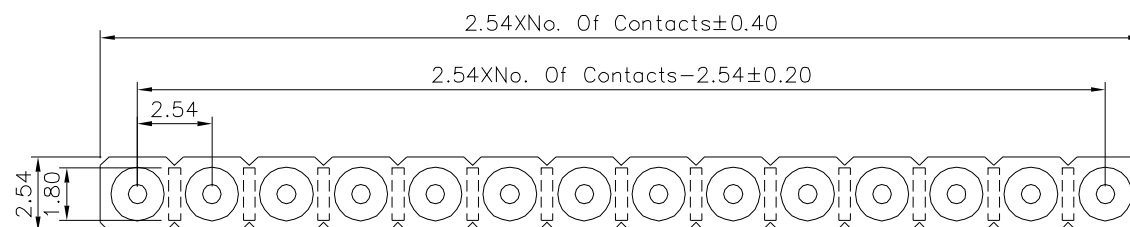

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

05866

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY


HAO

REV.

B0

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 X. ± 0.50
 .X ± 0.30
 .XX ± 0.20
 .XXX ± 0.10
 ANG. $\pm 5^\circ$

UNIT
mm



NO. REV.

NEW RELEASE

REVISIONS

CHK

DATE

BO

NEW RELEASE

REVISIONS

CHK

DATE