

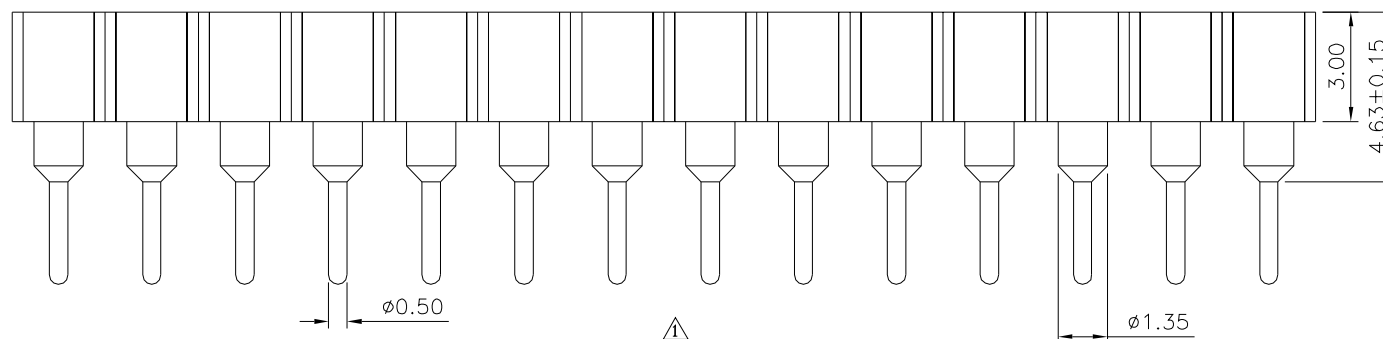


Recommended P.C.B. Layout

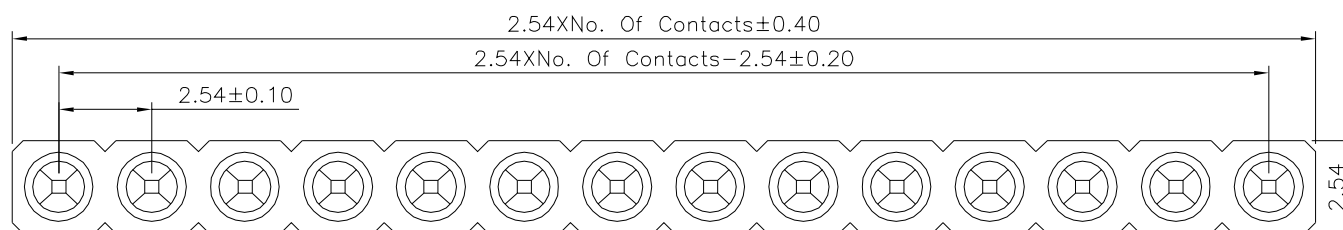

△ SPECIFICATION

Current Rating:3 Amps/Contact Max.
Contact Resistance:4 Milliohms/Contact Max.
Insulation Resistance:1000 Megaohms Min. At 100V
Operating Voltage:60V AC/DC
Average Insertion Force With Steel Pin Of
ø0.43mm:<250g
Average Withdrawal Force With Steel Pin Of
ø0.43mm:>90g Min.
Operating Temperature:Gold Plated:-55°C~+105°C
Tin Plated:-40°C~+105°C
Pin(Outer Sleeve):Brass,Tin Plated Over Nickel
Clip(Contact 4 Finger):Beryllium Copper,Gold Plated
Over Nickel
Insulator(Housing):PPS(UL94V-0),Black
RoHS Compliant