



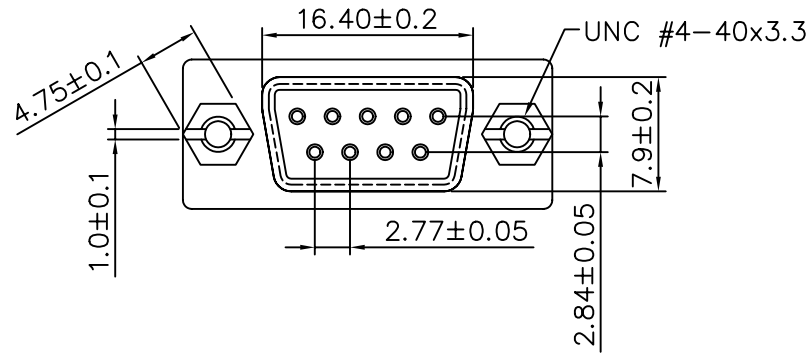


SPECIFICATIONS :
 Current Rating : 3AMP
 Dielectric Strength : 1000V For 1 Minute
 Insulator Resistance : 1000 Megohms Min.
 At DC 500V
 Temperature : -55°C To +105°C
 Shell : Nickel Silver
 Contact : Brass Gold Plated Over Nickel
 Insulator : PBT Glass Fibre Reinforced UL 94V-0

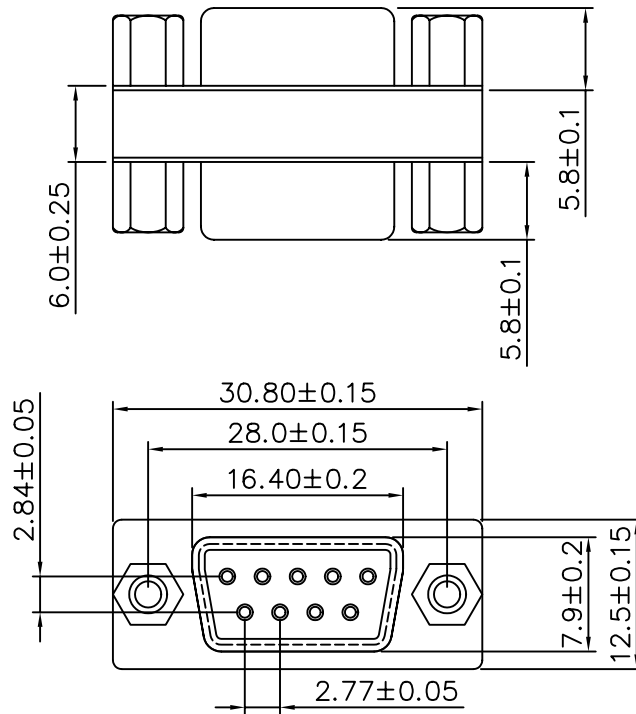


UNC#4-40 Hexscrew

UNC#4-40Hexnut

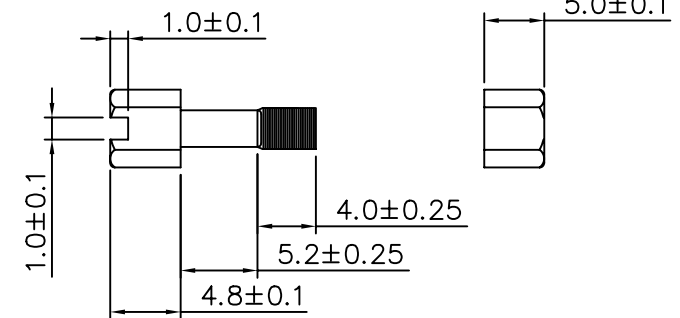

Pin Out:9Female

9Female

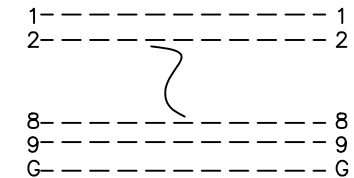

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.
 05973

APPROVED BY MEI
 CHECKED BY RAN
 DRAWING BY HZF

UNLESS OTHERWISE SPECIFIED
 TOLERANCES ARE
 .X ±0.38
 .XX ±0.25
 AWG.

SCALE NONE

REV. A

UNIT mm

AREA REVISIONS CHK DATE