


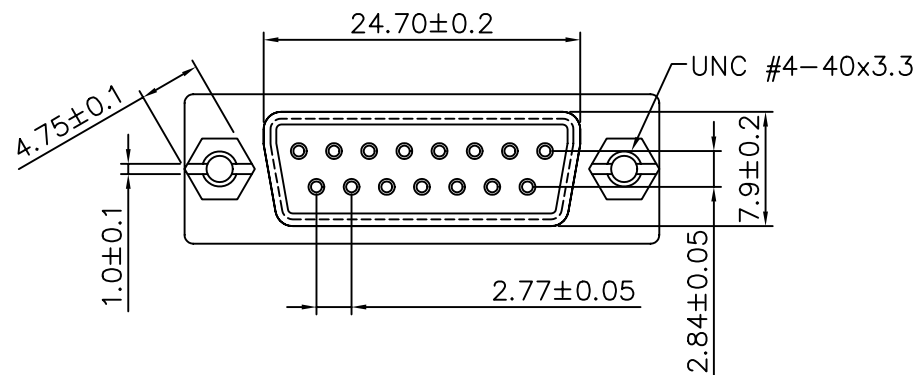

SPECIFICATIONS :

Current Rating : 3AMP

Dielectric Strength : 1000V For 1 Minute

Insulator Resistance : 1000 Megohms Min.



At DC 500V

Temperature : -55°C To +105°C


Shell : Nickel Silver

Contact : Brass Gold Plated Over Nickel


Insulator : PBT Glass Fibre Reinforced UL 94V-0

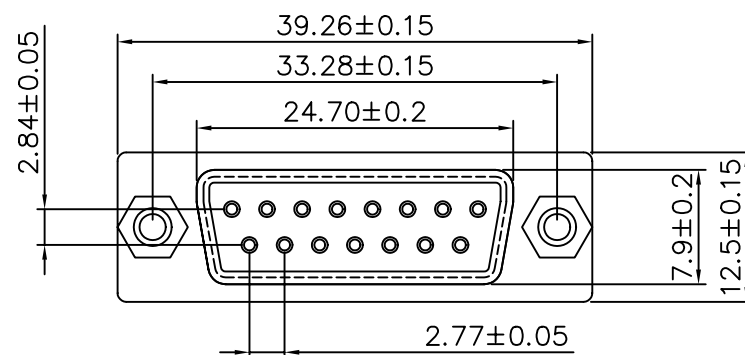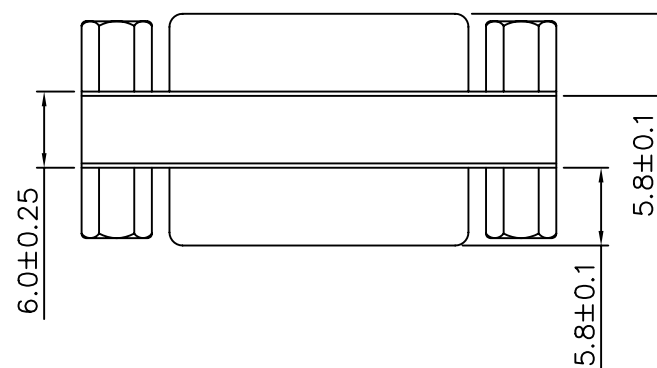

UNC#4-40 Hexscrew

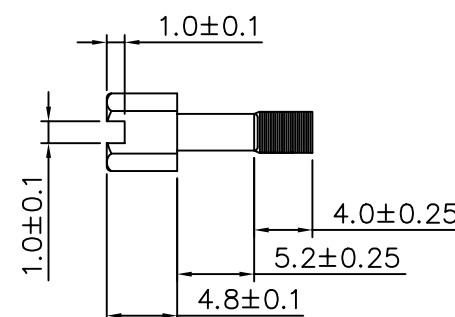


UNC#4-40Hexnut



Pin Out:15Female

15Female

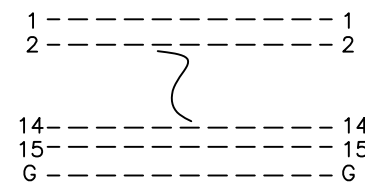

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

05974

APPROVED BY

MEI

CHECKED BY

RAN

DRAWING BY

HZF

SCALE

NONE

REV.

A

UNIT
mm

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ±0.38
.XX ±0.25
AWG.

AREA

REVISIONS

CHK

DATE