File No.	259FJ30226	SHEET	1/1

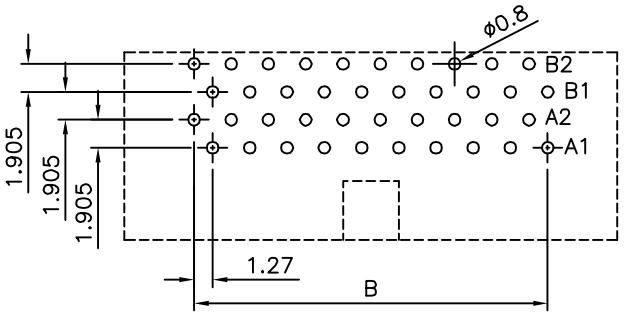

⚠1 Recommended P.C.B. Layout(Top View)
(20,32,40,52,60,68,80,100 Pin)

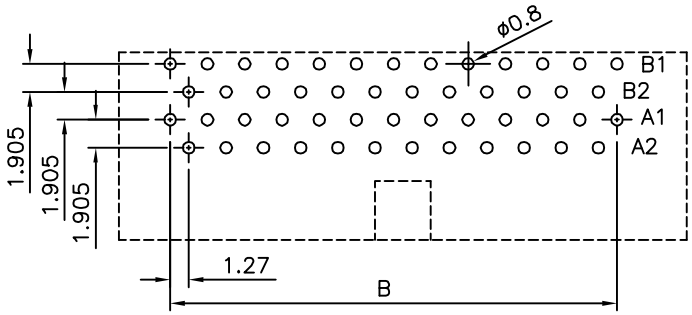

⚠1 Recommended P.C.B. Layout(Top View)
(26,34,50 Pin)

⚠1 SPECIFICATION
Current Rating:1 Amp
Withstand Voltage:500V AC For 1 Minute
Contact Resistance:20 Milliohms Max. At 100mA DC
Insulation Resistance:1000 Megaohms Min. At 250V DC
Operation Temperature:−55°C~+105°C
Contact:Brass,Gold Flash On Contact Area,Tin Plated On Solder Tails,Over Nickel
Insulator:PBT+G.F.(UL94V−0),Black
RoHS Compliant

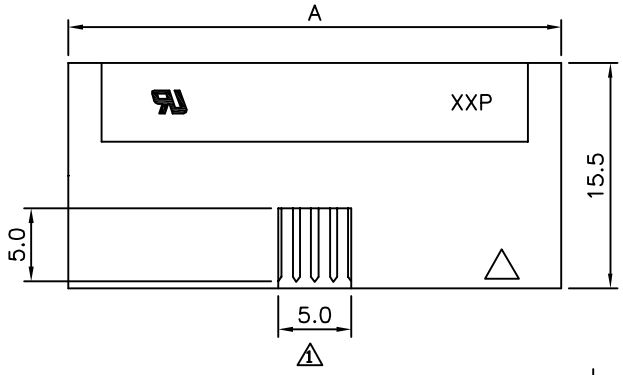

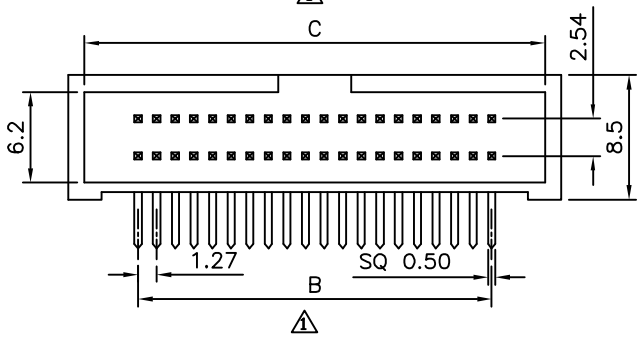

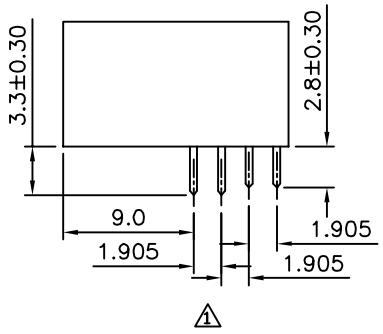

Pin	A	B	C
20	20.95	11.43	18.75
26	24.76	15.24	22.56
32	28.57	19.05	26.37
34	29.84	20.32	27.64
40	33.65	24.13	31.45
50	40.00	30.48	37.80
52	41.27	31.75	39.07
60	46.35	36.83	44.15
68	51.43	41.91	49.23
80	59.05	49.53	56.85
100	71.75	62.23	69.55

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.	06586		
APPROVED BY	EMILY		
CHECKED BY	HZF		
DRAWING BY	CYP		
SCALE	NONE	REV.	A1

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
⚠1 X. ±0.5
.X ±0.25
.XX ±0.15
UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
⚠1	A1	Modify Data	HZF	10/24/2015
⚠0	A0	NEW RELEASE		