


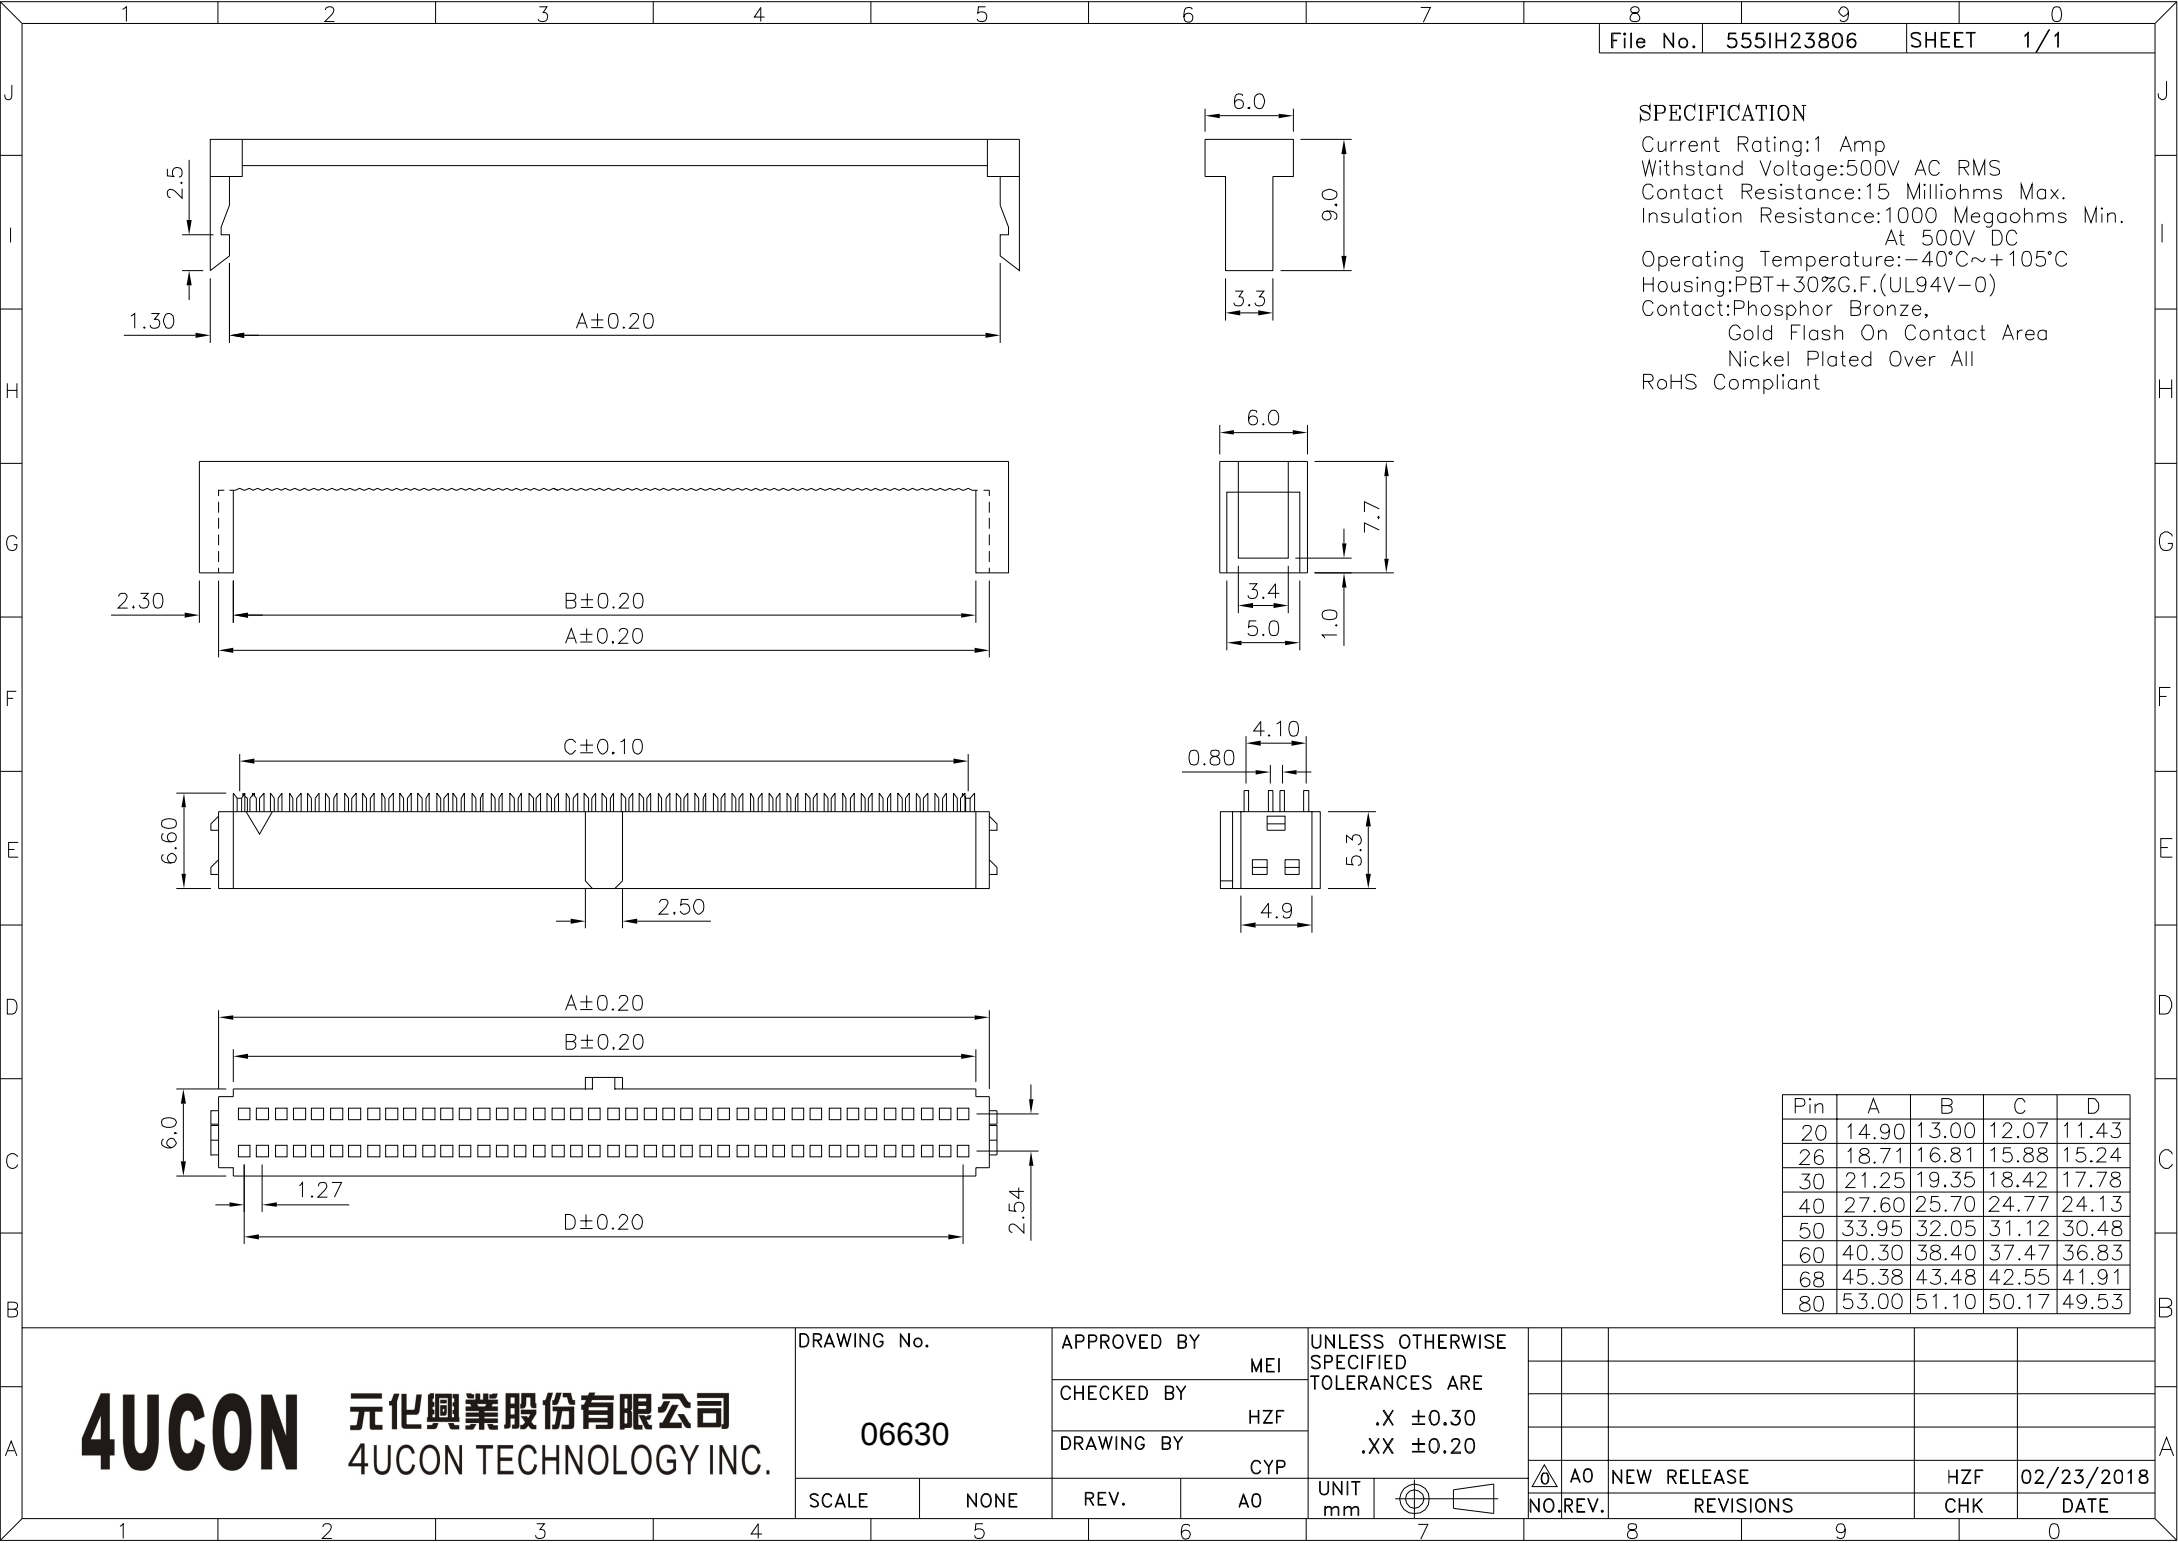

SPECIFICATION
Current Rating:1 Amp
Withstand Voltage:500V AC RMS
Contact Resistance:15 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
At 500V DC
Operating Temperature:−40°C~+105°C
Housing:PBT+30%G.F.(UL94V−0)
Contact:Phosphor Bronze,
Gold Flash On Contact Area
Nickel Plated Over All
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 06630
APPROVED BY MEI
CHECKED BY HZF
DRAWING BY CYP
SCALE NONE
REV. A0
UNIT mm

NO. REV. A0
NEW RELEASE
REVISIONS
HZF
02/23/2018
CHK
DATE