

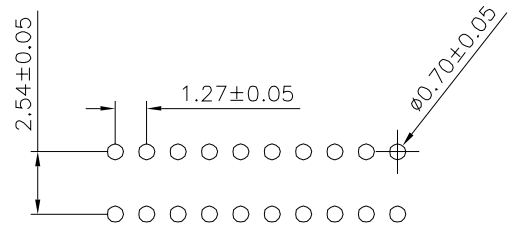
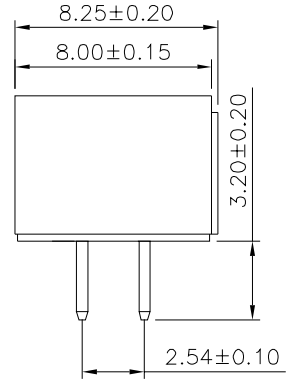


SPECIFICATION

Current Rating:1A
 Withstand Voltage:500V AC/Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operating Temperature:-40°C~+105°C
 Insulator:PA6T+30%G.F.(UL94V-0),Black
 Contact:Brass,Gold Flash Over Nickel
 RoHS Compliant

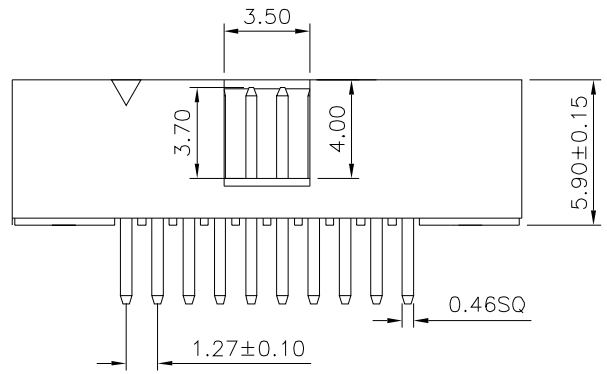

Recommended P.C.B. Layout

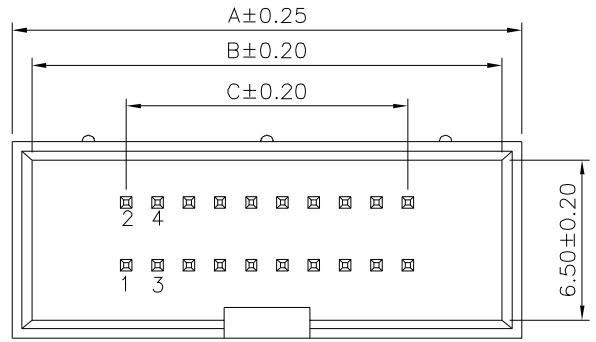

Pin	A	B	C
10	14.35	12.75	5.08
20	20.70	19.10	11.43
24	23.24	21.64	13.97
26	24.51	22.91	15.24
30	27.05	25.45	17.78
32	28.32	26.72	19.05
34	29.59	27.99	20.32
36	30.86	29.26	21.59
40	33.40	31.80	24.13
44	35.94	34.34	26.67
50	39.75	38.15	30.48
52	41.02	39.45	31.75
60	46.10	44.50	36.83
68	51.18	48.59	41.91
80	58.80	57.20	49.53
100	71.50	59.90	62.23

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.30 .XX ±0.20
06641		MEI		
		CHECKED BY HZF		
SCALE		DRAWING BY		UNIT mm
NONE		CYP		
REV.	A0	NO.	AO	REVISIONS

△	AO	NEW RELEASE	HZF	04/30/2020
NO.	REV.	REVISIONS	CHK	DATE