
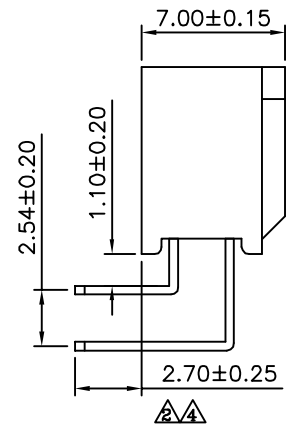
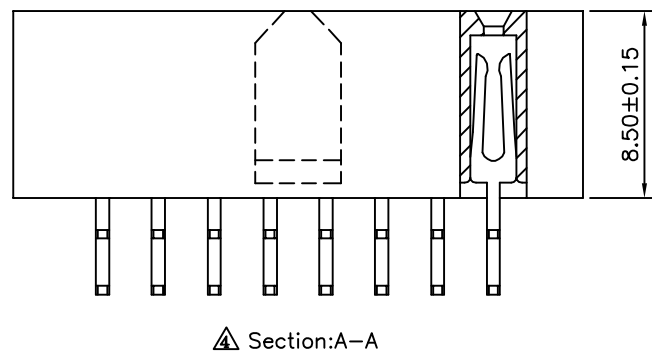
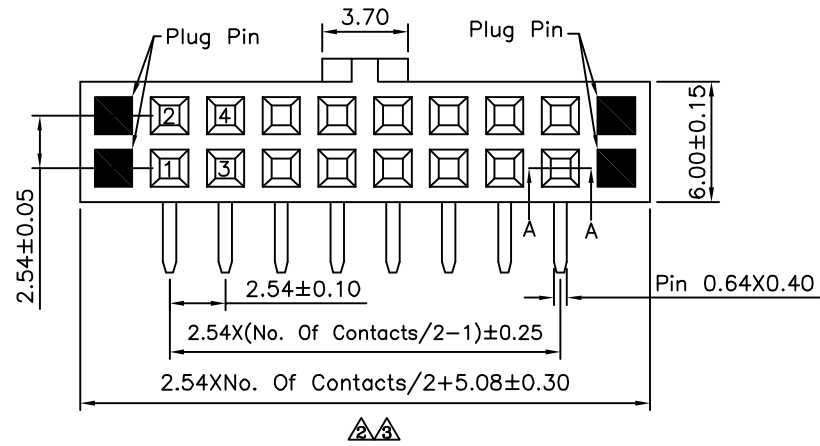


SPECIFICATION

- Current Rating:3.0 Amp
- Insulation Resistance:1000 Megaohms Min.
- Contact Resistance:20 Milliohms Max.
- Dielectric Withstanding:1000V AC/DC
- Operation Temperature:-40°C~+105°C
- ⚠ A4 Contact:Brass,Gold Plated Over Nickel
- ⚠ A2 Insulator:PBT+30%G.F.(UL94V-0),Black
- ⚠ A3 RoHS Compliant

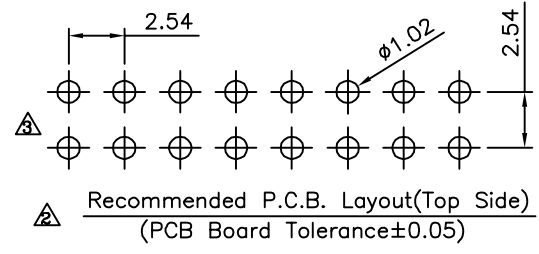

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.40 .XX ±0.25 .XXX ±0.15 ANG. ±3°
06790		EMILY		
		HZF		
		DRAWING BY		UNIT mm
		SAN		
SCALE	NONE	REV.	A4	NO.REV.

⚠ A4	Modify Data	HZF	05/07/2014
⚠ A3	Modify Data	HZF	11/23/2009
⚠ A2	Modify Data	HZF	03/06/2009
⚠ A1	Modify Data	BECKY	04/20/2006
⚠ A0	NEW RELEASE	BECKY	09/22/2005
NO.REV.	REVISIONS	CHK	DATE