
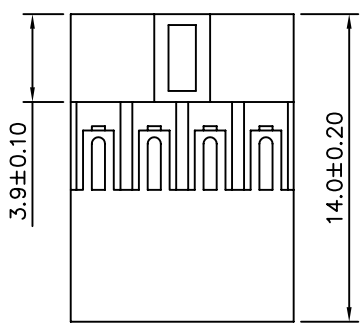
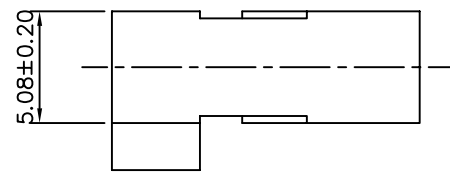


△ SPECIFICATIONS
 Current Rating: 3A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25°C~+85°C
 Insulation Resistance: 1000 Megohms Min.
 Withstand Voltage: 800V AC/Minute
 Material: Noryl-V2,Black

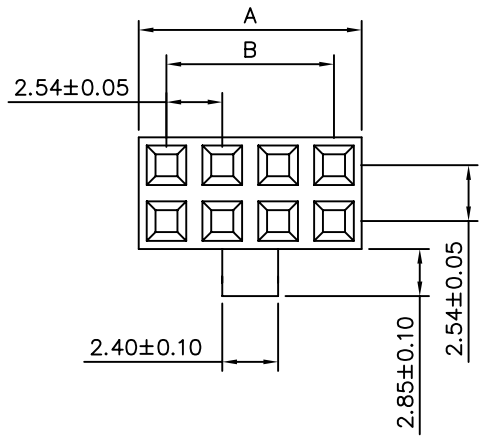

Circuits	Dim.A	Dim.B	Circuits	Dim.A	Dim.B
4	5.08	2.54	44	55.88	53.34
6	7.62	5.08	46	58.42	55.88
8	10.16	7.62	48	60.96	58.42
10	12.70	10.16	50	63.50	60.96
12	15.24	12.70	52	66.04	63.50
14	17.78	15.24	54	68.58	66.04
16	20.32	17.78	56	71.12	68.58
18	22.86	20.32	58	73.66	71.12
20	25.40	22.86	60	76.20	73.66
22	27.94	25.40	62	78.74	76.20
24	30.48	27.94	64	81.28	78.74
26	33.02	30.48	66	83.82	81.28
28	35.56	33.02	68	86.36	83.82
30	38.10	35.56	70	88.90	86.36
32	40.64	38.10	72	91.44	88.90
34	43.18	40.64	74	93.98	91.44
36	45.72	43.18	76	96.52	93.98
38	48.26	45.72	78	99.06	96.52
40	50.80	48.26	80	101.60	99.06
42	53.34	50.80	100	127.00	124.46

Dim.A,Dim.B Tolerance
 2x2P~2x10P ±0.10
 2x11P~2x20P ±0.20
 2x21P~2x30P ±0.30
 2x31P~2x40P ±0.40
 2x41P~2x50P ±0.50

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED					
06885		MEI		TOLERANCES ARE					
		CHECKED BY		.X ±0.38		△ A2	Modify Spec.	BECKY	10/04/2005
		BECKY		.XX ±0.25		△ A1	Modify Data	BECKY	03/16/2005
		DRAWING BY		ANG.		△ A	NEW RELEASE	RAN	
		HZF		UNIT		NO.REV.	REVISIONS	CHK	DATE
SCALE	NONE	REV.	A2	mm	⊕				