
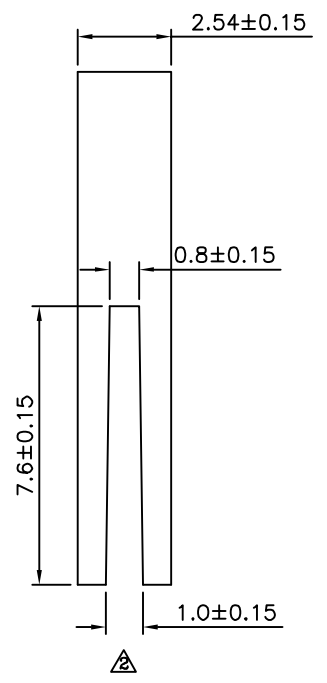
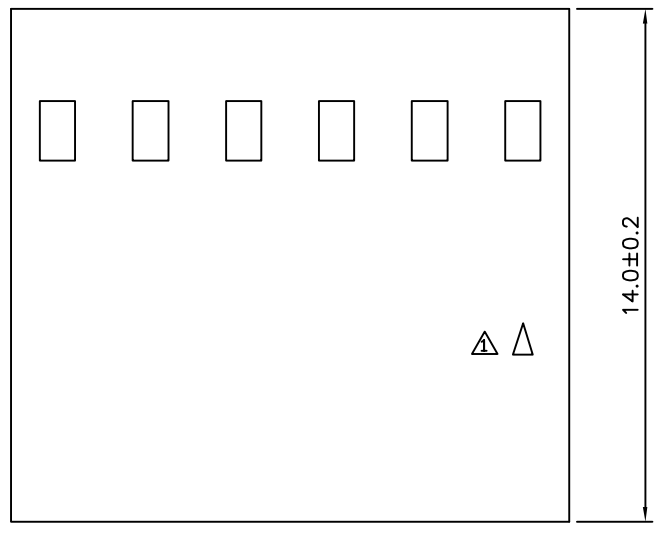


**SPECIFICATION**  
 Current Rating:3A AC/DC  
 Voltage Rating:250V AC/DC  
 Temperature Range:-25°C~+85°C  
 Insulation Resistance:1000 Megaohms Min.  
 Withstand Voltage:1000V AC/Minute  
 Material:PBT(UL94V-0),Black  
 RoHS Compliant

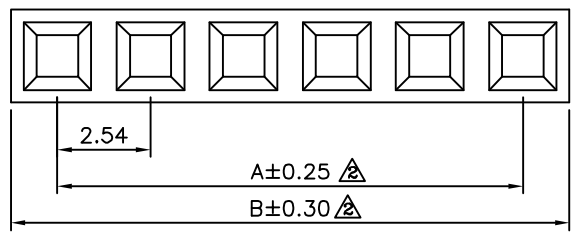

Pin	A	B	Pin	A	B
2	2.54	5.08	15	35.54	38.10
3	5.08	7.62	16	38.10	40.64
4	7.62	10.16	17	40.64	43.18
5	10.16	12.70	18	43.18	45.72
6	12.70	15.24	19	45.72	48.26
7	15.24	17.78	20	48.26	50.80
8	17.78	20.32	21	50.80	53.34
9	20.32	22.86	22	53.34	55.88
10	22.86	25.40	23	55.88	58.42
11	25.40	27.94	24	58.42	60.96
12	27.94	30.48	25	60.96	63.50
13	30.48	33.02	30	73.75	76.34
14	33.02	35.54	40	99.3	101.9

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No. 07113  
 SCALE NONE

APPROVED BY MEI  
 CHECKED BY HZF  
 DRAWING BY CYP  
 REV. A2

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
 X<sub>s</sub> ±0.5  
 X<sub>x</sub> ±0.25  
 .XX ±0.2  
 .XXX ±0.08  
 UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
A2		Modify Data	HZF	07/08/2015
A1		Modify Data	HZF	06/11/2010
A0		NEW RELEASE	HZF	11/05/2007