
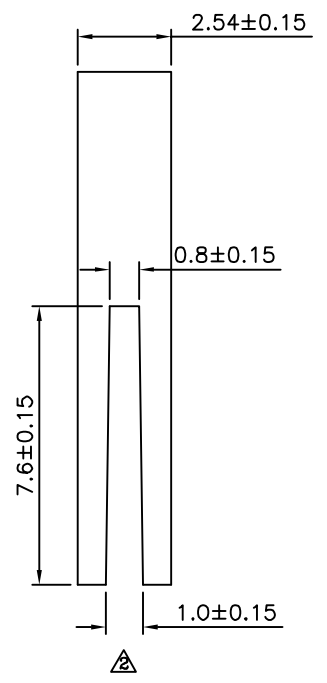
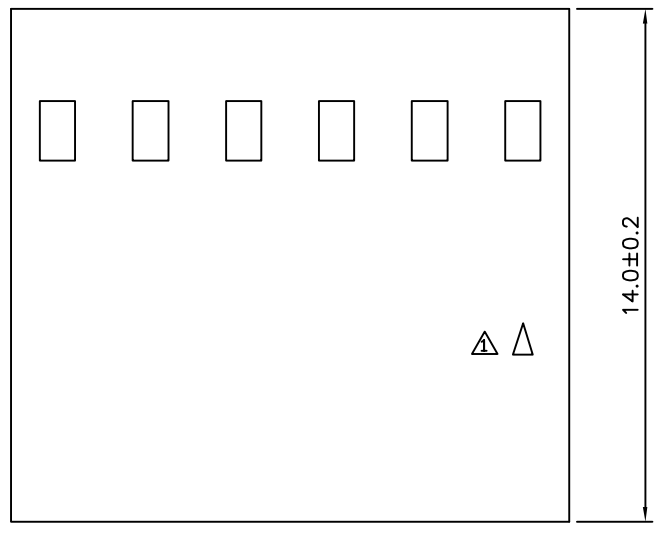


SPECIFICATION
 Current Rating:3A AC/DC
 Voltage Rating:250V AC/DC
 Temperature Range:-25°C~+85°C
 Insulation Resistance:1000 Megaohms Min.
 Withstand Voltage:1000V AC/Minute
 Material:PBT(UL94V-0),Black
 RoHS Compliant

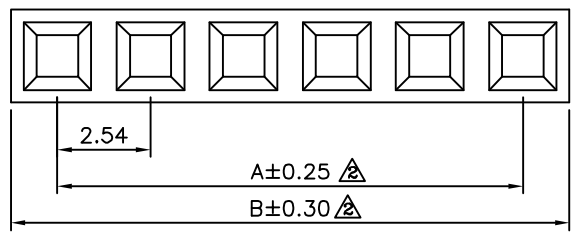

| Pin | A | B | Pin | A | B |
|-----|-------|-------|-----|-------|-------|
| 2 | 2.54 | 5.08 | 15 | 35.54 | 38.10 |
| 3 | 5.08 | 7.62 | 16 | 38.10 | 40.64 |
| 4 | 7.62 | 10.16 | 17 | 40.64 | 43.18 |
| 5 | 10.16 | 12.70 | 18 | 43.18 | 45.72 |
| 6 | 12.70 | 15.24 | 19 | 45.72 | 48.26 |
| 7 | 15.24 | 17.78 | 20 | 48.26 | 50.80 |
| 8 | 17.78 | 20.32 | 21 | 50.80 | 53.34 |
| 9 | 20.32 | 22.86 | 22 | 53.34 | 55.88 |
| 10 | 22.86 | 25.40 | 23 | 55.88 | 58.42 |
| 11 | 25.40 | 27.94 | 24 | 58.42 | 60.96 |
| 12 | 27.94 | 30.48 | 25 | 60.96 | 63.50 |
| 13 | 30.48 | 33.02 | 30 | 73.75 | 76.34 |
| 14 | 33.02 | 35.54 | 40 | 99.3 | 101.9 |

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. 07115
 SCALE NONE

APPROVED BY MEI
 CHECKED BY HZF
 DRAWING BY CYP
 REV. A2

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 X_s ±0.5
 X_x ±0.25
 .XX ±0.2
 .XXX ±0.08
 UNIT mm

| NO. | REV. | REVISIONS | CHK | DATE |
|-----|------|-------------|-----|------------|
| A2 | | Modify Data | HZF | 07/08/2015 |
| A1 | | Modify Data | HZF | 06/11/2010 |
| A0 | | NEW RELEASE | HZF | 11/05/2007 |