
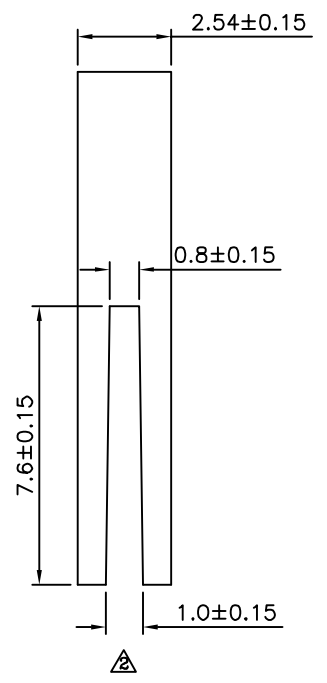
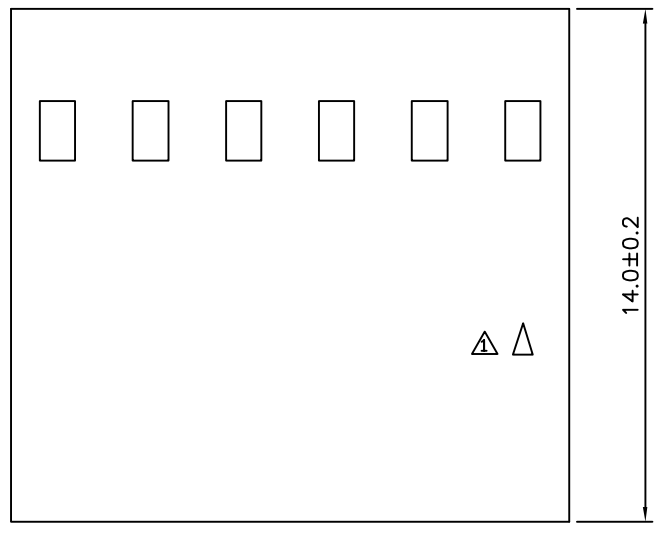


**SPECIFICATION**  
 Current Rating:3A AC/DC  
 Voltage Rating:250V AC/DC  
 Temperature Range:-25°C~+85°C  
 Insulation Resistance:1000 Megaohms Min.  
 Withstand Voltage:1000V AC/Minute  
 Material:PBT(UL94V-0),Black  
 RoHS Compliant

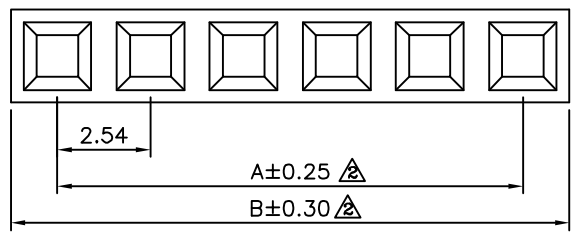

| Pin | A     | B     | Pin | A     | B     |
|-----|-------|-------|-----|-------|-------|
| 2   | 2.54  | 5.08  | 15  | 35.54 | 38.10 |
| 3   | 5.08  | 7.62  | 16  | 38.10 | 40.64 |
| 4   | 7.62  | 10.16 | 17  | 40.64 | 43.18 |
| 5   | 10.16 | 12.70 | 18  | 43.18 | 45.72 |
| 6   | 12.70 | 15.24 | 19  | 45.72 | 48.26 |
| 7   | 15.24 | 17.78 | 20  | 48.26 | 50.80 |
| 8   | 17.78 | 20.32 | 21  | 50.80 | 53.34 |
| 9   | 20.32 | 22.86 | 22  | 53.34 | 55.88 |
| 10  | 22.86 | 25.40 | 23  | 55.88 | 58.42 |
| 11  | 25.40 | 27.94 | 24  | 58.42 | 60.96 |
| 12  | 27.94 | 30.48 | 25  | 60.96 | 63.50 |
| 13  | 30.48 | 33.02 | 30  | 73.75 | 76.34 |
| 14  | 33.02 | 35.54 | 40  | 99.3  | 101.9 |

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No. 07121  
 APPROVED BY MEI  
 CHECKED BY HZF  
 DRAWING BY CYP  
 SCALE NONE REV. A2  
 UNIT mm  
 UNLESS OTHERWISE SPECIFIED TOLERANCES ARE:  
 X ±0.5  
 .X ±0.25  
 .XX ±0.2  
 .XXX ±0.08

| NO. | REV. | REVISIONS   | CHK | DATE       |
|-----|------|-------------|-----|------------|
| A2  |      | Modify Data | HZF | 07/08/2015 |
| A1  |      | Modify Data | HZF | 06/11/2010 |
| A0  |      | NEW RELEASE | HZF | 11/05/2007 |