

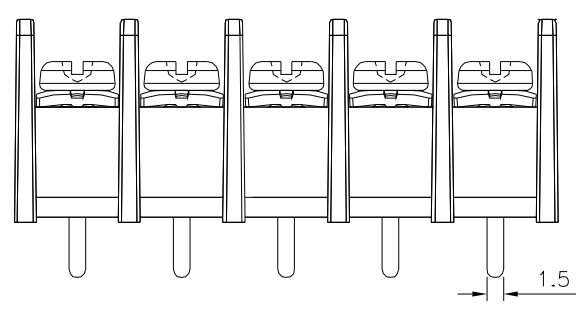


Recommended P.C.B. Layout

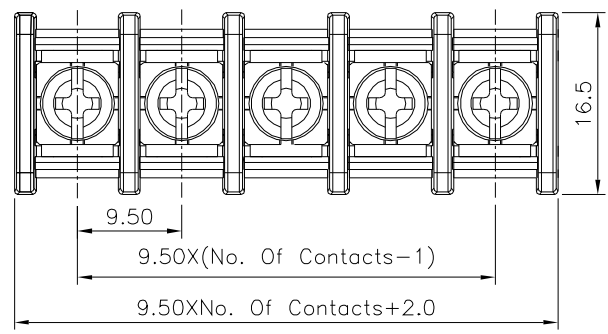

SPECIFICATION

Current Rating: 25 Amps/Way Max.
 Voltage Rating: 300V AC
 Contact Resistance: 20 Milliohms Max.
 Operation Temperature: -40°C ~ +105°C
 Soldering Reliability: Test Temperature: 250°C ± 10°C / 5s Max.
 Withstanding Voltage: 2500V AC (1 Minute)
 Test Time = 60s / 1 PCS
 Wire Range: 12 ~ 22 AWG
 Torque: 10 Kgf.cm / M3.5
 Insulator Body (Housing): PA66 + G.F. (UL94V-0), Black
 Terminals: Copper Alloy, Tin Plated
 Terminal Screw: Steel, Galvanized With Cr3+ Plated
 RoHS Compliant

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.50 .X ±0.30 .XX ±0.20 ANG. ±1°
07331		MEI		
		CHECKED BY		
HZF		DRAWING BY		
CYP		A0		UNIT
SCALE	NONE	REV.	A0	mm

NO.	REV.	REVISIONS	CHK	DATE
△ A0		NEW RELEASE	HZF	05/10/2016