

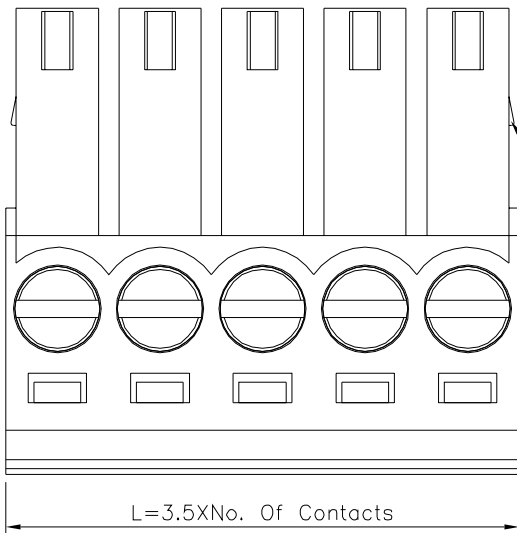


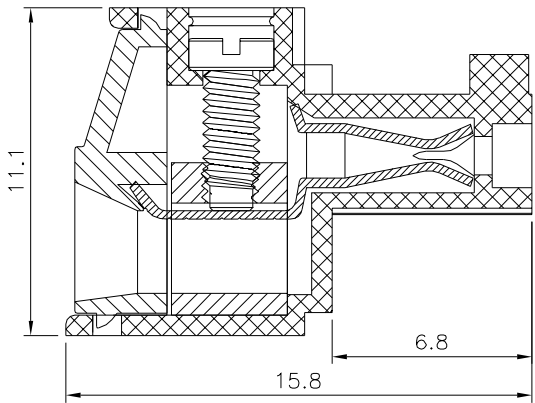

2P To 6P With Wedge,Above
7P Without Wedge(Including 7P)

Length(L)	Tolerances
0~30	±0.30
30~60	±0.40
60~120	±0.50
120~220	±0.60

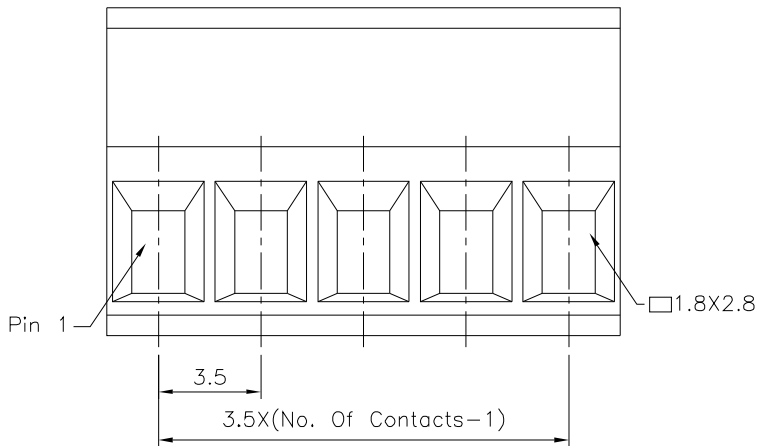

△ SPECIFICATION

Voltage Rating:300V AC
Current Rating:12A/Way Max.
Contact Resistance:20 Milliohms Max.
Withstanding Voltage:1600V AC/Minute
Wire Range:16~24 AWG
Torque:2.5 Kgf.cm/M2
Operation Temperature:-40°C~+105°C
Contact:Copper Alloy,Nickel Plated
Terminal Screw:Steel,Galvanized With Cr3+ Plated
Wire Guard:Copper Alloy,Tin Plated
Insulator Body:Polyamide(UL94V-0),Green
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.
07549

APPROVED BY
Jason Wu
CHECKED BY
Leo Han
DRAWING BY
Michelle Lee

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
X. ±0.50
.X ±0.40
.XX ±0.30△
ANG. ±1°

NO.	REV.	REVISIONS	CHK	DATE
△	B1	Modify Data	HZF	03/27/2026
△	B0	NEW RELEASE	HZF	10/04/2018

SCALE NONE REV. B1

UNIT mm