

4 SPECIFICATION

1.Material&Finish

Insulator:PA66+15%G.F.(UL94V-0),Black
Contact:Brass,Tin Plated

2.Electrical Characteristics






Current Rating:5A AC/DC
Voltage Rating:250V AC/DC
Withstanding Voltage:1500V AC/Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.

3.Environmental Characteristics

Temperature Range:-25°C~+85°C

4.RoHS Compliant

2 Recommended P.C.B. Layout
4 Tolerance:±0.05

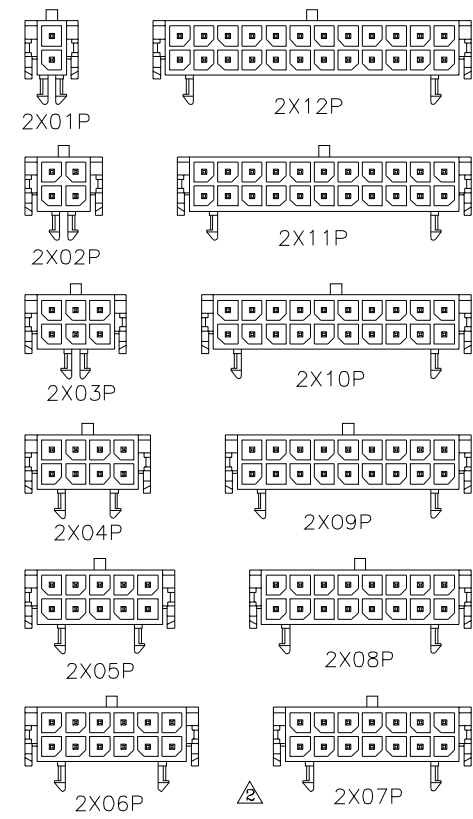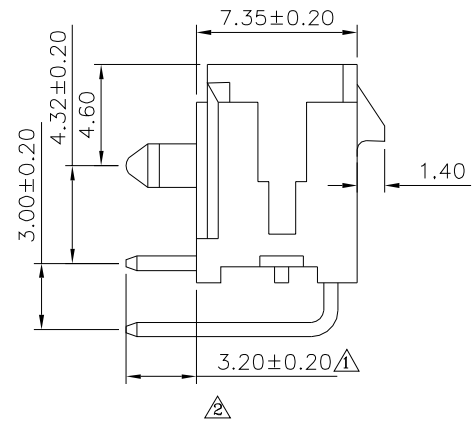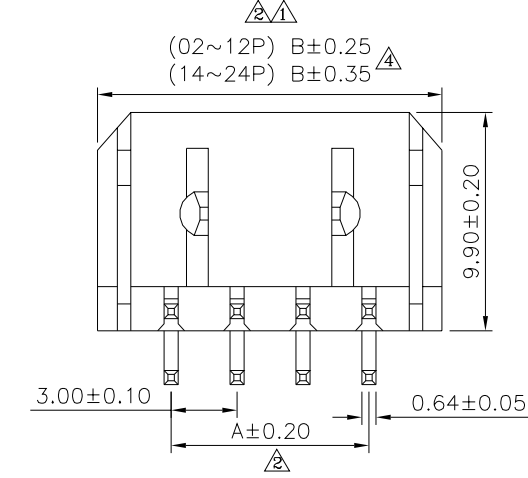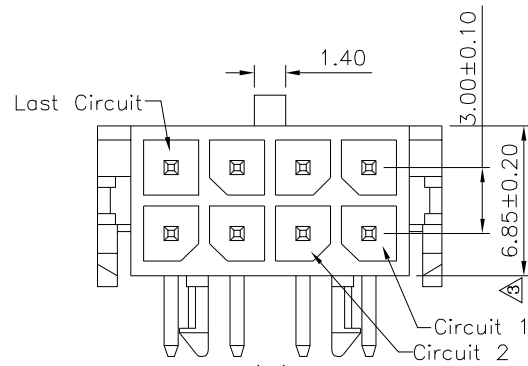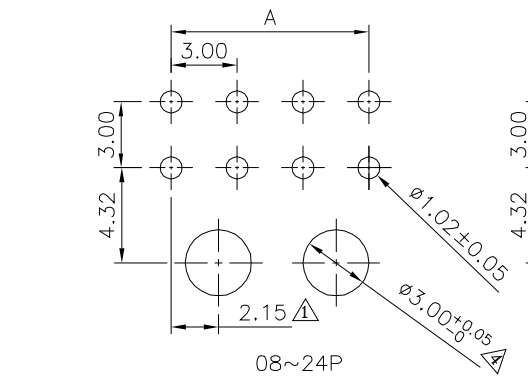

Pin	A	B
02	—	6.65
04	3.00	9.65
06	6.00	12.65
08	9.00	15.65
10	12.00	18.65
12	15.00	21.65
14	18.00	24.65
16	21.00	27.65
18	24.00	30.65
20	27.00	33.65
22	30.00	36.65
24	33.00	39.65

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		4 A4	Modify Data	HZF	04/15/2022
07782		MEI		X. ±0.30		3 A3	Modify Dim.	HZF	04/13/2018
		HZF		.X ±0.25		2 A2	Modify Data	HZF	09/28/2017
		CYP		.XXX ±0.20		1 A1	Modify Data	HZF	08/28/2013
SCALE		REV.		ANG. ±1°		0 A0	NEW RELEASE	HZF	11/16/2011
NONE		A4		UNIT mm		NO.REV.	REVISIONS	CHK	DATE