


**SPECIFICATIONS**

Current Rating:5AMP  
 Dielectric Withstanding Voltage:  
 AC 1000V For 1 Minute  
 Contact Resistance:30 Milliohms At DC 100mA  
 Insulator Resistance:1000Megohms Min.At DC 500V  
 Operating Temperature:-55°C To +235°C  
 Contact:Phosphor Bronze  
 Housing:Nylon 6T


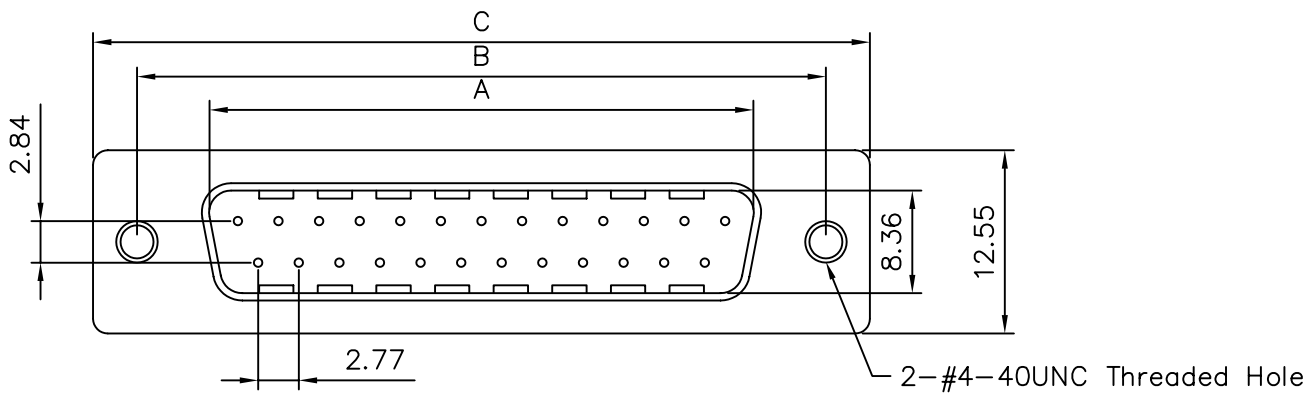


**Terminal Specification**

Drilled Hole	1.1±0.2
Finished Hole	1.0±0.05
Cu	Min 25um
Sn	5-15um

**Boardlock Specification**

Drilled Hole	3.2±0.02
Finished Hole	3.1±0.05
Cu	Min 25um
Sn	5-15um

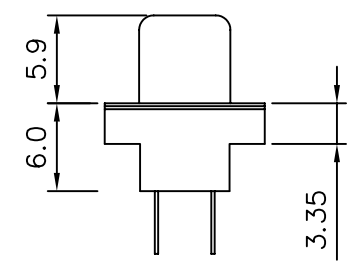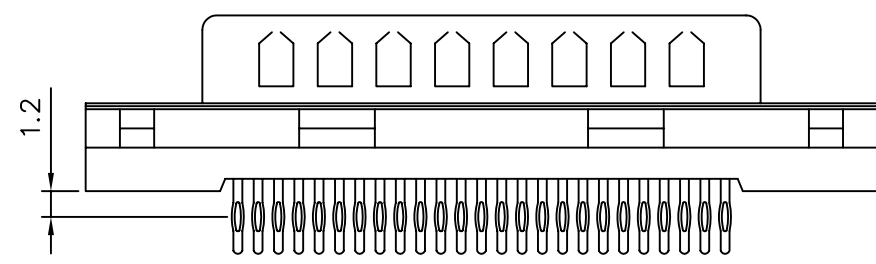

Positions	A	B	C
09	16.92	24.99	30.81
15	25.50	33.32	39.14
25	38.96	47.04	53.04
37	55.42	63.50	69.32

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.  
 07933

APPROVED BY MEI  
 CHECKED BY RAN  
 DRAWING BY HZF

UNLESS OTHERWISE SPECIFIED  
 TOLERANCES ARE  
 .X ±0.30  
 .XX ±0.10  
 .XXX ±0.05

SCALE NONE REV. A

UNIT mm  
 A NEW RELEASE  
 REVISIONS  
 RAN  
 CHK DATE