
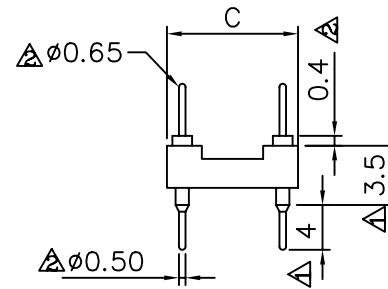
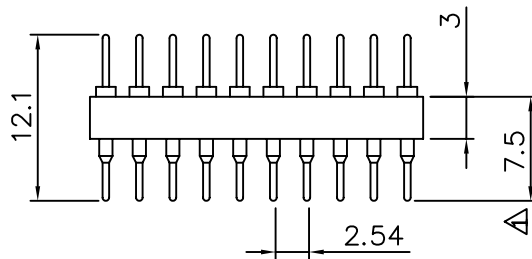


SPECIFICATIONS:

Dielectric Withstanding : 600V RMS.
 Contact Resistance: 100 Milliohms Max.
 Insulation Resistance : 5000 Megohms Min.
 Temperature : -55°C To +125°C
 Insertion Force : Average 500 GR
 Extraction Test : Average 159 GR
 Resist To Soldering Heat: Max. 260°C, 5 Sec.
 Contact: Copper Alloy, Gold Flash
 Insulator: Grass Filled Polyester, UL94V-0
 Sleeve: Brass, 10Micro Inch Gold Plating Or
 200Micro Inch Tin Plating

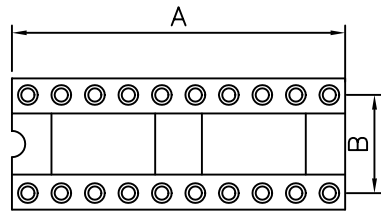

Position	A	B	C
06	7.62	7.62	10.16
08	10.16	7.62	10.16
10	12.70	7.62	10.16
14	17.78	7.62	10.16
16	20.32	7.62	10.16
18	22.86	7.62	10.16
20	25.40	7.62	10.16
22	27.94	7.62	10.16
24	30.48	7.62	10.16
28	35.56	7.62	10.16

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.
 08206

APPROVED BY MEI
 CHECKED BY BECKY
 DRAWING BY HZF

UNLESS OTHERWISE SPECIFIED
 TOLERANCES ARE
 .X ±0.2
 .XX ±0.15
 ANG.

SCALE NONE

REV. A1

UNIT mm

NO.

REV.

REVISIONS

CHK

DATE

NO.	REV.	REVISIONS	CHK	DATE
2	A1	ADD DIM.	MEI	2004/05/05
1	A1	MODIFY DIM.	MEI	2004/05/05
0	A0	NEW RELEASE	MEI	