


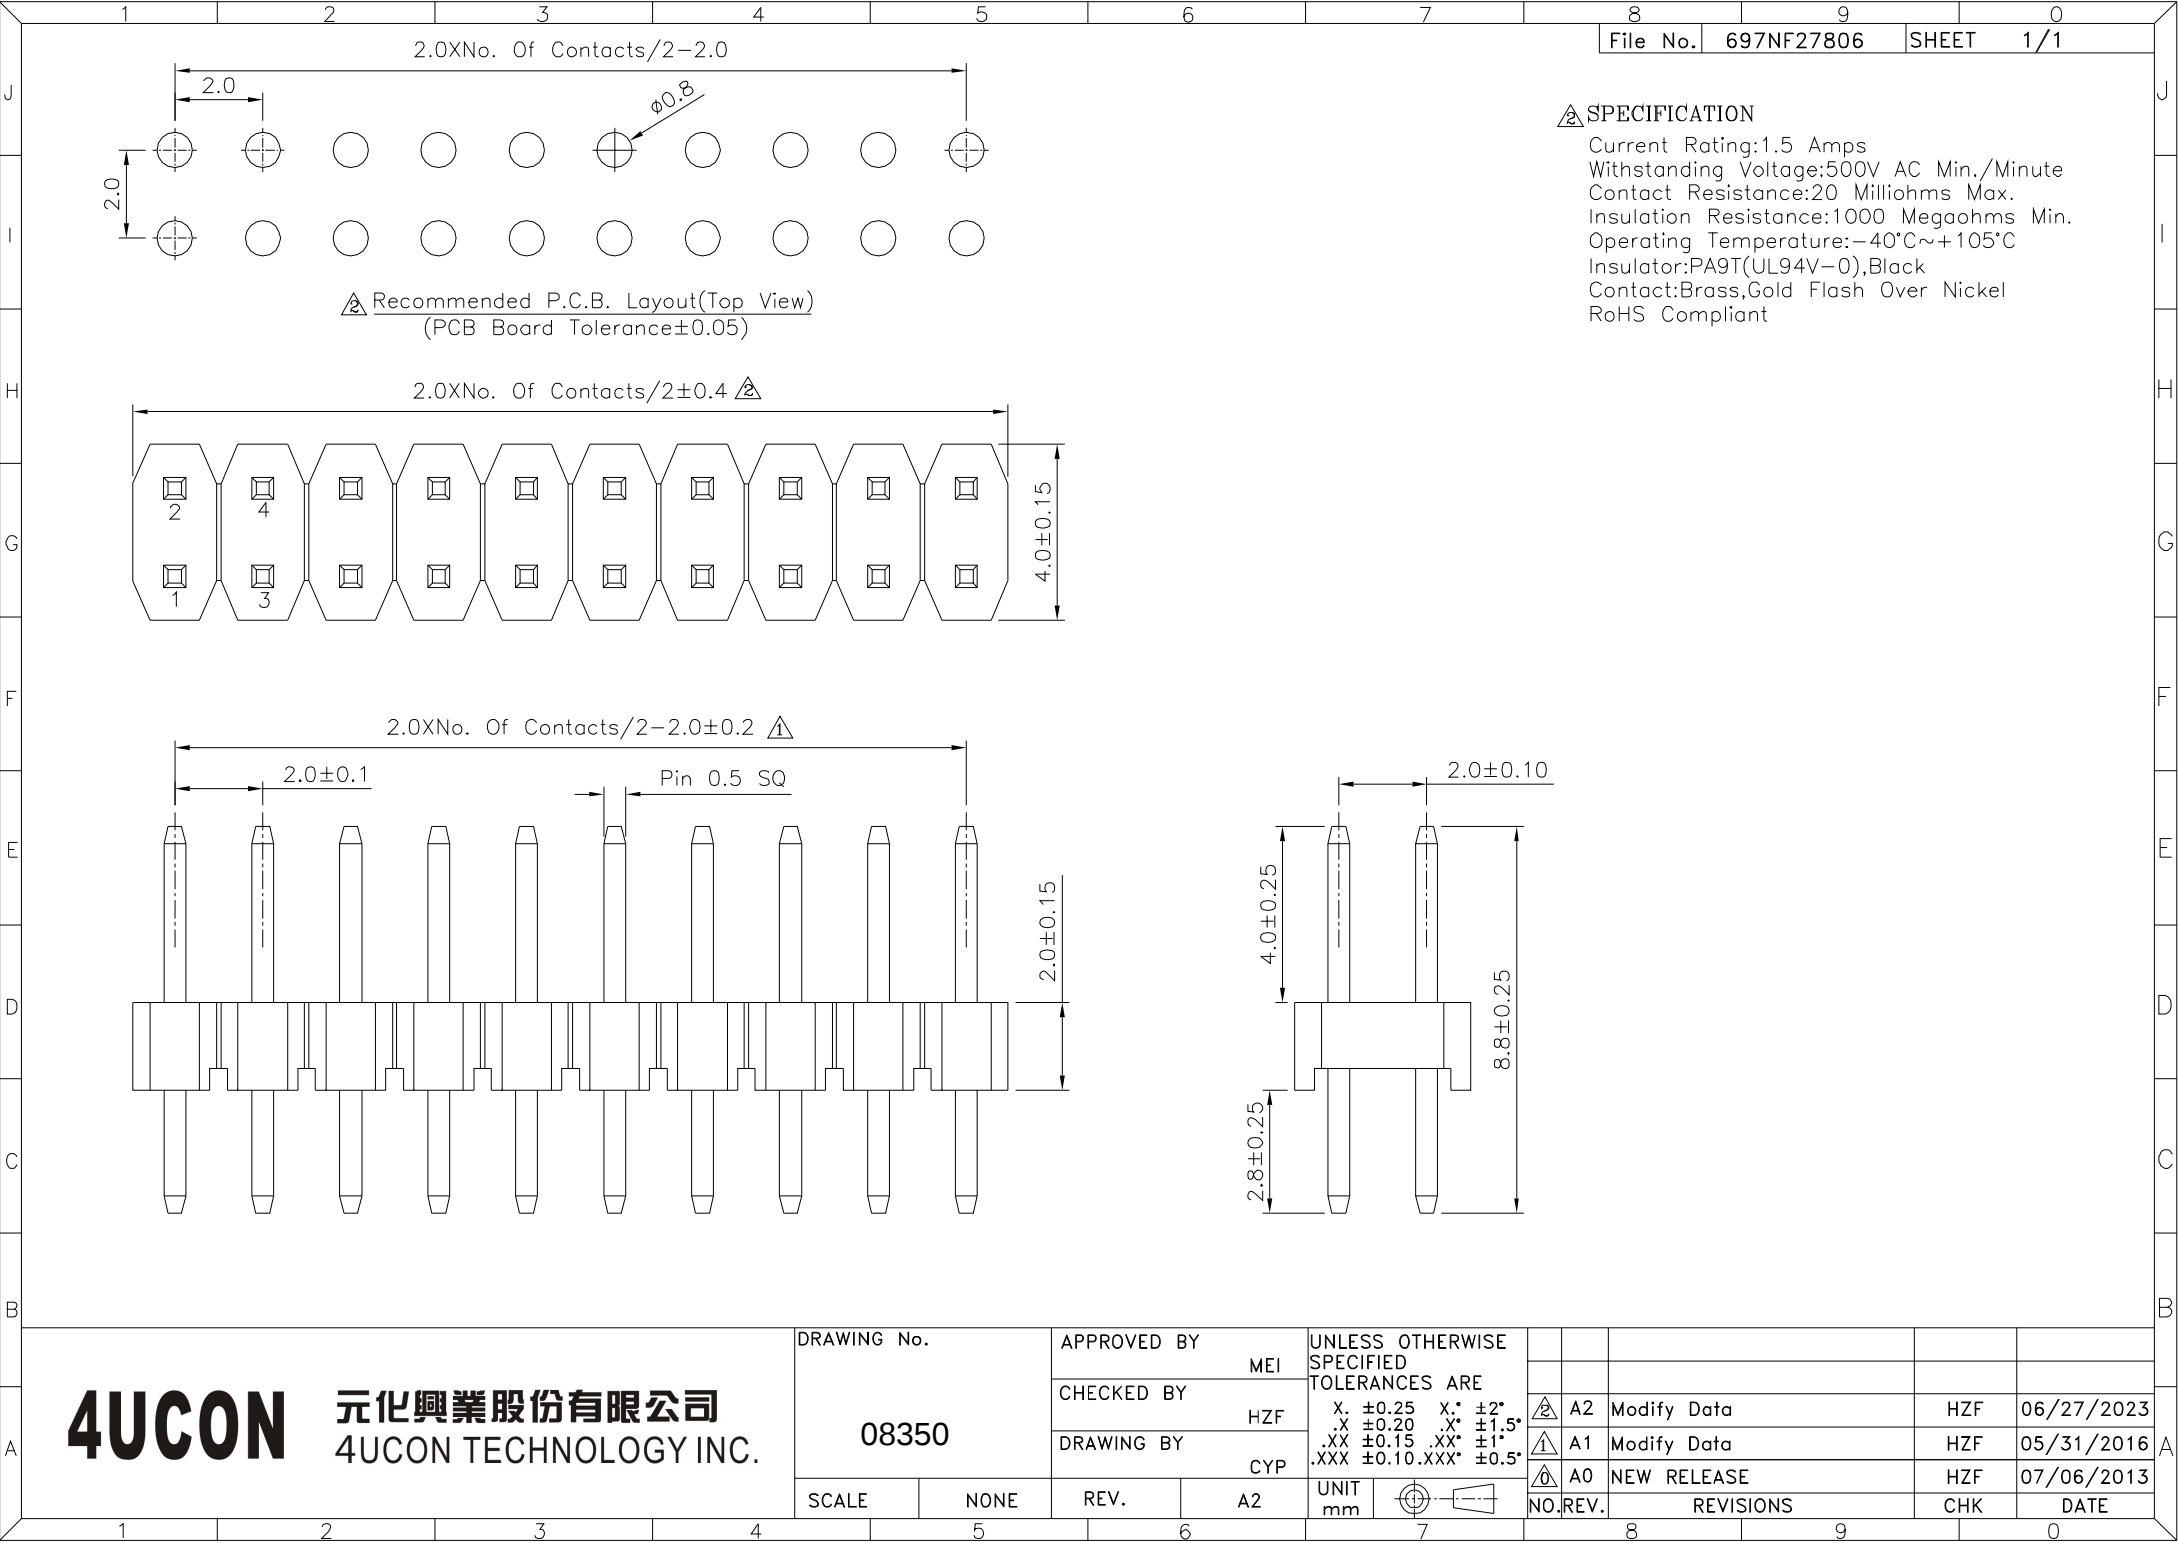

△ SPECIFICATION
Current Rating:1.5 Amps
Withstanding Voltage:500V AC Min./Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operating Temperature:-40°C~+105°C
Insulator:PA9T(UL94V-0),Black
Contact:Brass,Gold Flash Over Nickel
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 08350		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.25 X.* ±2* .X ±0.20 .X.* ±1.5* .XX ±0.15 .XX* ±1* .XXX ±0.10 .XXX* ±0.5*						
		MEI								
		CHECKED BY								
		HZF								
		DRAWING BY		CYP						
SCALE	NONE	REV.	A2	UNIT mm		NO.	REV.	REVISIONS	CHK	DATE
						A2	Modify Data		HZF	06/27/2023
						A1	Modify Data		HZF	05/31/2016
						A0	NEW RELEASE		HZF	07/06/2013