

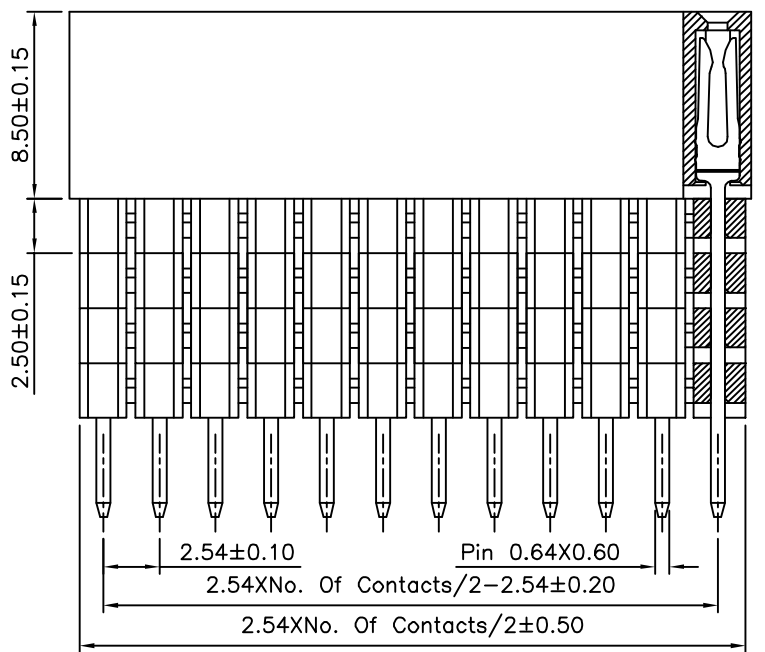


Recommended P.C.B. Layout(Top Side)
(PCB Board Tolerance±0.05)

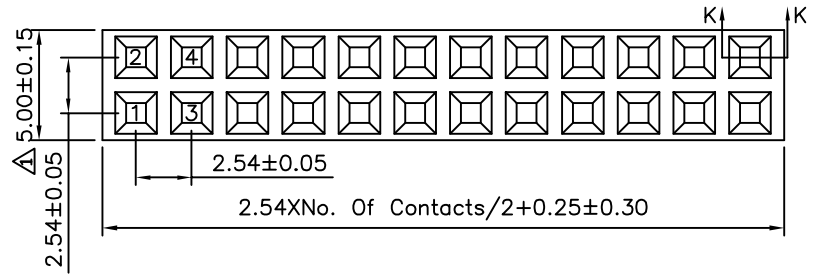

Section K-K

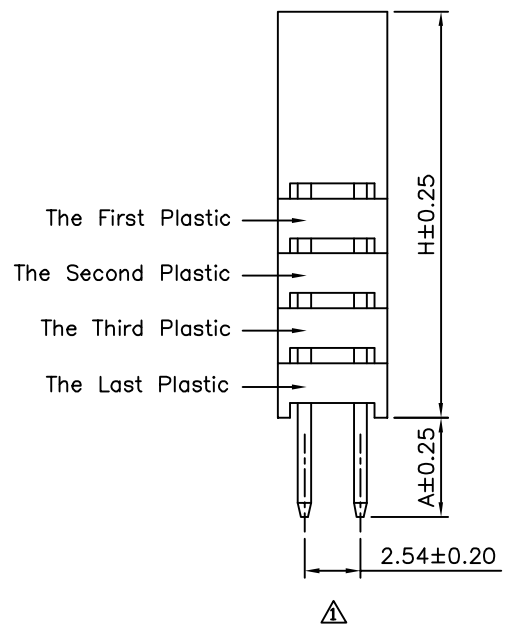

SPECIFICATION

Current Rating:3.0 Amp
Withstand Voltage:1000V AC/DC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Contact:Brass,Gold Plated Over Nickel
Insulator:PBT+30%G.F.(UL94V-0),Black
RoHS Compliant

Series No.	Plastic Q'ty	H	A
0196	1	11.05	2.30
0196	1	11.05	7.35
0196	1	11.05	12.2
0197	2	13.59	4.85
0197	2	13.59	9.65
0198	3	16.13	2.30
0198	3	16.13	7.10
0199	4	18.6	4.60

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.40 .XX ±0.25 .XXX ±0.15 ANG. ±3°
08405		MEI		
		CHECKED BY		
		HZF		
		DRAWING BY		UNIT mm
		CYP		
SCALE	NONE	REV.	B1	NO.REV.

NO.	REV.	REVISIONS	CHK	DATE
△ B1		Modify Data	HZF	03/09/2016
△ B0		NEW RELEASE	HZF	05/07/2014