







**SPECIFICATION**

**1.General Characteristics**  
3.0mm Micro-Fit 1XXX Female  
Housing Black Insulator

**2.Material&Finish**  
Housing:PA66(UL94V-2),Black

**3.Electrical Characteristics**  
Current Rating:5A AC,DC  
Voltage Rating:250V AC,DC  
Insulation Resistance:1000 Megohms Min.  
Withstand Voltage:1500V AC/Minute

**4.Environmental Characteristics**  
Temperature Range:-25°C~+105°C  
**5.RoHS Compliant**

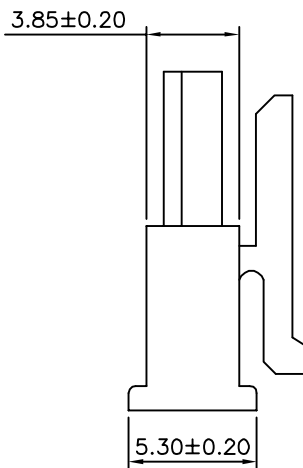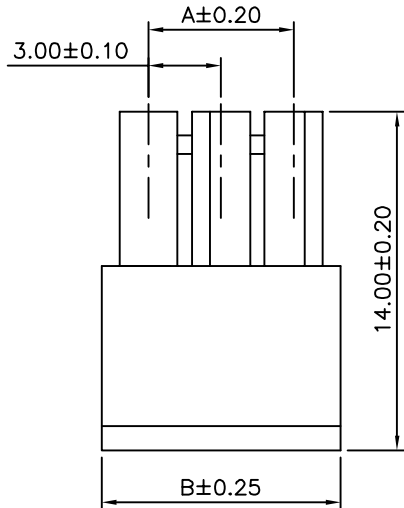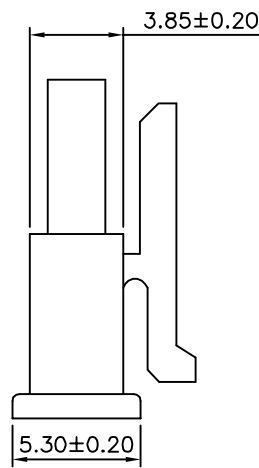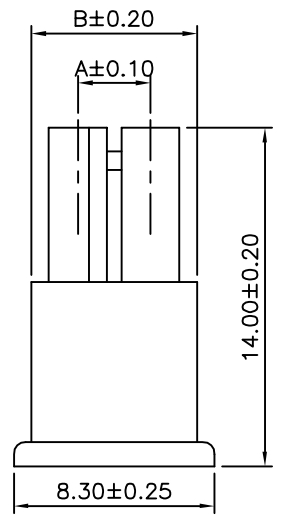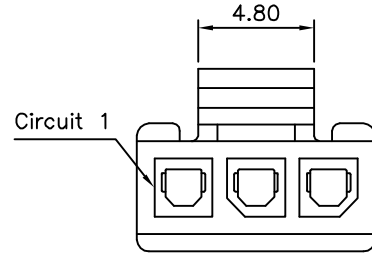


Pin	A	B
02	3.00	6.85
03	6.00	9.85
04	9.00	12.85
05	12.00	15.85
06	15.00	18.85
07	18.00	21.85
08	21.00	24.85
09	24.00	27.85
10	27.00	30.85
11	30.00	33.85
12	33.00	36.85


**4UCON** 元化興業股份有限公司  
4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.30 .X ±0.25 .XX ±0.20 .XXX ±0.015
08621		EMILY		
		CHECKED BY		
		HZF		
		DRAWING BY		
		YBL		
SCALE	NONE	REV.	A1	UNIT
				mm


NO.	REV.	REVISIONS	CHK	DATE
△A1		Modify Data	HZF	01/08/2014
△A0		NEW RELEASE	HZF	09/26/2012

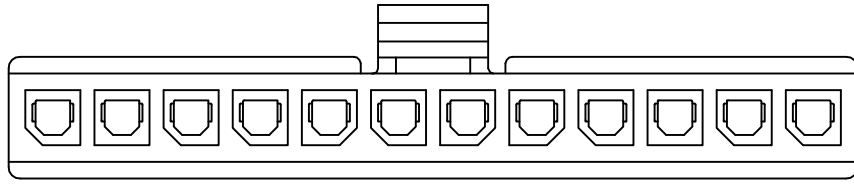


△1X12P

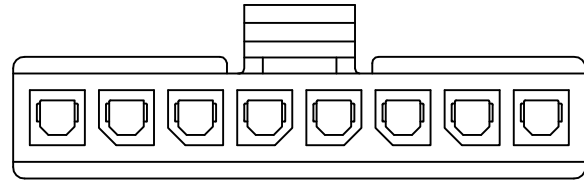


△1X08P




△1X04P

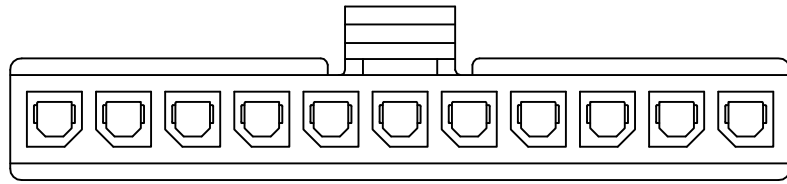


△1X11P

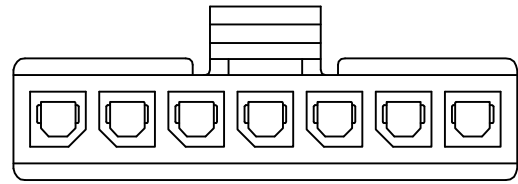


△1X07P




△1X03P

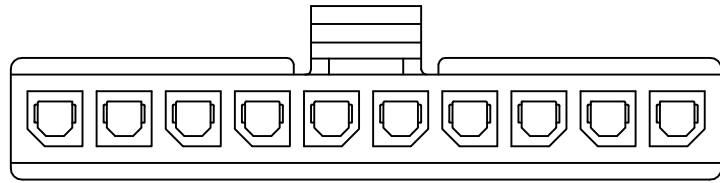


△1X10P

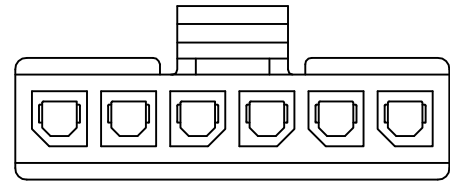


△1X06P



△1X02P

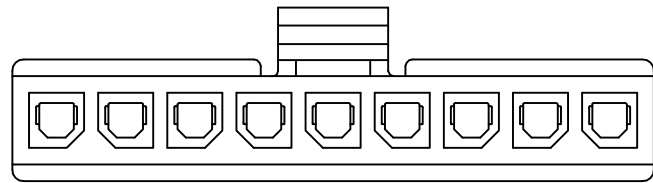

△1X09P

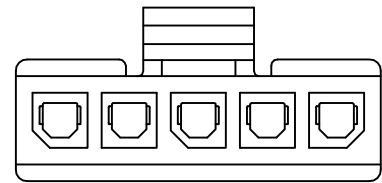

△1X05P

**4UCON** 元化興業股份有限公司  
4UCON TECHNOLOGY INC.

DRAWING No.  
08621

APPROVED BY  
EMILY  
CHECKED BY  
HZF  
DRAWING BY  
YBL

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
X. ±0.30  
.X ±0.25  
.XX ±0.20  
.XXX ±0.015

SCALE NONE

REV. A1

UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△A1		Modify Data	HZF	01/08/2014
△A0		NEW RELEASE	HZF	09/26/2012