

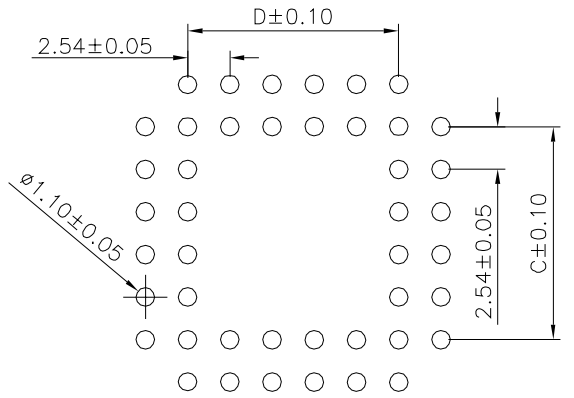


SPECIFICATION
 Current Rating:1.0A AC/DC
 Contact Resistance:30 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Withstanding Voltage:500V AC/Minute
 Temperature Range:-50°C~+105°C
 Insulator:PPS(UL94V-0),Brown
 Bottom Cover:PBT(UL94V-0),Brown
 Contact:Phosphor Bronze,Tin Plated
 RoHS Compliant

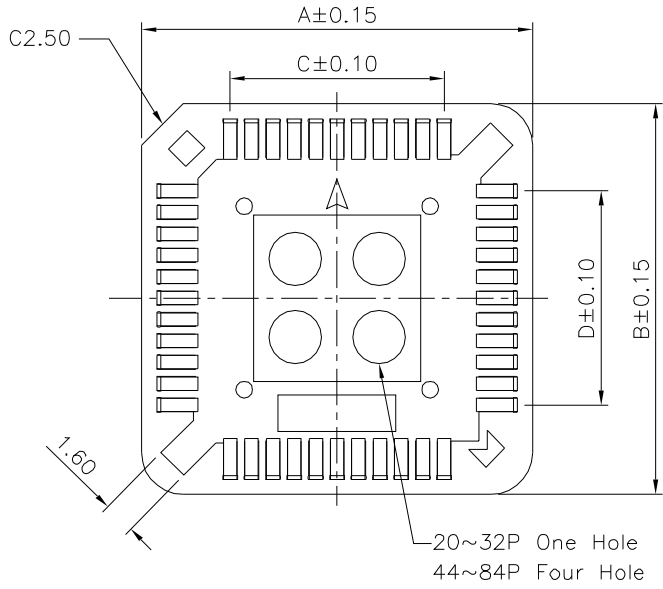

Recommended P.C.B. Layout

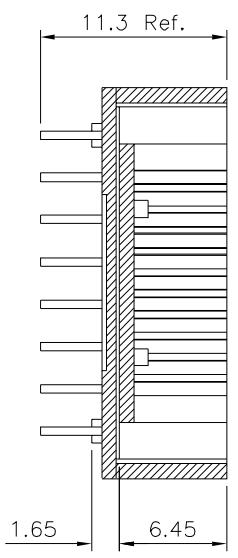

| Contact | A | B | C | D |
|---------|-------|-------|-------|-------|
| 20 | 15.50 | 15.50 | 5.08 | 5.08 |
| 28 | 18.04 | 18.04 | 7.62 | 7.62 |
| 32 | 18.04 | 20.60 | 7.62 | 10.16 |
| 44 | 23.48 | 23.48 | 12.70 | 12.70 |
| 52 | 25.88 | 25.88 | 15.24 | 15.24 |
| 68 | 31.04 | 31.04 | 20.32 | 20.32 |
| 84 | 36.04 | 36.04 | 25.40 | 25.40 |

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

| | | | | |
|-------------|------|----------------|----|--|
| DRAWING No. | | APPROVED BY | | UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.25 .XX ±0.15 ANG. |
| 08736 | | MEI | | |
| | | CHECKED BY HZF | | |
| | | DRAWING BY LZX | | |
| SCALE | NONE | REV. | A0 | UNIT mm |

| | | | | |
|------|------|-------------|-----|------------|
| NO. | REV. | DESCRIPTION | CHK | DATE |
| △ A0 | | NEW RELEASE | HZF | 07/22/2023 |
| | | REVISIONS | | |