
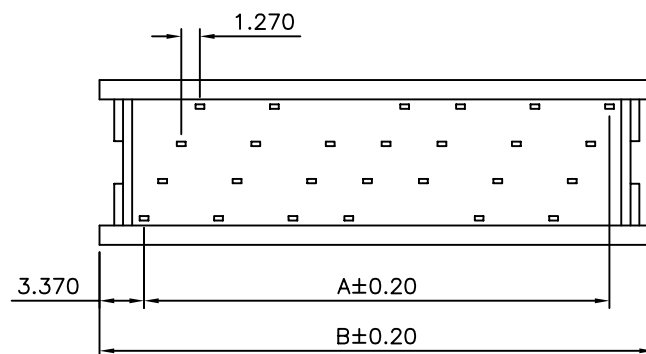

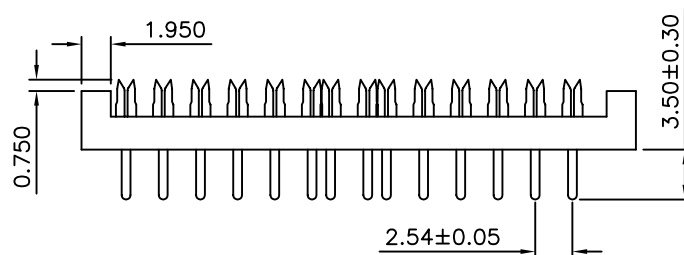



SPECIFICATIONS

Current Rating: 3A AC,DC
 Voltage Rating: 250V AC Max.
 Temperature Range: -40°C~+105°C
 Contact Resistance: Initial Value/10 Milliohms Max.
 After Environmental Testing/20 Milliohms Max.
 Insulation Resistance: 1000 Megohms Min.
 Withstand Voltage: 500V AC/Minute
 Applicable Wires: AWG 18,7 Strands
 Applicable PC Board Thickness: 1.6mm
 Insulator: PBT+30% Glass Fiber(UL 94V-0)

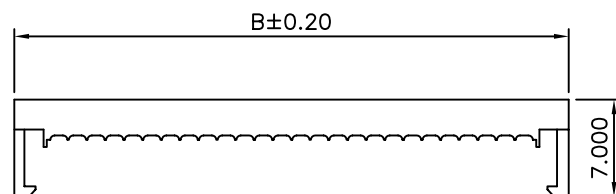

Pin	A	B
10	11.43	18.17
16	19.05	25.79
20	24.13	30.87
26	31.75	38.49
34	41.91	48.65
40	49.53	56.27
50	62.23	68.97
60	74.93	81.67

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

08853

APPROVED BY

MEI

CHECKED BY

BECKY

DRAWING BY

HZF

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

.X ± 0.38

.XX ± 0.25

ANG.

UNIT

mm



NO.

REV.

AO

NEW RELEASE

REVISIONS

CHK

DATE

BECKY

08/26/2005

DATE

SCALE

NONE

REV.

AO